



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

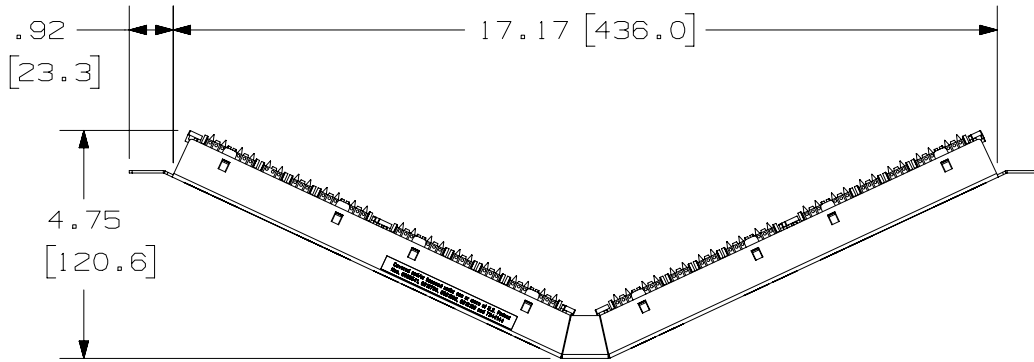

PANDUIT PART NUMBER	WEIGHT
NKA6PPG48Y	2.36 lb (1070.48 g)

- NOTES:
- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
  - MATERIAL:  
 PANEL HOUSING: STEEL  
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0  
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0  
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B  
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
  - 48 PORT ANGLED PATCH PANEL 8 POSITION 8 WIRE.
  - THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
  - FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
  - DIMENSIONS IN BRACKETS ARE IN METRIC.
  - USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
  - RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

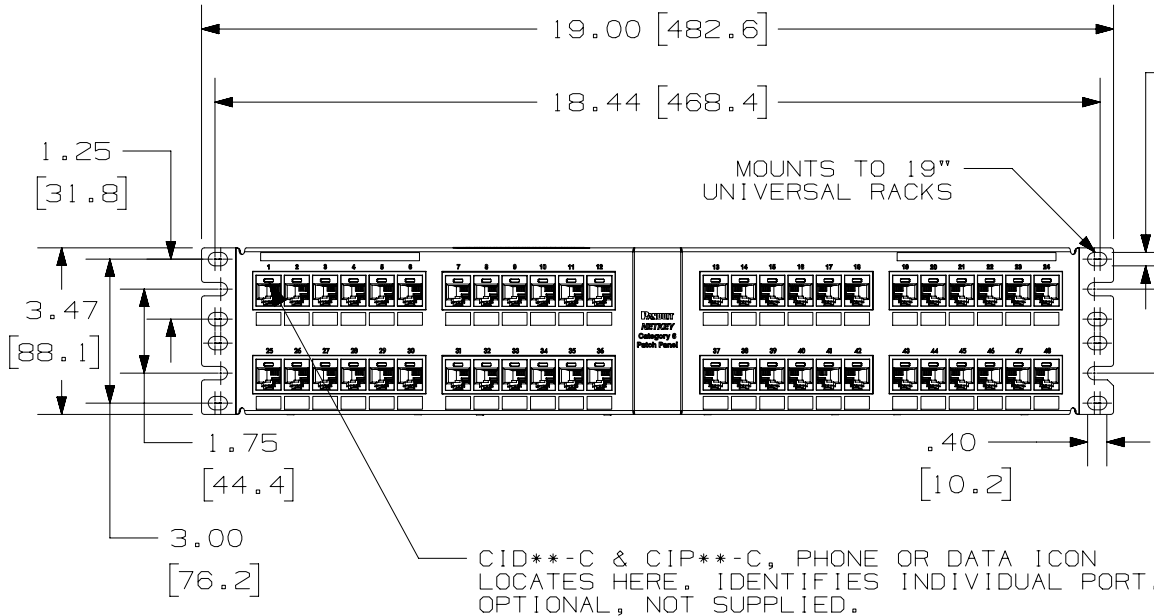

PART NUMBER	SEE CHART	PRODUCT SPEC/PKG SPEC	N/A
I.I. NUMBER	N/A	WORK INSTRUCTION	N/A
TITLE			
<b>NETKEY CAT6 48 PORT ANGLED PATCH PANEL</b>			
CUSTOMER DRAWING			
ITEM REVISION NAME		<b>PANDUIT</b>	
M02088AN/01			
DATASET FILE NAME			
M02088AN_DC44/01A		MATERIAL:	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]			
.x ± .1 [ 2.54 ]		.xxx ± .005 [ .127 ]	
.xx ± .01 [ .25 ]		ANGLES ± 5 °	
		THIRD ANGLE PROJECTION	
DRAWN BY	DATE	CHK	SCALE
LZ	1-23-13	MBVE	.25:1
DRAWING NUMBER:			02088-44
SHT 1 OF 1			A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
2	10-1-18	BAME	KRKE	MMR	A. REMOVED M6 SCREWS	M09000HW
1	10-2-13	BJN	SCAL	JCK	ADDED NEW PANDUIT DRAWING FORMAT	02088-44
R	1-29-13	LZ	MBVE	JCK	RELEASED TO PRODUCTION	02088-44

D10100DA/14