

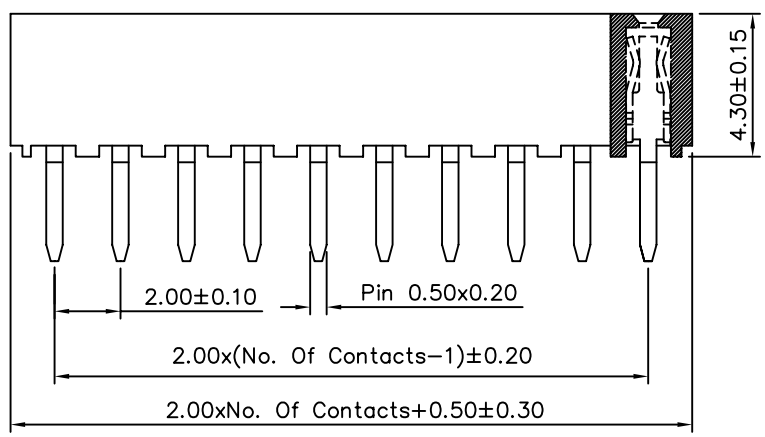
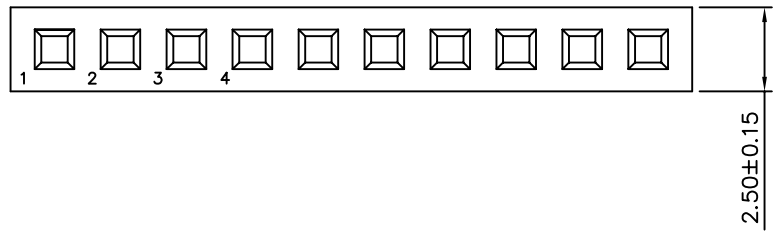


SPECIFICATIONS

Current Rating: 1.5 Amp
 Insulator Resistance: 1000 Megohms Min.
 Contact Resistance: 20 Milliohms Max.
 Dielectric Withstanding: AC 500V/Minute
 Operating Temperature: -40°C To +105°C
 Contact: Phosphor Bronze, Gold Flash Over All
 Insulator: Polyester, PA6T+30%GF, UL 94V-0

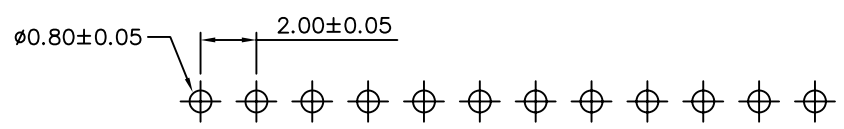

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX ±0.12					
00286		MEI							
		CHECKED BY							
		BECKY							
		DRAWING BY							
		HZF							
SCALE	NONE	REV.	B1	UNIT	mm	NO.	REV.	REVISIONS	
						B1	Modify PA66 → PA6T	SHIN	02/06/2006
						B0	NEW RELEASE	BECKY	09/30/2005
						CHK			DATE