


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9205-HS
 INSULATOR: HEAT SHRINK TUBING. BLACK.
 BODY: NICKEL UNDERPLATED BRASS.
 CONTACT: GOLD FLASH OVER NICKEL UNDERPLATED BRASS.
 GOLD FLASH BeCu SPRING.
2. P/N: W-200/COLOR
 22AWG TINNED COPPER
 0.070 [1.78] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.
3. PERFORMANCE
 MAXIMUM CURRENT: 2.5 AMPS
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
 HANDS FREE: 1000 W.V.D.C.
 MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

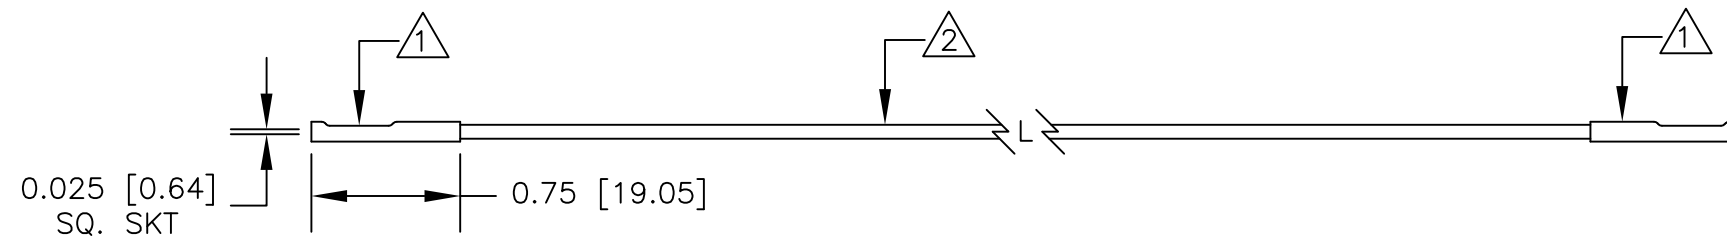

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L. 11/12	DESCRIPTION 0.025 [0.64] SQ. SOCKET (9205-HS) JUMPER	
			APPROVED BY			
NEXT ASSY	USED ON	FINISH SEE NOTE.	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
APPLICATION		DO NOT SCALE DRAWING	B	08505	9110	
			SCALE	1:1	SHEET 1 OF 1	