

ignion[™]


Your innovation.
Accelerated.

CUBE mXTEND[™] (NN02-250)

DATASHEET

CUBE mXTEND[™] (NN02-250)

The CUBE mXTEND[™] antenna booster is an **ultra-narrow**, off-the-shelf component of 5.0mm x 5.0mm x 5.0mm dimensions. This antenna booster has been specifically designed for providing multiband performance in wireless devices for 2G/3G/4G bands.

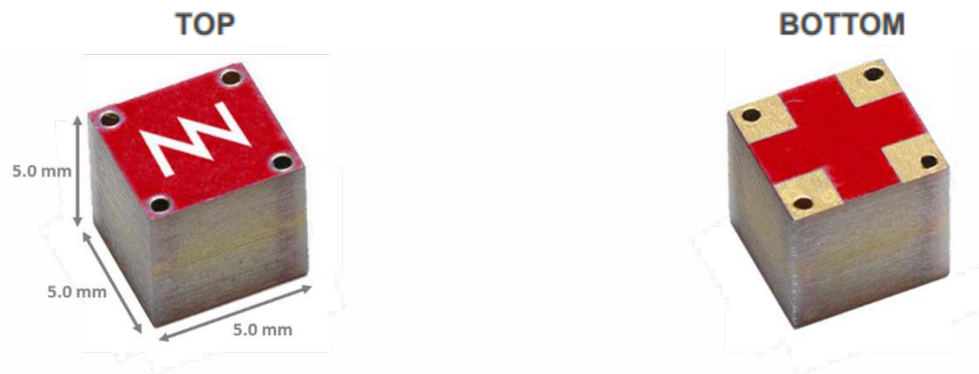

Product Benefits

- **Smallest footprint:** Multiband cellular IoT performance in the smallest footprint: 5.0 mm x 5.0 mm x 5.0 mm.
- **Multiband & Multiport:** 2G/3G/4G/5G, LTE-M and NB-IoT applications.
- **Global reach:** Through multiband performance (compatible with multiple regional standards).
- **Reliability:** Off-the-Shelf standard product, no antenna part customization (electronic optimization).
- **Use cases:** Small tracking devices, IoT sensors and IoT cellular/ISM modules and mobile devices.

Operation Bands Summary

- GSM, UMTS, LTE (824 – 960MHz, 1710 – 2690MHz)

1. AVAILABLE SOLUTIONS SUMMARY

Class	Frequency Regions	Frequency range	Part Number
1 Port	2	824-960 MHz & 1710 – 2170 MHz	<u>CELLULAR UMTS</u>
2 Ports	2	824 – 960 MHz & 1710 – 2690 MHz	<u>CELLULAR LTE</u>

2. DETAILED AVAILABLE SOLUTIONS

2.1. UMTS SOLUTION

Technical features	824 – 960 MHz	1710 – 2170 MHz
Average Efficiency	> 50 %	> 70 %
Peak Gain	0.7 dBi	2.0 dBi
VSWR	< 3:1	
Radiation Pattern	Omnidirectional	
Polarization	Linear	
Weight (approx.)	0.25 g	
Temperature	-40 to +125 °C	
Impedance	50 Ω	
Dimensions (L x W x H)	5.0 mm x 5.0 mm x 5.0 mm	

Technical features. Measures from the evaluation board (131 mm x 60 mm x 1 mm).

2.2. LTE SOLUTION


Technical features	824 – 960 MHz	1710 – 2690 MHz
Average Efficiency	> 50 %	> 70 %
Peak Gain	1.4 dBi	3.6 dBi
VSWR	< 3:1	
Radiation Pattern	Omnidirectional	
Polarization	Linear	
Weight (approx.)	0.25 g	
Temperature	-40 to +125 °C	
Impedance	50 Ω	
Dimensions (L x W x H)	5.0 mm x 5.0 mm x 5.0 mm	

Technical features. Measures from the evaluation board (131 mm x 60 mm x 1 mm).

2.3. ANTENNA FOOTPRINT

Measure	mm
A	1.7
B	1.6
C	2.0

Tolerance: ± 0.1
mm

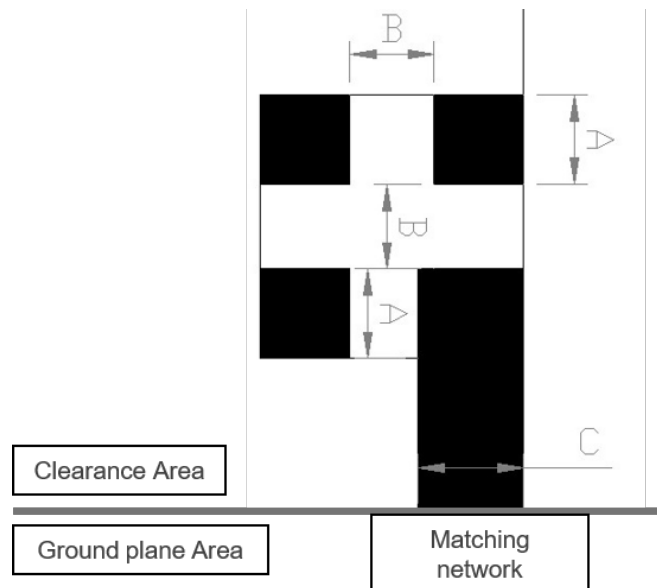

Footprint dimensions for the single booster.

If you need assistance to design your matching network, please contact support@ignion.io

You can also try our free of charge¹ [NN Wireless Fast Track service](#) you will receive a tailored antenna design approach for free in 24h¹. discover the feasibility of your next wireless project including the antenna!

¹ See terms and conditions for a free NN Wireless Fast-Track service in 24h at: <https://www.ignion.io/fast-track-project/>

ignion[™]

Your innovation.
Accelerated.

Contact:
support@ignion.io
+34 935 660 710

Barcelona

Av. Alcalde Barnils, 64-68 Modul C, 3a pl.
Sant Cugat del Vallés
08174 Barcelona
Spain

Shanghai

Shanghai Bund Centre
18/F Bund Centre, 222 Yan'an Road East,
Huangpu District
Shanghai, 200002
China

New Delhi

New Delhi, Red Fort Capital Parsvnath Towers
Bhai Veer Singh Marg, Gole Market,
New Delhi, 110001
India

Tampa

8875 Hidden River Parkway
Suite 300
Tampa, FL 33637
USA