


REV.	REGION	DESCRIPTION	DATE	BY
A		PRELIMINARY RELEASE	30.Jun.20	Falcon

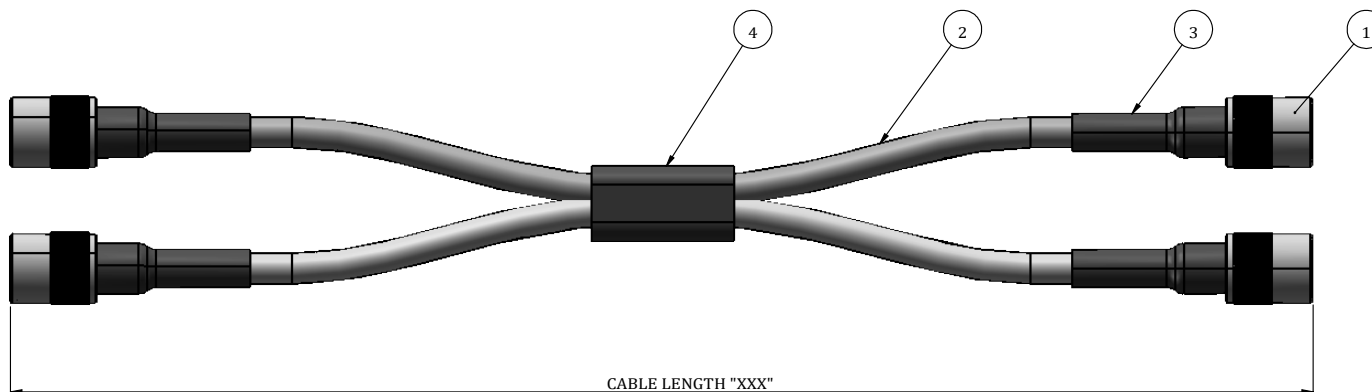

PART NUMBER	LENGTH (CM)	TOLERANCE (mm)	Max VSWR Up to 65Ghz	Max insertion loss(dB) Up to 65Ghz
TM28THSSTS16-P	16	± 5	1.40:1	1.76
TM28THSSTS20-P	20	± 5	1.40:1	2.20
TM28THSSTS31-P	31	± 5	1.40:1	3.41
TM28THSSTS46-P	46	± 8	1.40:1	5.06
TM28THSSTS61-P	61	± 8	1.40:1	6.71
TM28THSSTS76-P	76	± 8	1.40:1	8.36
TM28THSSTS91-P	91	± 8	1.40:1	10.01
TM28THSSTS100-P	100	± 12	1.40:1	11.00
TM28THSSTS122-P	122	± 12	1.40:1	12.20

NOTE(S):

- 1, SOLDER PER IPC J-STD-001, USING LEAD FREE SOLDER.
- 2, NOMINAL TOLERANCE REFR TO ISO2768-F.
- 3, CABLE LENGTH TOLERANCE REFER TO ISO2768-V, AND TOLERANCE VALUE MULTIPIED BY 2.
- 4, WORK ORDER LABEL NOT SHOWN WILL BE ATTACHED TO CABLE .
- 5, MATECHED CABLE @2.0pS AND PACKAGED OR SUPPLIED TOGETHER .

4	M23053/5-106-0	SEMI-REGID , 1/4 HST BLACK	1"
3	M23053/4-101-0	ADHESIVE , 1/8 HST BLACK	2"
2	16707052-02	28 AWG , SILICON JACKET CABLE	SEE TABLE "XXX" + "XXX"
1	TM7S-ST5-00	CONN, SSMP, FEMALE, STRAIGHT, TL	4
ITEM	PART NUMBER	DESCRIPTION	QTY

RoHS Compliant

ISO2768-V (mm)					
6~30	30-120	120~400	400~1K	1K~2K	>2K
±1	±1.5	±2.5	±4	±6	±8
ISO2768-F (mm)					
0.5~3	3~6	6~30	30~120	120~400	400~1000
±0.05	±0.05	±0.1	±0.1	±0.2	±0.3

☆ KEY DIMENSION NEED 100% INSPECTION (XX) REF. DIMENSION FOR REF. ONLY	DRAWN: Falcon		Dongguan City,Guangdong P.R. China 523533		
	CHECKED:		MATERIAL:	PROJECT NAME:	
	APPROVED:		PART NUMBER: TM28THSSTSXX-P	ASSY, 052 SIL, SSMP ST(F)x2, XXcm, PAIR	
INFORMATION CONTAINED ON THIS DRAWING IS CONFIDENTIAL AND MAY ALSO CONTAIN PROPRIETARY CARLISLE/CUSTOMER INFORMATION. DRAWING CONTENT IS ONLY INTENDE FOR USE OF THE ABOVE CUSTOMER IF YOU ARE NOT THE INTENDE RECIPIENT OR AUTHORIZED EMPLOYEE OF ABOVE COMPANY NAME, YOU ARE HEREBY NOTIFIED ANY USE, DUPLICATION, RECONSTRUCTION, OR DISTRIBUTION OF DRAWING INFORMATION IS STRICTLY PROHIBITTED.		SIZE A4		PART NAME: CABLE ASSEMBLY	REVISION: A DATA: 30.Jun.20
SCALE 2:1		DO NOT SCALE DRAWING		SHEET 1 OF 1	