


## Thin Broadband Millimeter Wave Absorber

### THIN BROADBAND MILLIMETER WAVE ABSORBER



Eccosorb MMI is a flexible absorber based on dielectric loss fillers. It gives excellent performance between 35 – 100 GHz. Due to the chemical nature of the dielectric pigmentation system, no oxidation is possible. As such, the product resists outdoor conditions very well.

### FEATURES AND BENEFITS

- Millimeter wave
- Flexible
- Thin
- High frequency applications
- Excellent outdoor exposure

### MARKETS

- Automotive
- Commercial Telecom
- Medical
- Industrial

### SPECIFICATIONS

TYPICAL PROPERTIES	ECCOSORB MMI
Weight (1mm thickness)	2.2 kg/m <sup>2</sup>
Water absorption	Impervious to water
Service Temperature°C(°F)	-55 to 165 (-67 to 329)
Frequency Range	≥ 35 GHz
Fire Retardancy	UL94 V-1

*Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.*


### APPLICATIONS

- Eccosorb MMI has been applied successfully in automotive applications for collision avoidance and blind spot detection.
- 4G and 5G macro and microcell networks including backhaul and P2P
- Imaging/probing equipment that uses electromagnetic energy

### AVAILABILITY

- Standard sheet size is 30 cm x 30 cm, thickness 0.5 or 1 mm. Customized shapes and thicknesses can be supplied, as well as sheets with self-adhesive backing (suffix –SA).

USA: +1.866.928.8181  
 Europe: +49.8031.24600  
 Asia: +86.755.2714.1166  
[www.laird.com](http://www.laird.com)

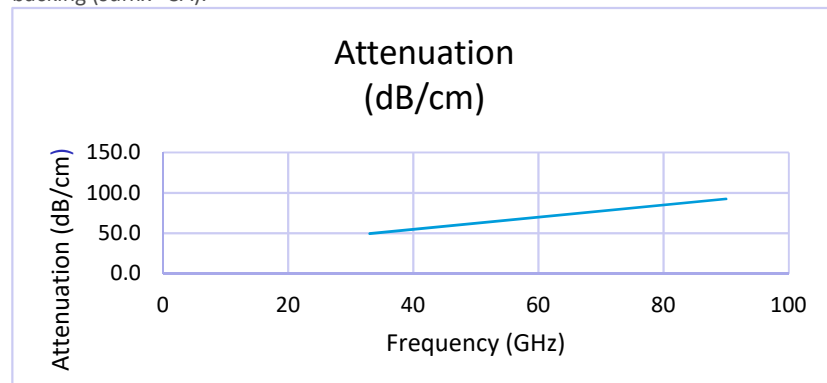

RFP-DS-MMI 081815