# 178289-6 - ACTIVE

## Dynamic Series | Dynamic 3000 Series

TE Internal #: 178289-6 Housing, Receptacle, Wire-to-Board, 12 Position, .15 in [3.81 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Wire & Cable, Dynamic 3000 Series

### View on TE.com >

#### Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >



Receptacle and Tab Housing: 3.81 mm pitch, 250V

Connector Product Type: Housing

Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 12

Centerline (Pitch): 3.81 mm [.15 in]

All Receptacle and Tab Housing: 3.81 mm pitch, 250V (45)



## Features

## Product Type Features

Connector Product Type	Housing			
Connector & Housing Type	Receptacle			
Connector System	Wire-to-Board			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	12			
Number of Rows	2			
Body Features				
Primary Product Color	Black			
Termination Features				

Housing, Receptacle, Wire-to-Board, 12 Position, .15 in [3.81 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Wire & Cable, Dynamic 3000 Series



Termination Method to Wire & Cable	Crimp			
Mechanical Attachment				
Mating Retention	With			
Connector Mounting Type	Cable Mount (Free-Hanging)			
Housing Features				
Centerline (Pitch)	3.81 mm[.15 in]			
Dimensions				
Row-to-Row Spacing	5.08 mm[.2 in]			
Usage Conditions				
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]			
Operation/Application				
Circuit Application	Power & Signal			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Housing, Receptacle, Wire-to-Board, 12 Position, .15 in [3.81 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Wire & Cable, Dynamic 3000 Series




## **Compatible Parts**



# Also in the Series | Dynamic 3000 Series

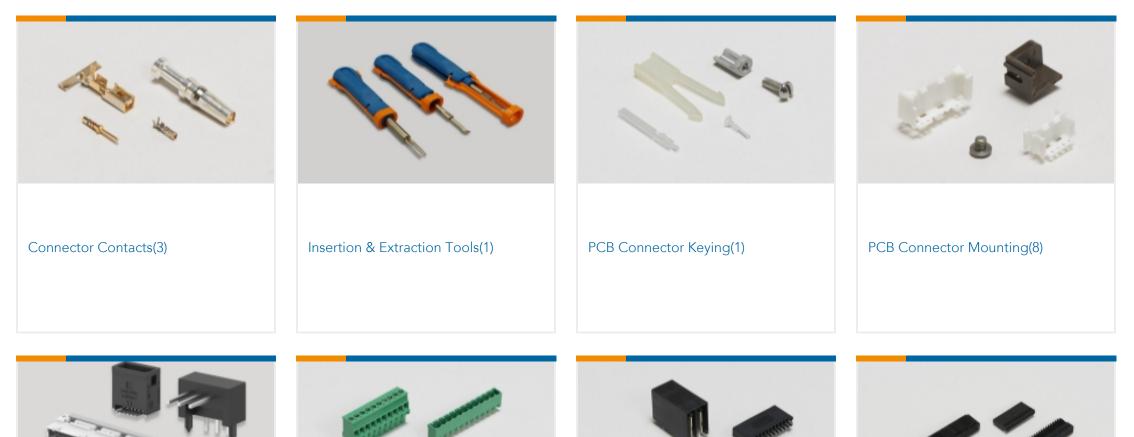

STRATTON .	and the second s		
PCB Headers & Receptacles(283)	PCB Terminal Blocks(25)	Standard Rectangular Connectors(2)	Wire-to-Board Connector Assemblies & Housings(152)

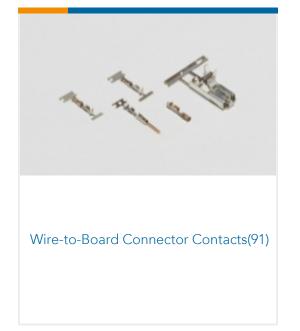

Customers Also Bought

Housing, Receptacle, Wire-to-Board, 12 Position, .15 in [3.81 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Wire & Cable, Dynamic 3000 Series







## Documents

**Product Drawings** DYNAMIC 3100 REC HSG 12P DBL

Japanese

**CAD** Files **Customer View Model** ENG\_CVM\_CVM\_178289-6\_P.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_178289-6\_P.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_178289-6\_P.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages 1-1773732-4\_DYNAMIC\_SERIES\_CATALOG\_ENGLISH

Japanese

1-1773732-4\_DYNAMIC\_SERIES\_CATALOG\_ENGLISH

English

**Product Specifications** 

**Product Specification** 

English

Housing, Receptacle, Wire-to-Board, 12 Position, .15 in [3.81 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Wire & Cable, Dynamic 3000 Series



Product Environmental Compliance

MD\_178289-6\_010320181120\_dmtec

English

MD\_178289-6\_010320181120\_dmtec

English

Agency Approvals TUV Certificate

English