

# PSR-ESS-ACC-CB1-NC-SC - Contact module



1221752

<https://www.phoenixcontact.com/us/products/1221752>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact module for modular emergency stop switches with force-guided N/C contact for safety-related shutdown, in conjunction with appropriate evaluation unit suitable for use up to PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061)

## Product description

Phoenix Contact emergency stop switches are electromechanical switching devices with a safety function. They are used to safely shut down or stop machines and systems in order to prevent or minimize personal injury and property damage. The portfolio includes a modular system as well as a preconfigured solution. The modular emergency stop switch is comprised of the following components: – PSR-ESS-M0-H100 /...110 / ...120 actuator – PSR-ESS-ACC-CB1-C... module holder – PSR-ESS-ACC-CB1-NC-SC or PSR-ESS-ACC-CB1-SM-SC safe contact module Further contact modules can be combined if required.

## Your advantages

- Modular system allows an efficient solution for individual applications
- Direct opening action in accordance with IEC 60947-5-1
- In applications with appropriate evaluation device suitable for use up to PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061)

## Commercial data

Item number	1221752
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN04
Product key	DNA62Z
GTIN	4063151310868
Weight per piece (including packing)	25.2 g
Weight per piece (excluding packing)	23.2 g
Customs tariff number	85365080
Country of origin	DE

# PSR-ESS-ACC-CB1-NC-SC - Contact module



1221752

<https://www.phoenixcontact.com/us/products/1221752>

## Technical data

### Product properties

Product type	Contact module
Product family	Modular emergency stop switches
Application	Safe shutdown

### Insulation characteristics

Protection class	II
------------------	----


### Insulation characteristics

Overvoltage category	III
Pollution degree	3

### Electrical properties

Rated surge voltage	4 kV
---------------------	------

### Dimensions

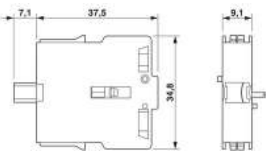Dimensional drawing	
Width	9.1 mm
Height	34.8 mm
Depth	44.6 mm

### Material specifications

Flammability rating according to UL 94	V0
Housing material	PA

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-30 °C ... 70 °C (in conjunction with lighting module max. 65°C)
Ambient temperature (storage/transport)	-50 °C ... 85 °C
Maximum altitude	max. 2000 m (Above sea level)
Shock	15g / 11 ms, in accordance with IEC 60068-2-27
Vibration (operation)	10 Hz ... 500 Hz, 0.35 mm amplitude, 5g, in accordance with IEC 60068-2-6

### Mounting

Mounting type	Plug-in mounting
Mounting position	any

# PSR-ESS-ACC-CB1-NC-SC - Contact module



1221752

<https://www.phoenixcontact.com/us/products/1221752>

Connection method	Screw connection
-------------------	------------------

# PSR-ESS-ACC-CB1-NC-SC - Contact module




1221752

<https://www.phoenixcontact.com/us/products/1221752>

## Drawings

Dimensional drawing

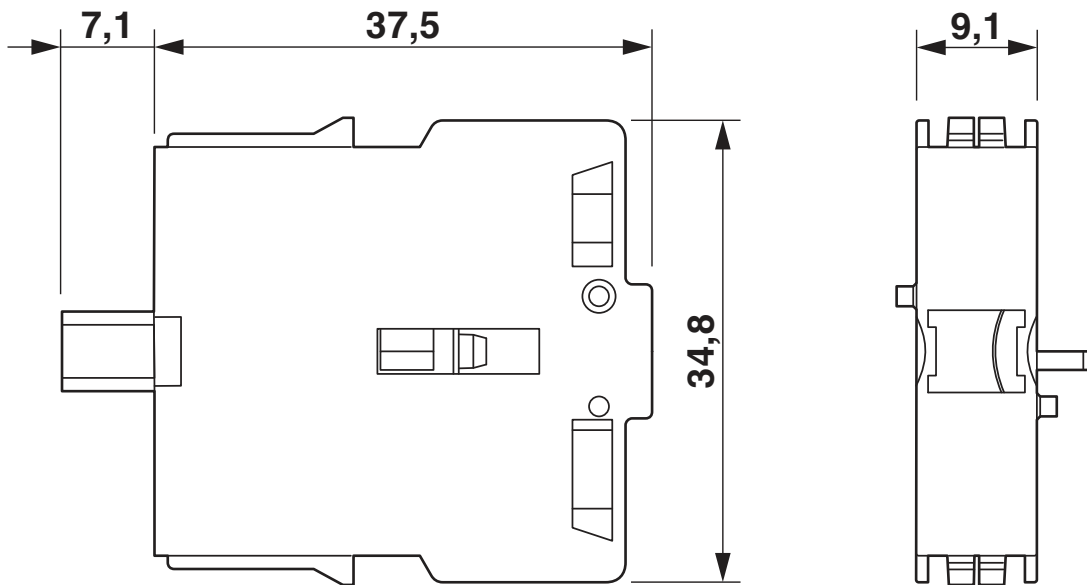

Dimensions (in mm)

1221752

<https://www.phoenixcontact.com/us/products/1221752>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1221752>



### UL Listed

Approval ID: FILE E 140324



### cUL Listed

Approval ID: FILE E 140324

### Functional Safety

Approval ID: B 029429 0031



### EAC

Approval ID: RU\*DE\*B\*00073/21

### cULus Listed

# PSR-ESS-ACC-CB1-NC-SC - Contact module



1221752

<https://www.phoenixcontact.com/us/products/1221752>

## Classifications

### ECLASS

ECLASS-11.0	27371302
ECLASS-12.0	27371302
ECLASS-13.0	27371302

### ETIM

ETIM 8.0	EC000041
----------	----------

### UNSPSC

UNSPSC 21.0	39122200
-------------	----------

# PSR-ESS-ACC-CB1-NC-SC - Contact module



1221752

<https://www.phoenixcontact.com/us/products/1221752>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# PSR-ESS-ACC-CB1-NC-SC - Contact module



1221752

<https://www.phoenixcontact.com/us/products/1221752>

## Accessories

### PSR-ESS-ACC-CB1-C3 - Module holder

1221747

<https://www.phoenixcontact.com/us/products/1221747>



Module holder for modular emergency stop switches, connects the contact block and actuator with bayonet lock, suitable for 3 elements

---

### PSR-ESS-ACC-CB1-C5 - Module holder

1221745

<https://www.phoenixcontact.com/us/products/1221745>



Module holder for modular emergency stop switches, connects the contact block and actuator with bayonet lock, suitable for 5 elements



# PSR-ESS-ACC-CB1-NC-SC - Contact module



1221752

<https://www.phoenixcontact.com/us/products/1221752>

## PSR-ESS-M0-H100 - Actuator

1221758

<https://www.phoenixcontact.com/us/products/1221758>



Actuator for modular emergency stop switches, for combination with module holder and contact module as a functional unit, panel installation, bayonet lock

---

## PSR-ESS-M0-H110 - Actuator

1221757

<https://www.phoenixcontact.com/us/products/1221757>



Actuator with anti-lock collar for modular emergency stop switches, for combination with module holder and contact module as a functional unit, panel installation, bayonet lock

# PSR-ESS-ACC-CB1-NC-SC - Contact module



1221752

<https://www.phoenixcontact.com/us/products/1221752>

## PSR-ESS-M0-H120 - Actuator

1221753

<https://www.phoenixcontact.com/us/products/1221753>



Actuator with light-up anti-lock collar for modular emergency stop switches, for combination with module holder and contact module as a functional unit, panel installation, bayonet lock

---

## PSR-ESS-ACC-CB1-SM-SC - Contact module

1221749

<https://www.phoenixcontact.com/us/products/1221749>



Contact module for modular emergency stop switches with force-guided N/C contact for safety-related shutdown, N/O contact for assembly monitoring, in conjunction with appropriate evaluation unit suitable for use up to PLe (EN ISO 13849-1), SIL 3 (EN IEC 62061)

## PSR-ESS-ACC-CB1-NC-SC - Contact module

1221752

<https://www.phoenixcontact.com/us/products/1221752>



## PSR-ESS-ACC-CB1-NO-SC - Contact module

1221751

<https://www.phoenixcontact.com/us/products/1221751>



Contact module for modular emergency stop switches with N/O contact for feedback function through actuation of the emergency stop switch

## PSR-ESS-ACC-CB1-I-SC - Contact module

1221748

<https://www.phoenixcontact.com/us/products/1221748>



Lighting module for modular emergency stop switches, suitable for PSR-ESS-M0-H120 actuator

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)