

HC-HV 3-SMLD-52/M2PG16

Order No.: 1773637


The illustration shows a box mounting base version for double locking latch, with protective cover



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1773637>

Box mounting base, with single locking latch, height 52 mm, with screw connection, 2x Pg29, with protective covers

Commercial data

GTIN (EAN)	 4 017918 115791
Note	Made-to-order
sales group	D003
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 245 (PC-2005)

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	For contact inserts HV-HV3
Design	HV3
Height	52 mm
Width	52 mm
Length	93 mm
Housing type	Box mounting base with cover
Locking type	With single locking latch
Type of the screw connection	2x Pg16
Pg screw connection	With
Wrench size, union nut	22 mm
External cable diameter	7.5 mm ... 15 mm
Protective cover	Yes
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Cable gland material	Nickel-plated brass
Cable seal material	NBR
Material lock	High-grade steel
Material grip body interlock	PA-GF
Material, protective cover	PA

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

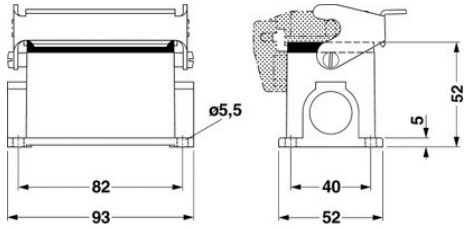

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;