DRAWING MADE IN AMERICAN PROJECTION

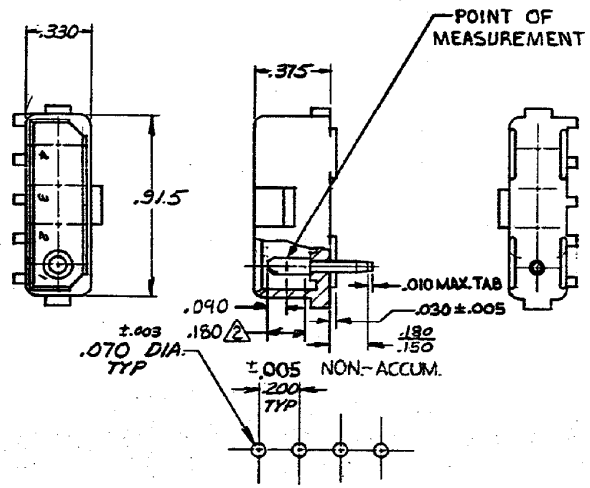

RECOMMENDED LAYOUT FOR .062 THICK P.C. BOARD

1. PARTS COMPLY WITH TE SOLDERABILITY SPEC. 109-11-3
2. CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND TIN PLATED ON SOLDER TAIL END.
3. DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

ASSEMBLY NO.	HSG. MATL & COLOR	PIN MATL & FINISH
5-350543-2	NYLON - GREEN	COPPER ALLOY - GOLD 2
350543-2	NYLON - NATURAL	COPPER ALLOY - GOLD 2
350543-1	NYLON - NATURAL	COPPER ALLOY PRE-TIN

SUPERSEDED BY 1586534-2

CUSTOMER COPY REFERENCE ONLY

LTR	REVISION RECORD	DR	CHK	DATE
N4	REVISED PER ECR-21-117185	VS	PJ	25OCT2021
N3	REVISED PER ECR-18-008156	JB	DZ	12NOV 2013
N2	REVISED PER ECR-13-008342	AV	RP	12NOV 2013
N1	REVISED PER ECO-11-005294	RK	HMR	12APR 11

REQUIRED PER ASSEMBLY

DESCRIPTION

DRAWING NUMBER 350543

DR 3-30-73 G. Eckman
CHK 4/4/73 C.M. Alhouajc
DE J. Kemble 4-10-73
APP J. Kemble 4-10-73

MATERIAL AND FINISH: SEE TABLE
WIRE RANGE — INSULATION
TOLERANCE EXCEPT AS NOTED ± .015 ± 1°
SCALE 4/1

TE Connectivity
CLASS .064 DIA. PIN
TYPE POSITIVE LOCK
LOC CAV. B
NO. 350543 N4
NAME 4 CIRCUIT MATE-N-LOK P.C. BOARD HEADER

WAS P-73-6103

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.