

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION NOV , 2005.

REVISIONS



© COPYRIGHT 2005 TE Connectivity Ltd.

ALL RIGHTS RESERVED.



P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	ECO-14-006566	15MAR2019	RZ	RS

NOTES:

- 1 PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3 Ag PLATING
- 4 THIS ITEM MUST BE WHITE
- 5 HAND TOOL : 9-1478240-0
- 6 DIE SET : 9-1478242-0
- 7 ELECTRICAL CHARACTERISTICS
 FREQUENCY RANGE: DC - 4 GHz
 NOMINAL IMPEDANCE: 50 Ohm
 INSULATION RESISTANCE: 5000 MOhm
 WORKING VOLTAGE: 500 Volts RMS at Sea Level
 DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
 CONTACT RESISTANCE:
 CENTRE CONTACT: 1.50 mOhm Max
 OUTER CONTACT: 0.20 mOhm Max
 VSWR @ 4GHz: 1.30:1 Max
 INSERTION LOSS dB @ x 3 GHz: 0.20 Max
- 8 MECHANICAL CHARACTERISTICS
 COUPLING NUT RETENTION FORCE: N/A
 CABLE RETENTION FORCE: 170N Min
 MOUNT NUT RECOMMENDED TORQUE: 4N
 DURABILITY: 500 Cycles Min
- 9 ENVIRONMENTAL CHARACTERISTICS
 OPERATING TEMPERATURE: -65 to +165 DegC

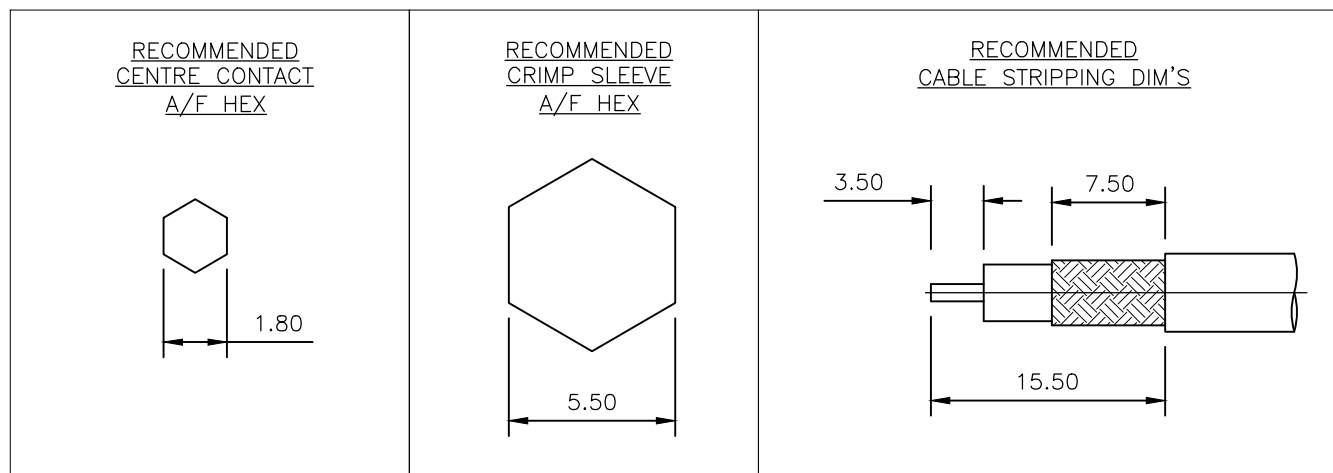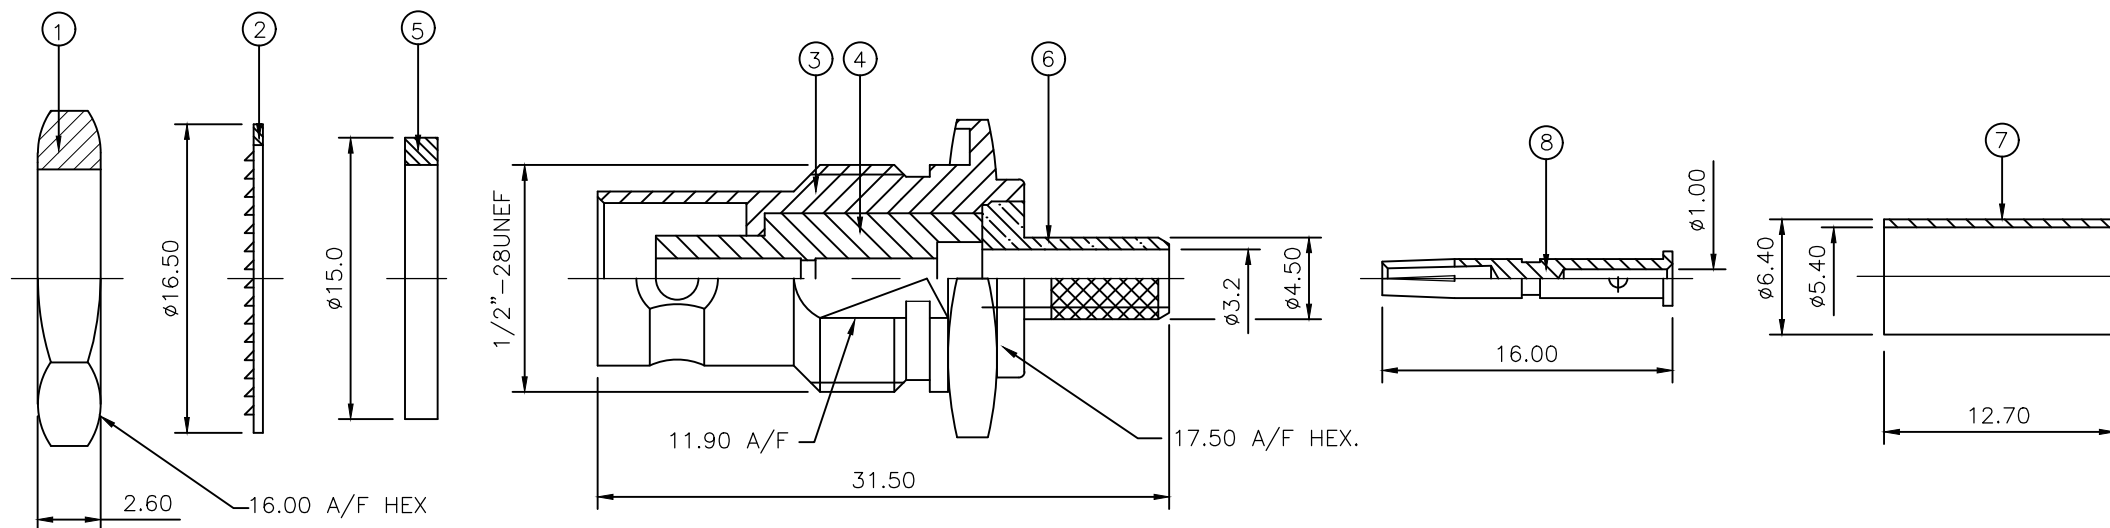

QTY	QTY	MATERIAL	NOTE	DESCRIPTION	ITEM
1	1	BRASS	3	CONTACT	8
1	1	BRASS	3	FERRULE	7
1	1	BRASS	3	CHASSIS	6
1	1	SILICON RUBBER	4	GASKET	5
1	1	PTFE		INSULATION	4
1	1	BRASS	3	BODY	3
1	1	IRON	3	WASHER	2
1	1	BRASS	3	HEX NUT	1
6--0	1--0	MATERIAL		DESCRIPTION	ITEM
QUANTITY PER ASSY		PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SANDWELL 21NOV05	 TE Connectivity NAME BNC BULKHEAD JACK CRIMP 50 OHM RG58C/U, 141A/U, URM43, 76, Belden9907, KX15		
DIMENSIONS: mm		CHK S.PARLOW 18JUL05			
		APVD F.WHEELER-KING 21NOV05			
MATERIAL SEE TABLE		FINISH -			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-3435	SIZE A3		
0 PLC ± -		APPLICATION SPEC 411-3247	CAGE CODE 00779		
1 PLC ± 0.3		WEIGHT 0.000000	DRAWING NO C-1337434		
2 PLC ± 0.2		CUSTOMER DRAWING	RESTRICTED TO -		
3 PLC ± -			SCALE NTS		
4 PLC ± -			SHEET 1 OF 1		
ANGLES ± 5			REV D		