



M8 Cable Assembly 4-poles st/st f/m



Technische Daten:

Bemessungsspannung: 30 V
IEC 61076-2-104

Strombelastbarkeit: 3 A bei 40°C
IEC 61076-2-104

Isolationswiderstand: >=100 MΩ
IEC 60512

Verschmutzungsgrad: 3/2
IEC 60664-1

Schutzart: IP 67, im
IEC 60529 verschraubten Zustand

Umgebungstemperatur: -25°C ... +80°C
EN 60512-11-10 -40°C
EN 60512-11-4 -40°C ... +85°C
UL 2238 -30°C ... +50°C

Steckzyklen: >=100
IEC 60512-9a

Kabeleigenschaften:

Umgebungstemperatur: -25°C ... +80°C

Kabel: TPU, UL 20549
schwarz,
4x0,25mm², Li9Y11Y

Werkstoffe:

Kontakt: CuZn, Ni3 Au 0,2 gal.

Kontaktträger: PA, UL 94 V-0

Dichtung: FPM


Überwurfmutter/-schraube: GD-Zn, Ni

Griffkörper: TPU, UL 94 HB,
schwarz



Montagedaten:

empfohlenes Drehmoment: 0,4 Nm

female



male

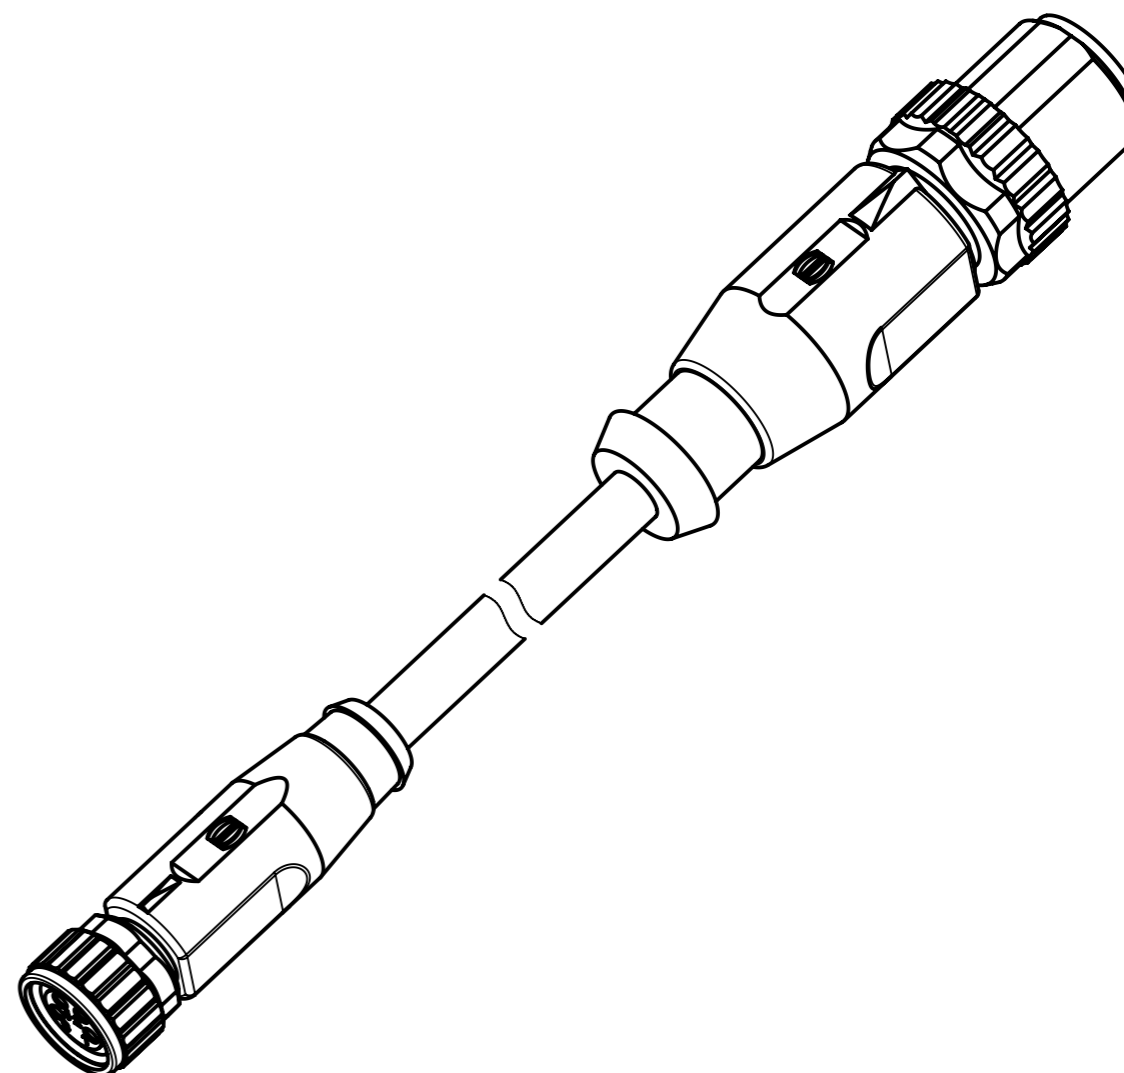

All Dimensions in mm Tech. Character. Free size tol. According to production drawing

	All rights reserved	Created by STOCHECIC Stocheici	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2019-03-05	State Final Release	
	Department HCS - RO	Title M8 Cable Assembly 4-poles st/st f/m				Doc-Key / ECM-Nr. 100802879/UGD/000/A 500000148324	
HARTING Customised Solutions D-32339 Espelkamp		Type DS	Number 21348081489XXX			Rev. A	Page 1/1