



## Amphenol Advanced Sensors

Amphenol Thermometrics (UK) Ltd., Crown Industrial Estate, Priorswood Road, Taunton, Somerset, TA2 8QY, UK Tel +44 (0) 1823 335200 Fax +44 (0) 1823 332637

TEST SPECIFICATION	PART No. <b>YS4020</b>	ISSUE: B	
CUSTOMER: Various	DATE: 9 <sup>th</sup> May 2014	QUANTITY:	
Customer P/N:	ORIGINATOR: M.J.Roberts	PAGE 1 OF 2	

**DESCRIPTION:** PTC THERMISTOR INTENDED FOR USE AS A CURRENT LIMITING PROTECTION DEVICE


## **MECHANICAL SPECIFICATION**

CONSTRUCTION: BARE CERAMIC DISC WITH UNINSULATED LEADWIRES

THICK FILM SILVER ELECTRODES

TERMINATIONS: TIN COATED COPPER WIRE

DIMENSIONS in mm NTS: SEE DRAWING BELOW

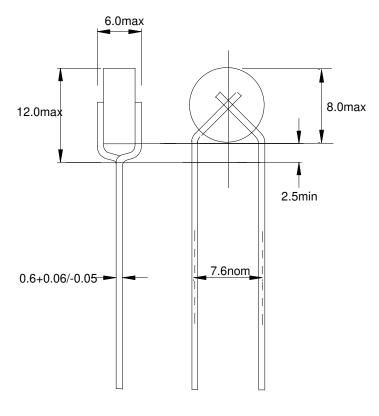

CHANGES SINCE LAST ISSUE: Δ Update to Amphenol								
Issue:	A	В						
Date :	26/02/10	9/05/14						

SERIAL No. YS4020	ISSUE : A	CONTINUATION	PAGE NO. 2
-------------------	-----------	--------------	------------

## **ELECTRICAL SPECIFICATION:**

RESISTANCE AT 25 °C :  $1.1k\Omega \pm 20\%$  (1) RESISTANCE, -20°C to +55°C :  $2.0k\Omega$  max. (1) SWITCHING TEMPERATURE :  $80 \pm 10$ °C (2)

MAXIMUM VOLTAGE ( $V_{MAX}$ ) : 1000Vrms

AMBIENT TEMPERATURE RANGE

at maximum voltage :  $-20 \text{ to } +60^{\circ}\text{C}$ storage :  $-25 \text{ to } +125^{\circ}\text{C}$ 

## NOTES:

(1) Measuring current: 1mA max.

- (2)  $Resistance = 2 \times Resistance minimum.$
- (3)  $V = V max. R_{series} = 1.0 k \Omega.$
- (4) Mounting for test: Device held in test clips, leadlength from disc head to clip: 10mm. Measurement made in still air,  $T_{amb} = 25 \, ^{\circ}$ C.