NOTES:

1. ASSEMBLY MARKED WITH MOLEX, MOLEX P/N, REV & DATE CODE IN YYWW FORMAT. SEE EXAMPLE 1.
2. ORIENTATION OF CONDUCTOR TO BE ± 5° MAX.

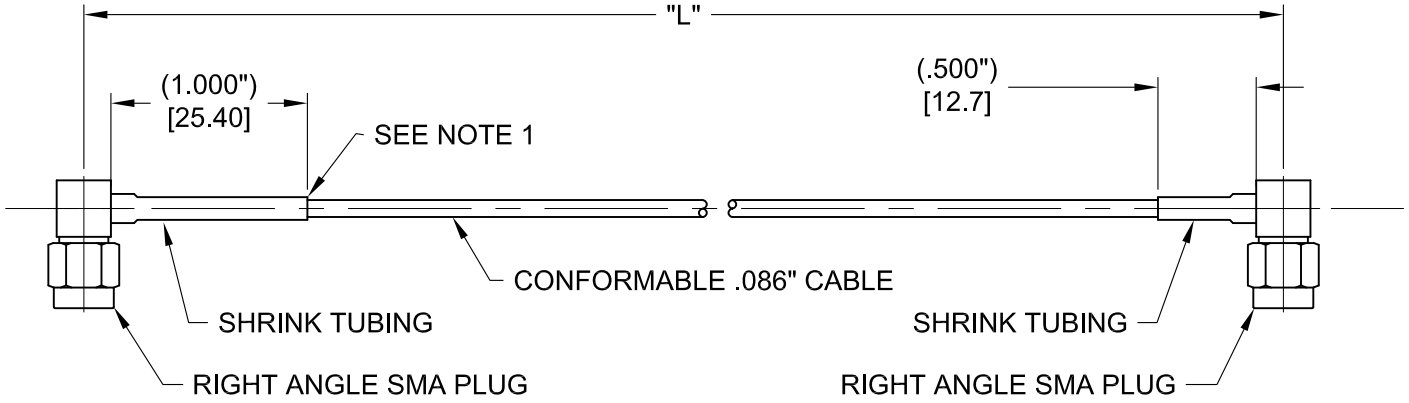

	2GHz		6GHz				
MOLEX P/N	VSWR MAX	IL MAX	VSWR MAX	IL MAX	FCT P/N	LENGTH	TOLERANCE
73230-9360	1.15	.330 dB	1.40	.520 dB	24P203C24P2-003	3.000"	±.150
73230-9361	1.15	.350 dB	1.40	.600 dB	24P203C24P2-006	6.000"	±.150
73230-9363	1.15	.450 dB	1.40	.700 dB	24P203C24P2-009	9.000"	±.150
73230-9362	1.15	.500 dB	1.40	.850 dB	24P203C24P2-012	12.000"	±.175
73230-9364	1.15	.650 dB	1.40	1.150 dB	24P203C24P2-018	18.000"	±.200

EXAMPLE 1:

MOLEX 73230-936X
REV. XX YYWW

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

QUALITY SYMBOLS: E = 0; E = 0; E = 0; ▼ = 0; C = 0; ☒ = 0; ■ = 0; ▽ = 0

RELEASED TO GENERAL MARKET UPDATE
EC NO: 659506
DRWN: JWB 03/29/2021
CHK'D: JED 03/31/2021
APPR: KJT 03/20/2021
REV: B

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	±
2 PLACES	±	±
1 PLACES	±	±
0 PLACES	±	±

ANGULAR TOL ± °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION UNITS: INCH [mm]
SCALE: NTS
DRWN BY: DP DATE: 03/17/08
CHK'D BY: KJT DATE: 10/14/08
APPR BY: JTC DATE: 10/14/08
DRAWING SIZE: A
THIRD ANGLE PROJECTION

molex

CABLE ASSEMBLY - SMA R/A PLUG TO SMA R/A PLUG ON .086 CONFORMABLE

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
73230	SEE TABLE	GENERAL MARKET

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
SD-73230-936	PSD	000	1 OF 1