

PIN NUMBER	DIM. L
25,26	3.50
ALL OTHER PINS	4.25
1, 13, 38, 50	5.00

NOTES :

- MATERIAL :
 INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING: UL94V-0
 COLOR: IVORY
 CONTACT : COPPER ALLOY
 GROUND MOUNTING EAR: COPPER ALLOY
- PLATING :
 CONTACT AREA: SELECTIVE GOLD (SEE P/N DESCRIPTION)
 UNDER PLATING: 50u" NICKEL OVERALL
 SOLDER TAIL AREA: 100u" TIN/LEAD DR 100u" MATTE TIN
 GROUND MOUNT EAR AREA: 100u" TIN/LEAD DR 100u" MATTE TIN
- SOLDERTAILS TO BE WITHIN 0.05 UPWARD
 AND 0.2 DOWNWARD FROM Z-DATUM PLACE,
 AND COPLANARITY OF SOLDER TAILS TO BE
 WITHIN 0.10mm.
- PRODUCT SPEC: GS-12-240.
- PACKAGING SPEC: GS-14-980.

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.




All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.30	projection	title	
A	T04-0429	A.C	12/16/04		.XX ± 0.20		CF HEADER TYPE II NORMAL	
B	T05-0256	A.C	11/09/05		.XXX ± 0.10	 MM	S/O=0.0MM	
C	T06-0172	A.C	10/09/06	angles	0° ±2°		product family CF	
D	T09-1097	S.LIN	07/09/09	dr	ALLEN CHANG 12/16/04	scale	size	
E	T09-1113	S.LIN	09/03/09	enr	ALLEN CHANG 12/16/04		dwg no	
F	T09-1144	S.LIN	11/27/09	chr	STERLING LIN 12/16/04	NA	A4	
				appd	H.C LIU 12/16/04		10044078	
sheet index	revision sheet	F 1	F 2					

6.Part Number Description:

P/N: 10044078-XX50XX




PLATING ON SOLDER TAIL AREA:
 BLANK: 100u" TIN/LEAD.
 LF: 100u" MATTE TIN.

BLANK: WITHOUT CAP+TRAY PACKING
 2: WITH CAP+TRAY PACKING
 3: WITH CAP+T&R PACKING

PIN COUNT.

KEY TYPE:
 0: NORMAL TYPE

GOLD PLATING:
 B: 10u" GOLD PLATE
 E: 30u" GOLD PLATE

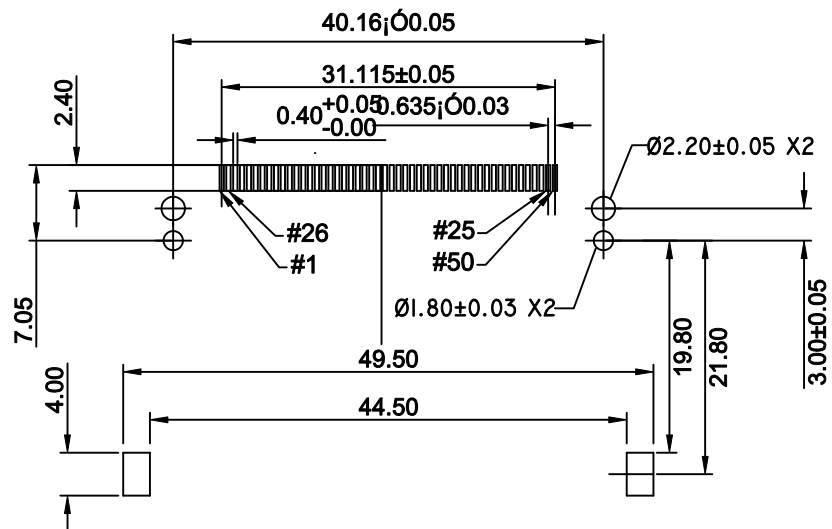

General Tolerance +/-0.05mm
Recommended PCB Pattern

- 7. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, IR OR VAPER PHASE REFLOW OVEN.
- 8. THIS PRODUCT (10053867-XXXXLF) MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBED IN GS-22-008.

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.30				projection	title	
F	-	-	-		.XX ± 0.20					CF HEADER TYPE II NORMAL	
					.XXX ± 0.10					S/O=0.0MM	
				angles	0° ± 2°				MM	product family CF	
				dr	ALLEN CHANG	12/16/04	scale			code	
				enr	ALLEN CHANG	12/16/04	NA			TWN	
				chr	STERLING LIN	12/16/04	A4		sheet		
				appd	H.C LIU	12/16/04	10044078		2 of 2		
sheet index	revision sheet										