

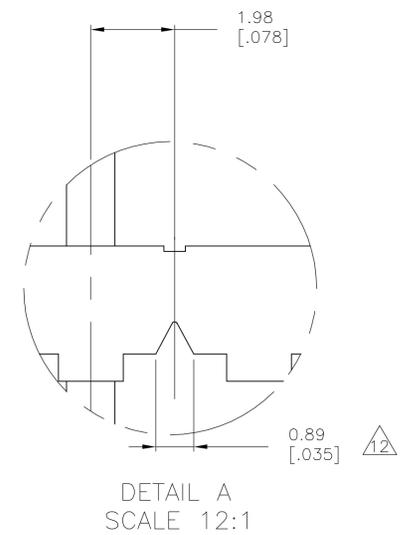
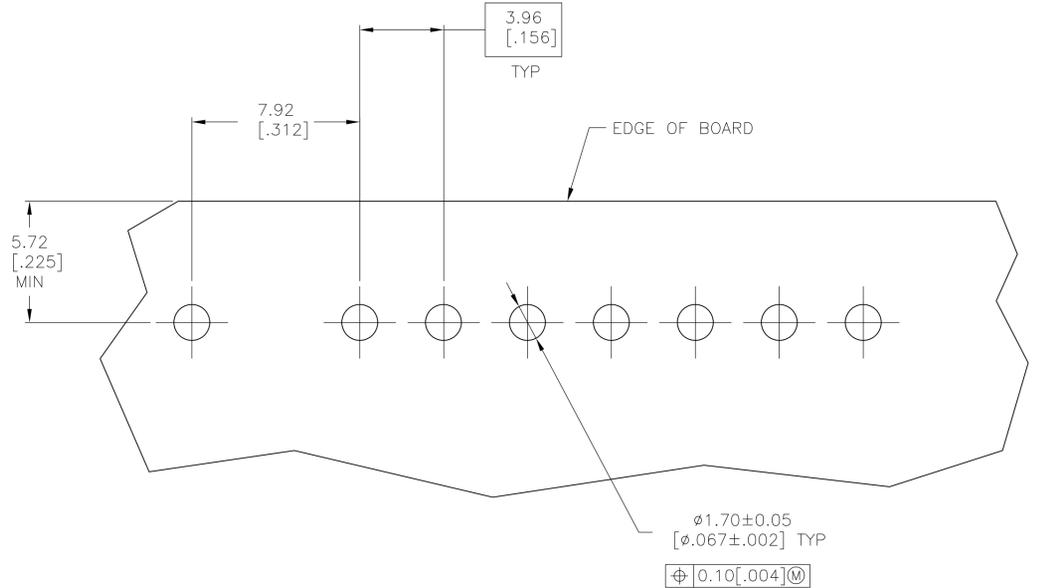
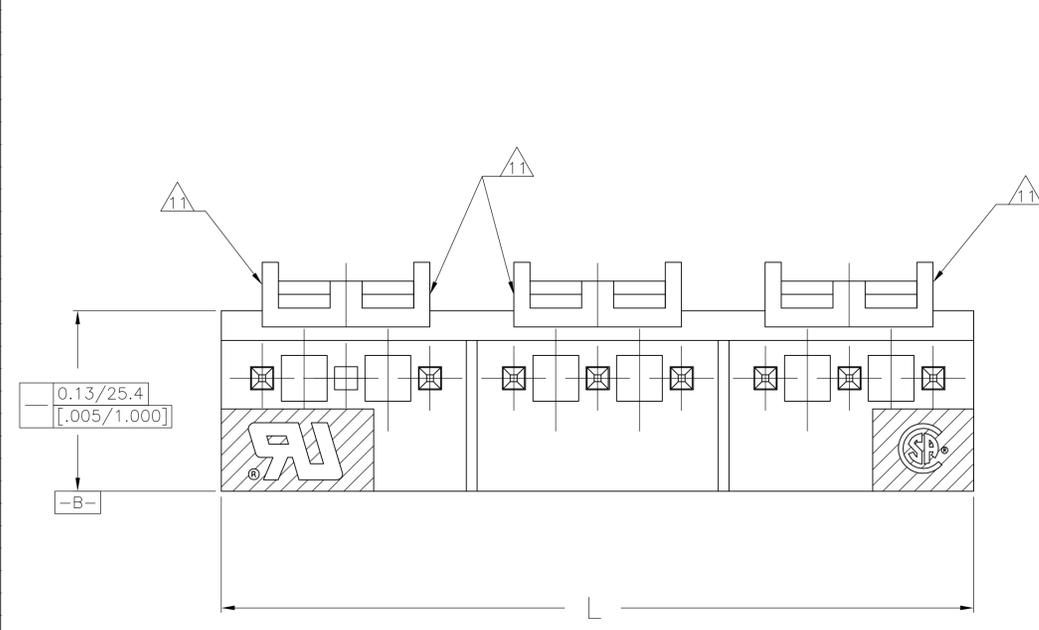


LOC		DIST		REVISIONS			
P	LR	DESCRIPTION	DATE	BY	APP'D		
0		EC 063B 110B 04	04OCT05	BSV	DB		

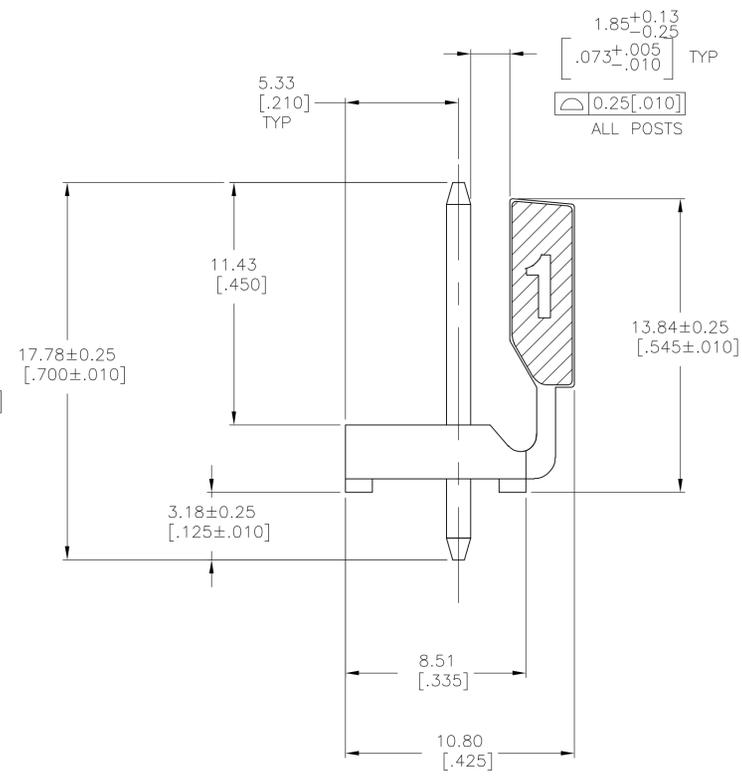

10 RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 [.062] THICK P.C. BOARD

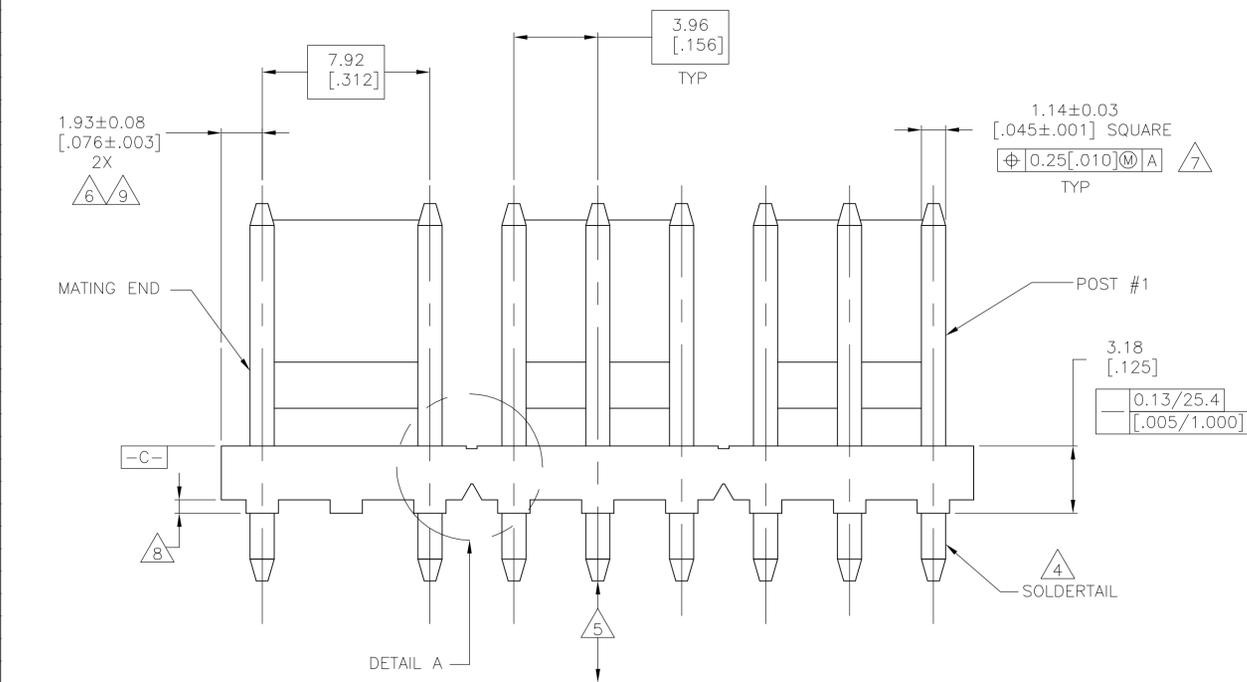

- 1 MATERIAL
HOUSING: THERMOPLASTIC POLYESTER, GLASS FILLED DR-48, UL94V-0.
POST: COPPER ALLOY
- 2 FINISH
HOUSING: BLACK
POST: MATTE TIN PLATE, 0.00380-0.00880 [.000150-.000350] THICK OVER NICKEL UNDERPLATE, 0.00130 [.000050] MINIMUM THICK.
- 3. THIS PART IS ROHS/ELV COMPLIANT.
- 4 POST SOLDERTAILS COMPLY WITH TYCO SOLDERABILITY SPECIFICATION 109-11-2.
- 5 POST WITHSTANDS 13.34 NEWTONS (3 LBS) MINIMUM AXIAL FORCE IN EITHER DIRECTION WITHOUT DISLODGING.
- 6 APPLIES AT -C-
- 7 APPLIES WHEN THE HEADER IS STRAIGHT.
- 8 PLASTIC PROJECTIONS PERMITTED IN THIS ZONE.
- 9 COORDINATE DIMENSIONS APPLIES FROM CENTER OF THE ACTUAL FEATURE.
- 10 SOLDER SIDE OF BOARD IS SHOWN.
- 11 EDGE OF POLARIZING LOCK WALL TO BE IN LINE WITH CENTERLINE OF ADJACENT POST WITHIN ±0.13 [.005].
- 12 NOTCH SHOWN MAY OR MAY NOT APPEAR.

METRIC

3&4	6&7	35.53 [1.399]	9	1744095-9
BACK WALL INTERRUPTIONS BETWEEN POSTS		L	NO. OF POSTIONS	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.				
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVED: D. ROSSI
0 PLC	± -	1 PLC	± -	NAME: MTA-156 HEADER ASSEMBLY, FRICTION LOCK, STRAIGHT .045 SQUARE POST, TIN PLATED, POLARIZED LOCK, OMITTED POST #8
2 PLC	± 0.13 [.005]	3 PLC	± -	APPLICATION SPEC
4 PLC	± -	ANGLES	± -	SIZE: A1
MATERIAL	FINISH	WEIGHT	CAGE CODE	DRAWING NO
1	2		00779	1744095
CUSTOMER DRAWING		SCALE: 6:1	SHEET: 1 of 1	REV: 0