

4


3

2

1


D

D

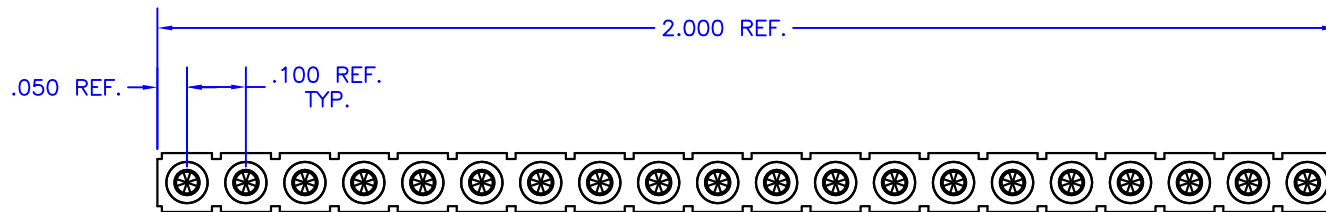


C

C

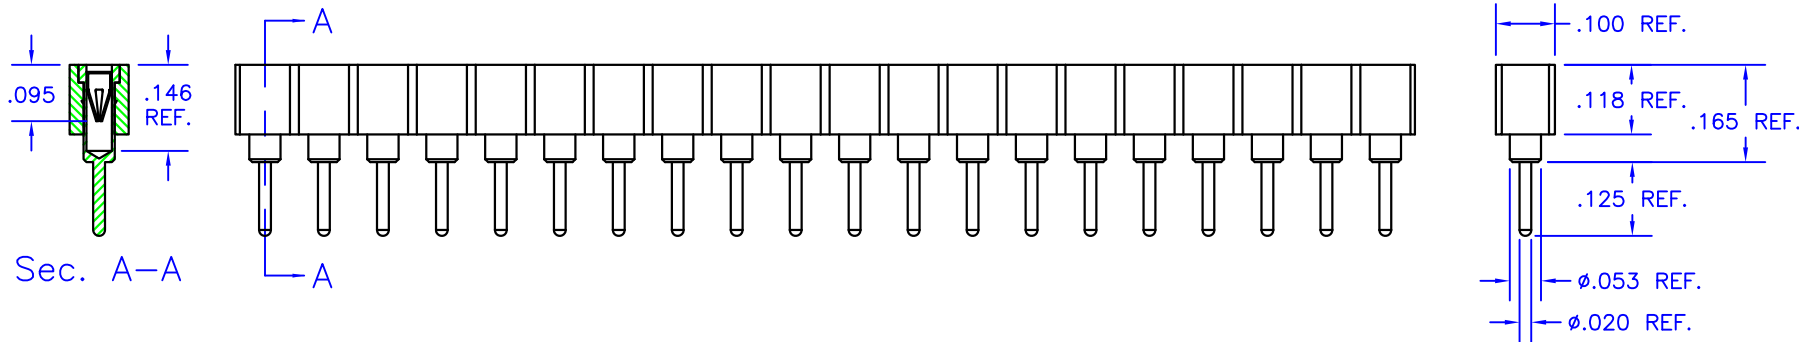

B

B

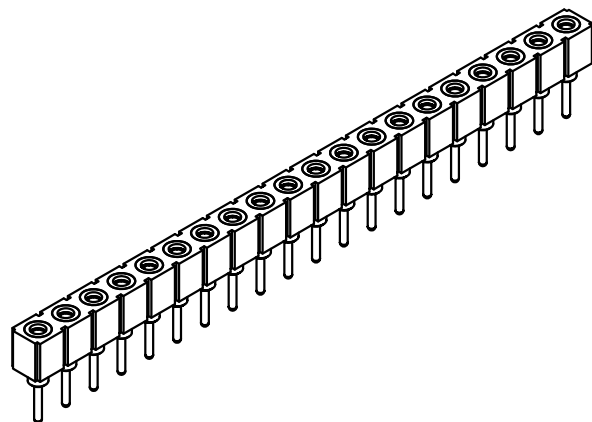


A

A

**NOTES:**

1. Unless otherwise noted, dimensions are in inches.
2. Shell: 360 brass, half-hard, with 200  $\mu$ m tin/lead over nickel
3. Contacts: Beryllium copper with 30  $\mu$ m gold over nickel
4. Body: Glass-filled black polyester, rated UL94V-0
5. Current rating: 3 amps, for 10°C temperature rise.
6. Solder mount in .028-.035 diameter hole.
7. Cut to length to suit application.
8. Mill-Max Part No. 310-93-120-41-001000

TOLERANCES - UNLESS OTHERWISE SPECIFIED .XX = ±.05 [.002] .XXX = ±.005 [.0002] ANG. = ±2°		TITLE: <b>MATING SOCKET</b> FOR .015-.025 DIAMETER PINS				MODEL:	
		SUBJECT: <b>MECHANICAL DRAWING</b>				<b>MS06</b>	
ENGINEER: <b>D-M</b>	DRAWN BY: <b>R.MOR</b>	DCAL: <b>13242</b>	SPL: <b>1</b>	OF: <b>1</b>	FILENAME: <b>MS06</b>	REV: <b>D</b>	DATE: <b>03JUN13</b>

4

3

2

1