


- Operating Temperature : -40°C to +85°C
- Storage Temperature : -40°C to +130°C
- Operating Frequency : 50 KHz and Up
- Lead-Free


Electrical Parameters @ 25° C

| Primary Inductance (μ H Min.) | Leakage Inductance (μ H Max.) | ET (V μ Sec. Max.) | Pri.-Sec. Insulation (Vdc) | DCR (Ω Max.) | |
|---------------------------------------|---------------------------------------|---------------------------|-------------------------------|-------------------------|------|
| | | | | Pri. | Sec. |
| 785 | 0.46 | 9.7 | 1500 | 0.60 | 0.60 |

Package

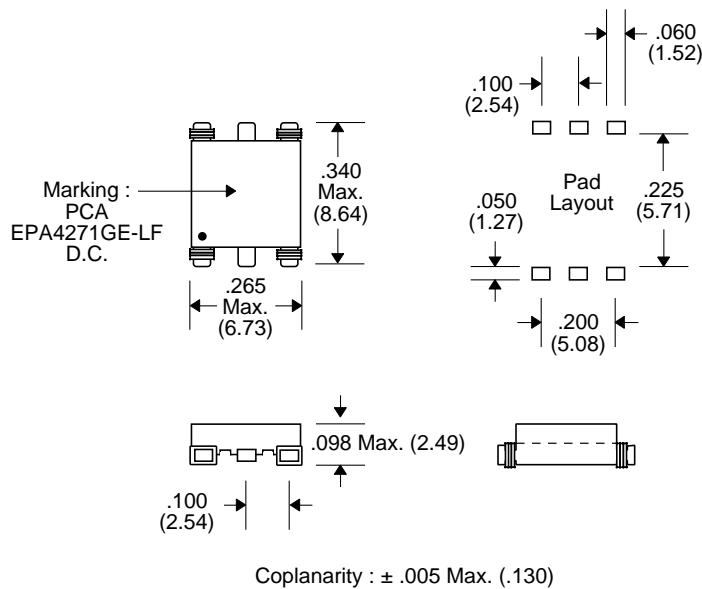

Schematic



| Notes : | EPA4271GE-LF |
|------------------------------|---|
| 1. Lead Finish | Hot Dipped Sn or SnCu |
| 2. Peak Temperature Rating | 250°C |
| 3. Moisture Sensitive Levels | MSL = 1 (Unlimited, \leq 30°C/60%RH) |
| 4. Weight | 0.28 grams |
| 5. Packaging Information | (Tube) 60 pieces/tube |
| | (Tape & Reel) 1500 pieces/13" reel |

Unless Otherwise Specified Dimensions are in Inches /mm \pm .010 / .25