

REV. 0


DCO 141864

COIL: @ 25°C	
RESISTANCE	210 OHMS ±10%
NOMINAL VOLTAGE	8.0-16.0 VDC
MUST OPERATE	5.4 VDC
MUST RELEASE	3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	100 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE 4 MS MAX.
	RELEASE 6 MS MAX.
	BOUNCE 1.5 MS MAX.
	DIELECTRIC 500 VAC - ALL POINTS

CUSTOMER DATA SHEET

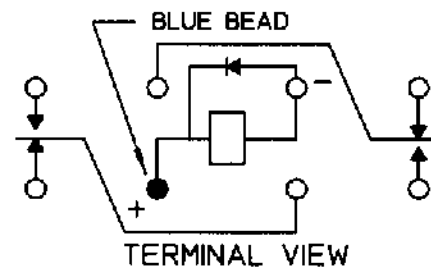

CONTACT RATING:	2A 28VDC RES.
	0.5A 28VDC IND. L/R .008 MAX., 0.5A
	115VAC CASE UNGROUNDED, .125A 115VAC
	CASE GROUNDED RES. 100,000 OPS

DR. B.D. 3/15/00 CK. 3/15/00

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.I. STD.	
CUST. NO. REV.	

'3SBC' RELAY

3SBC5004E5