


REV. 1  
DCO 102710

.050 ± .002  
DIA. PINS  
GOLD PLATED

COIL: @ 25°C	
RESISTANCE	58-83 OHMS
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.5 VDC
MUST RELEASE	3.6 VDC MAX, 0.8 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE & RELEASE 15 MS MAX.
	OPERATE BOUNCE 5 MS MAX.
	RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

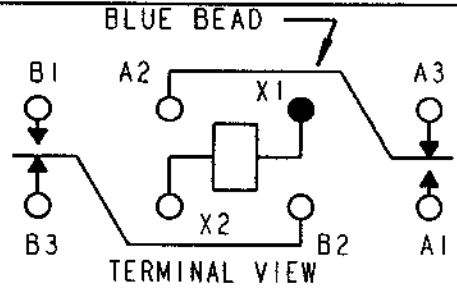

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 H <sub>2</sub> RESISTIVE
	50,000 OPERATIONS

DR. RB 3/9/98 CK. TLG 8-17-01

**CII Technologies**  
advanced control electronic solutions

CUST. QPL	"07" RELAY
CUST. NO. M5757/23-009	REV. _____

B07D934BB2-0119