

NOTES: I. MATERIALS AND FINISHES: OUTER CONDUCTOR - BRASS, CHEMISTRY NICKEL PLATING (.00005 IN THICK) O-RING - SILICONE RUBBER 2. ENVIRONMENTAL: THIRD ANGLE PROJ. THIRD ANGLE PROJ

- A. CAP MEETS IP-67 STANDARD IN MATED CONDITION.
- 3. PACKAGING:
  - A. QUANTITY: SINGLE PACK
  - B. MARKING: BAG TO BE MARKED
  - "AMPHENOL, 431-10000, AND DATE CODE"

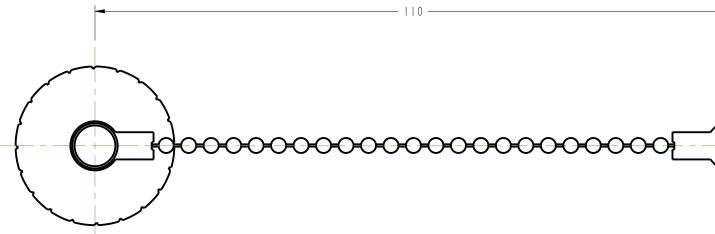

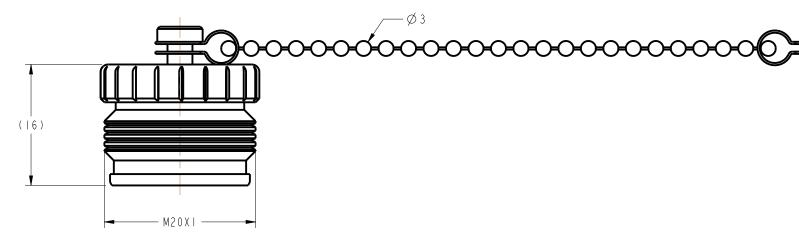

CUSTOME ALL OTHER S

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES $\pm 0.05mm \pm 0.1mm \pm 0.2mm \pm 0.3mm \pm 1^{\circ}$ NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to anyonary way be related to	MATERIAL	DRAWN K. ELMES ENGINEER K. ELMES	DATE 21-Sep-16 DATE 21-Sep-16	TITLE 4.3/10 CAP FOR MALE CONN		
	REFERENCE EAR# 7408 CONFIGURATION LEVEL: In Work	APPROVED K. CAPOZZI CAD FILE	DATE   /4/ 6	SCALE: 1.0:1.0 SHEET 2 C DWG SIZE	) F	
or disclosed by said drawings, specifications, or other data.	FINISH	<u>]</u>		В		

R E	VISIONS	5	DATE	ECO	APPR
TO MFG.			11/4/16	02343	KCE
-					
	Ø3.	4			
$\rightarrow$					
(-)					
$\checkmark$					
				VING	)
R OI HEETS A		NTERNAL	USE ONLY		)
R OI Heets A		NTERNAL			•
		Amp	USE ONLY	RF	•
CTOR		Amp www.a	henol	RF	•
	DRAWIN	Amp www.a	. USE ONLY h ∈ n ⊙   mphenolrf. 31-10000 10000	RF	•