

T	G	П	m	O



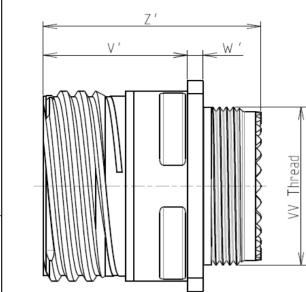

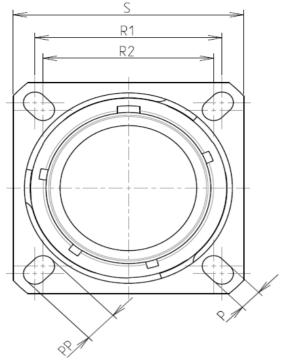

CHARACTERISTICS

4

ω

 \sim

_

ב ס	т п		0	Φ	A		
	S R1 R2 V V V V V V V V V V V V V V V V V V			WN AS EXAMPLE			4
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal P 3.25±0.2						
-Shell Material: Composite-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)					
 -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum -Durability : 500 Mating cycles 	V' 19.5+1.4/-0 W' 2.1/3.65 Z' 32 Max VV THREAD M18x1-6g		[tion & Control List Not Listed		2
-Delivered with Souriau contacts and Accessories -Temperature Range <u>-</u> -65°C to +200°C			PN: 8D	013M08JE			_
-Salt Spray : 2000 hours		ISS DATE	5 First Release Latest modification - by			MOD N°	
		Designed By: TITLE	Date:	posite Receptacle	CUSTOMER DRAWING 8D series		-
BASIC SERIES: 8D 0 - 13 M 0 SHELL TYPE : Square Flange Receptacle	8 J E	SCALE	General Tolerat ±	nces:	NPRDS / PROJECT 859		-
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	ORIENTATI CONTACT TYPE : SOCKET (1500 Ma				This document is the prop SOURIAU it must not be reproduce communicated without per	ed or	
PLATING : M = Nickel	CONTACT LAYOUT :	13-08 FORMAT A3		RIAU DRG N° 13M08JE-C		SHEET 1/2	_
H G	F E	D	C I	В	A		L

		۵	ات	m		0
		Contact Layout				Panel Cutout
4		$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & $			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Com posi II A E CC C C C E F G G H	Jon X-axis (mm) Y-axis (mm) 4 +.065 (1.65) +.157 (3.99) 8 +.170 (4.32) +.000 (0.00) > +.120 (3.05) 120 (3.05) > 170 (4.32) +.000 (0.00) E 120 (3.05) 120 (3.05) 170 (4.32) +.000 (0.00) S 065 (1.65) +.157 (3.99)			~ ~	
ယ		mber of Size Service Contact Supersedes ntacts contacts rating location 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
23						Country FR PN: 8D013N
					A 15-10-20 ISS DATE Designed By:	16 First Release
_					TITLE SCALE NA	General linear Tolerances:
					SOURIA	
					FORMAT A3	SOURIAU 8D013M
	Н	G	F	E	D	C

