

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JAN , 2006.

© COPYRIGHT 2006 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D		ECO-15-004340	30APR2015	RZ	MC

NOTES:

- 1 SINGLE PACKING: ONE CONNECTOR PER LABELED BAG PACKAGED. LABELED PER TEC-107-115
- 2 TRAY PACKAGED
- 3 Ag PLATING
- 4 THIS ITEM MUST BE WHITE

5 ELECTRICAL CHARACTERISTICS



FREQUENCY RANGE: DC - 500 MHz
 NOMINAL IMPEDANCE: Non Constant
 INSULATION RESISTANCE: 5000 MOhm
 WORKING VOLTAGE: 500 Volts RMS at Sea Level
 DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
 CONTACT RESISTANCE:
 CENTER CONTACT: 3.00 mOhm Max
 OUTER CONTACT: 2.00 mOhm Max

6 MECHANICAL CHARACTERISTICS

COUPLING NUT RETENTION FORCE: 445N Min
 CLAMP NUT RECOMMENDED TORQUE: 4 Nm
 CABLE RETENTION FORCE: 128N Min
 DURABILITY: 500 Cycles Min

7 ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE: -65 to +165 DegC

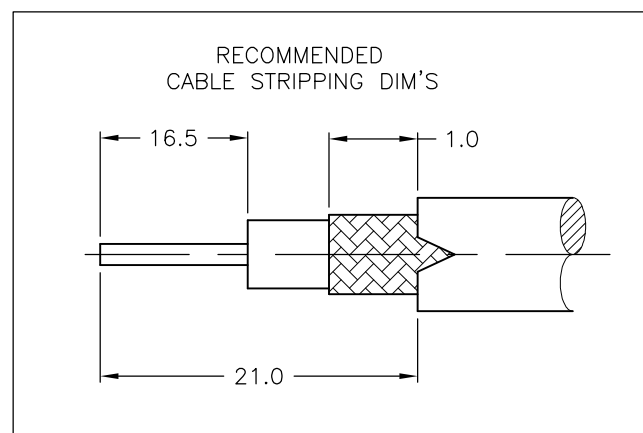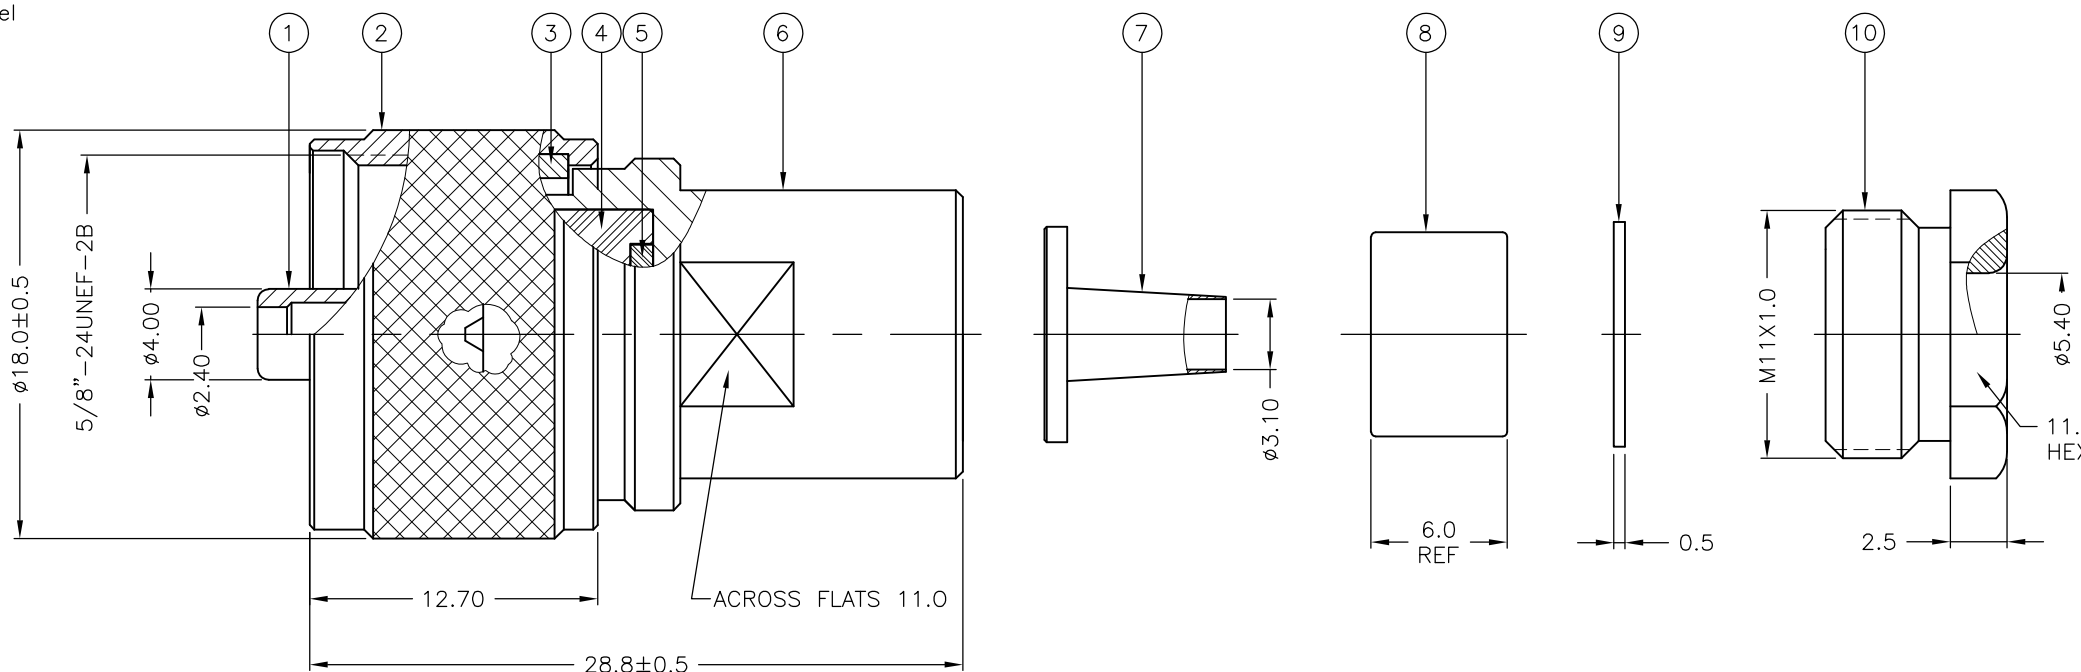

QTY	QTY PER ASSY	QTY PER ASSY	MATERIAL	DESCRIPTION	ITEM
1	1		BRASS	CLAMP NUT	10
1	1		BRASS	WASHER	9
1	1		SILICON RUBBER	GASKET	8
1	1		BRASS	FERRULE	7
1	1		BRASS	BODY	6
1	1		PTFE	INSULATION	5
1	1		PTFE	INSULATION	4
1	1		PHOSPHOR BRONZE	CIRCLIP	3
1	1		BRASS	COUPLING NUT	2
1	1		BRASS	CONTACT	1
6--0	1--0		MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J.SANDWELL	09JAN06	STE TE Connectivity
		CHK	S.PARLOW	09JAN06	
		APVD	F.WHEELER-KING	09JAN06	
		PRODUCT SPEC			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	± -	UHF STRAIGHT PLUG SOLDER RG58C/U, 141A/U, URM43, 76, KX15	
		1 PLC	± 0.2		
		2 PLC	± 0.1		
		3 PLC	± -		
		4 PLC	± -		
MATERIAL		FINISH	± -	SIZE	
SEE TABLE				CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
				A3 00779 C-1337473	
				SCALE	
				NTS	
				SHEET	
				1 OF 1	
				REV	
				D	
CUSTOMER DRAWING					