
1-1744439-0 - ACTIVE

Economy Power 2.5

TE Internal #: 1-1744439-0 PCB Mount Header, Vertical, Wire-to-Board, 10 Position, 2.5 mm [. 098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Economy Power 2.5

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

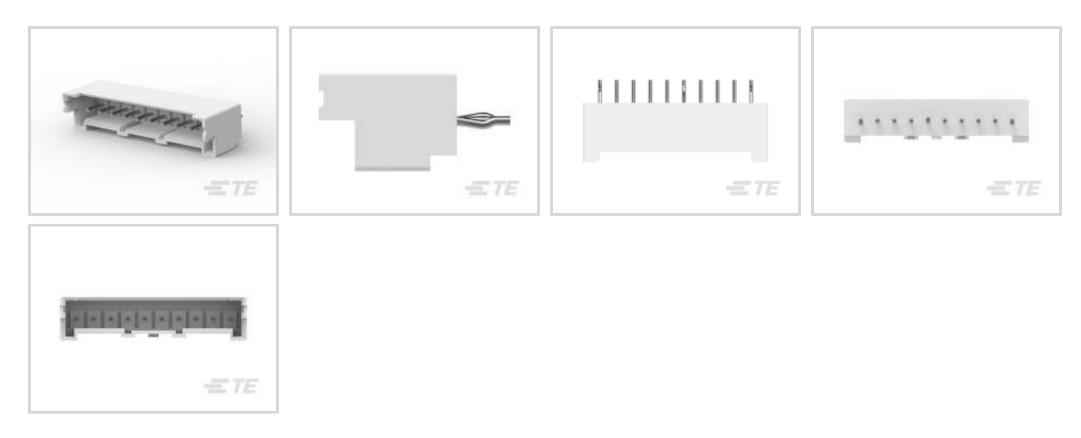

Connector System: Wire-to-Board

Number of Positions: 10

Number of Rows: 1

Centerline (Pitch): 2.5 mm [.098 in]

PCB Mount Orientation: Vertical

Features

Connectivity

Product Type Features

Connector System	Wire-to-Board			
Header Type	Fully Shrouded			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
PCB Connector Assembly Type	PCB Mount Header			
Configuration Features				
Number of Positions	10			
Number of Rows	1			
PCB Mount Orientation	Vertical			
Electrical Characteristics				
Operating Voltage	250 VAC			
Body Features				
Primary Product Color	White			

PCB Mount Header, Vertical, Wire-to-Board, 10 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Economy Power 2.5



Contact Features

PCB Contact Termination Area Plating Material Thickness	2.032 µm[80 µin]
Contact Layout	Inline
Mating Pin Diameter	.6 mm[.024 in]
Contact Mating Area Plating Material Thickness	2 – 5 μm[80 – 200 μin]
PCB Contact Termination Area Plating Material Finish	Bright
Contact Mating Area Plating Material Finish	Bright
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	4.2 A
Termination Features	
Round Termination Post & Tail Diameter	.6 mm[.024 in]
Termination Post & Tail Length	3.4 mm[.133 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	

Mechanical Attachment

Mating Alignment Type	Polarization			
Mating Retention	With			
Panel Mount Feature	Without			
Mating Retention Type	Latch			
Connector Mounting Type	Board Mount			
Mating Alignment	With			
PCB Mount Alignment	Without			
PCB Mount Retention	With			
Housing Features				
Housing Material	Nylon			
Centerline (Pitch)	2.5 mm[.098 in]			
Dimensions				
Connector Length	27.3 mm[1.075 in]			
Connector Height	8 mm[.315 in]			
Connector Width	9.58 mm[.377 in]			

PCB Mount Header, Vertical, Wire-to-Board, 10 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Economy Power 2.5



Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]					
Operation/Application						
Circuit Application	Power & Signal					
Industry Standards						
Glow Wire Rating	Glow Wire					
UL Flammability Rating	UL 94V-0					
Packaging Features						
Packaging Quantity	500					
Packaging Type	Bag					
Product Compliance For compliance documentation, visit the product page on TE.com>						
EU RoHS Directive 2011/65/EU	Compliant					
EU ELV Directive 2000/53/EC	Compliant					
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold					
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)					

(233)

Candidate List Declared Against: JAN 2023 (233)

Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Halogen Content

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

PCB Mount Header, Vertical, Wire-to-Board, 10 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Economy Power 2.5









Also in the Series | Economy Power 2.5



Insertion & Extraction To




PCB Headers & Recentacles(494)





Rectangular Power Connectors(43)

Insertion & Extraction Tools(1)	PCB Headers & Receptacles(494)	PCB Latches, Locks & Retainers(49)	Rectangular Power Connectors(43)

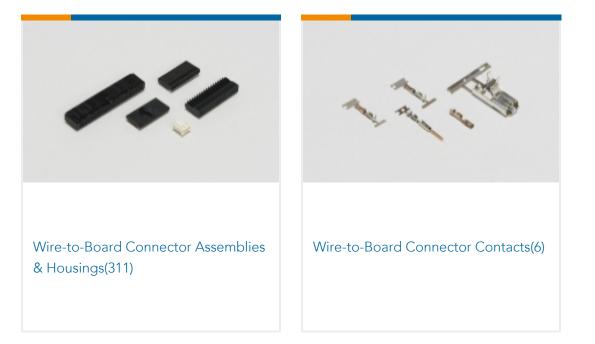

Customers Also Bought



PCB Mount Header, Vertical, Wire-to-Board, 10 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Economy Power 2.5





Documents

Product Drawings EP2.5 Shrd HDR ASSY 10P VERT, GW

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1744439-0_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1744439-0_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1744439-0_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 7-1773458-5_ECONOMY_POWER_QRG

English

7-1773461-6_EP2.5_Connector_Series

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English