
т	۵	н т	m	0





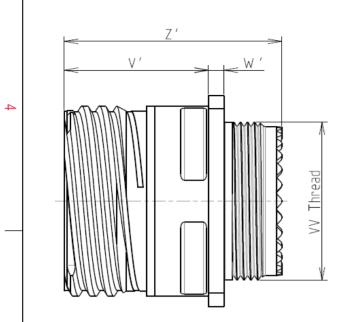

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65℃ to +175℃			

: 2000 hours

8D 0

G

11

J

02

J

F

D


Dim	Nominal
P	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M15x1-6g


ORIENTATION : D

CONTACT LAYOUT : 11-02

CONTACT TYPE : SOCKET (1500 Matings)

Е



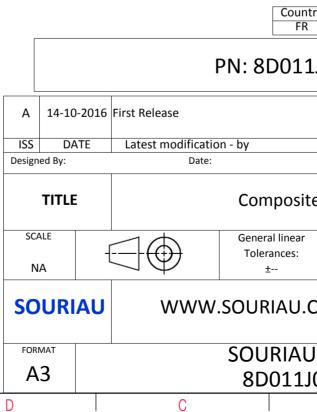

σ		Þ			
			4		
S EXAMPLE]	3		
any non-conforming which does not co or of the Parties or h adation, technical n	mply with by a third party otice.)				
untry Jurisc FR	Jurisdiction & Control List Not Listed				
L1J02JD					
	CUSTOMER D		OD N°		
site Receptacl	e Receptacle 8D series				
ar	NPRDS / PR 859	OJECT	1		
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N°	1	S	HEET		
LJO2JD-C B		A	1/2		
U	I	<i>•</i>			

ſ	Ŧ	െ	г п	m	D	0	
		Contact Layout				Pane	el Cutou
4	 .0 (2.	+Y B A +Y +X +X 95 4(mm) (2.4)mm)			~ -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Size no. 11 -2	tion X-axis Y-axis (mm) (mm) +.095 (2.41) +.000 (.00)			<u>v</u>	Dim	-
ω						ØA ØAA R1 ØT	
	+					SOURIAU shall not be liable due to a use of the Prod the Specifications issued by e (professional recom	ucts wh either of
N						PN: 8D	Countr FR 011
					ISS DATE Designed By:	16 First Release Latest modification - by Date:	
_					SCALE NA	Comp General Toleran ±	linear nces:
					FORMAT	SOUR	RIAU
	Н	G	F	E	A3 D	8D0)11J(

