

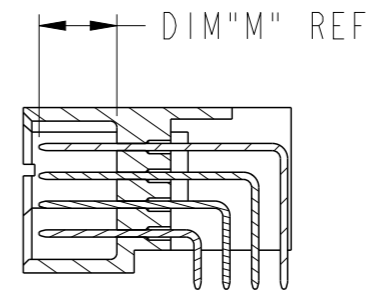
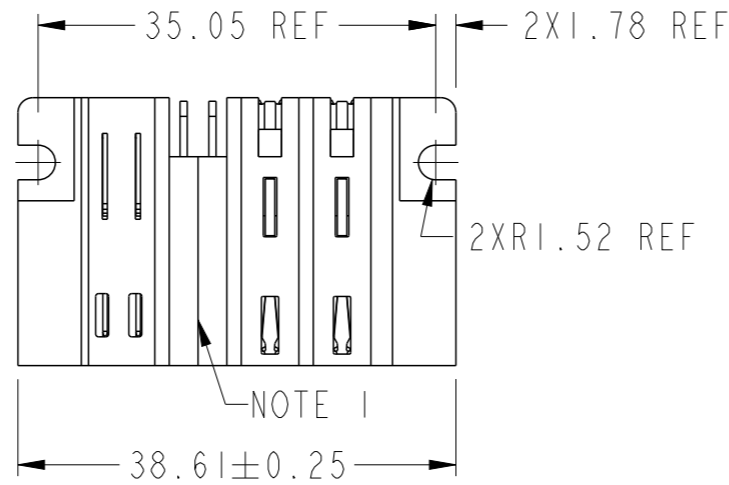
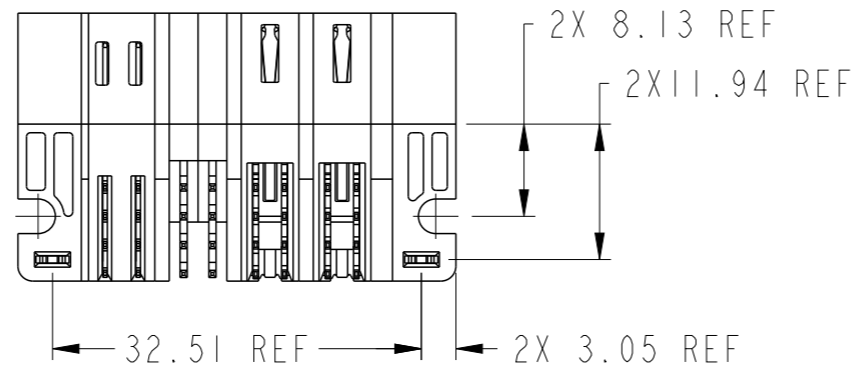


PART NUMBER 10106124-2202001LF

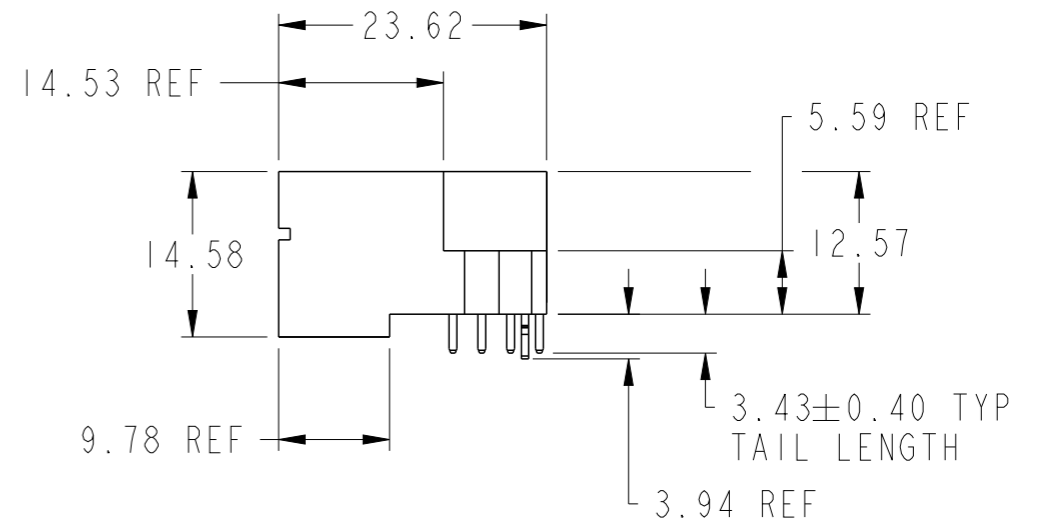


SECTION W-W

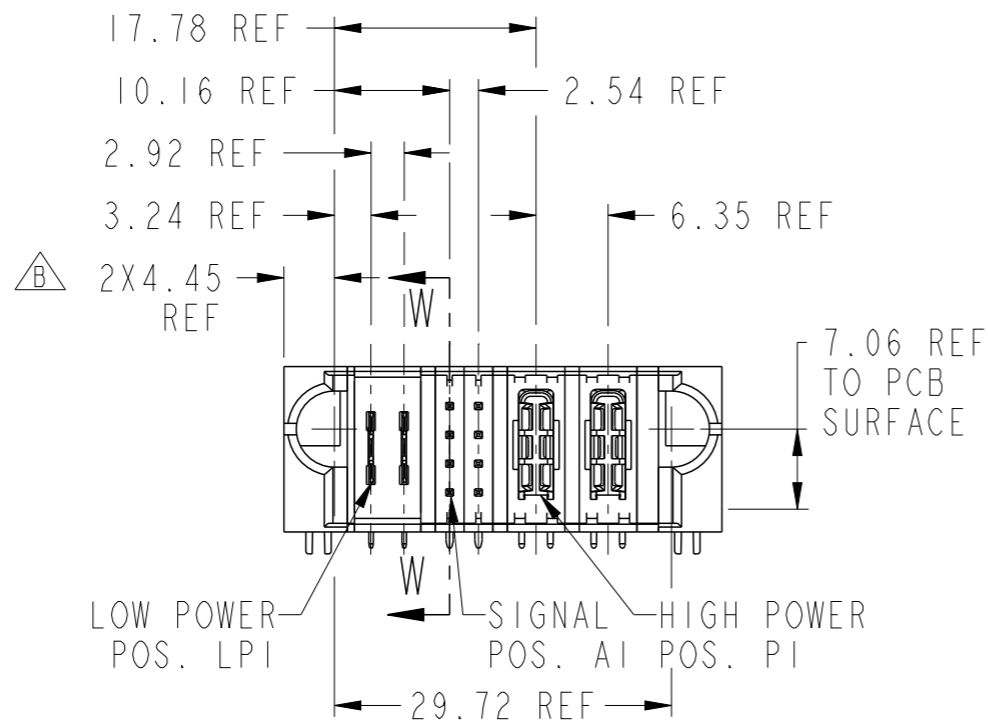

spec ref	*	dr	Peng-Bing Fu	2012/02/28	projection	MM	size	A3	scale	3:2														
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	2012/11/14			ecn no	ELX-DG-013143-1	rel level	Released														
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Shao-Qi Kuang	2012/11/15							product family	PwrBlade+												
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.5</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.5		0.XX	±0.25		0.XXX	±0.10	angular	0°	±2°	appr	Pei-Ming Zheng	2012/11/15			title	2LP + 8S + 2HP RA STB HEADER	dwg no	10106124-2202001	rev	B
linear	0.X	±0.5																						
	0.XX	±0.25																						
	0.XXX	±0.10																						
angular	0°	±2°																						
ASME Y14.5		www.fci.com			cat. no.	Product - Customer Drw			sheet 1 of 3															

PRODUCT NO.	ROWS	LP		S		HP		E2
		E1	LP1	LP2	1	2	P1	
10106124-2202001LF	DCBA	LKLK		ULH TIG SSS RRL		H1 H1		

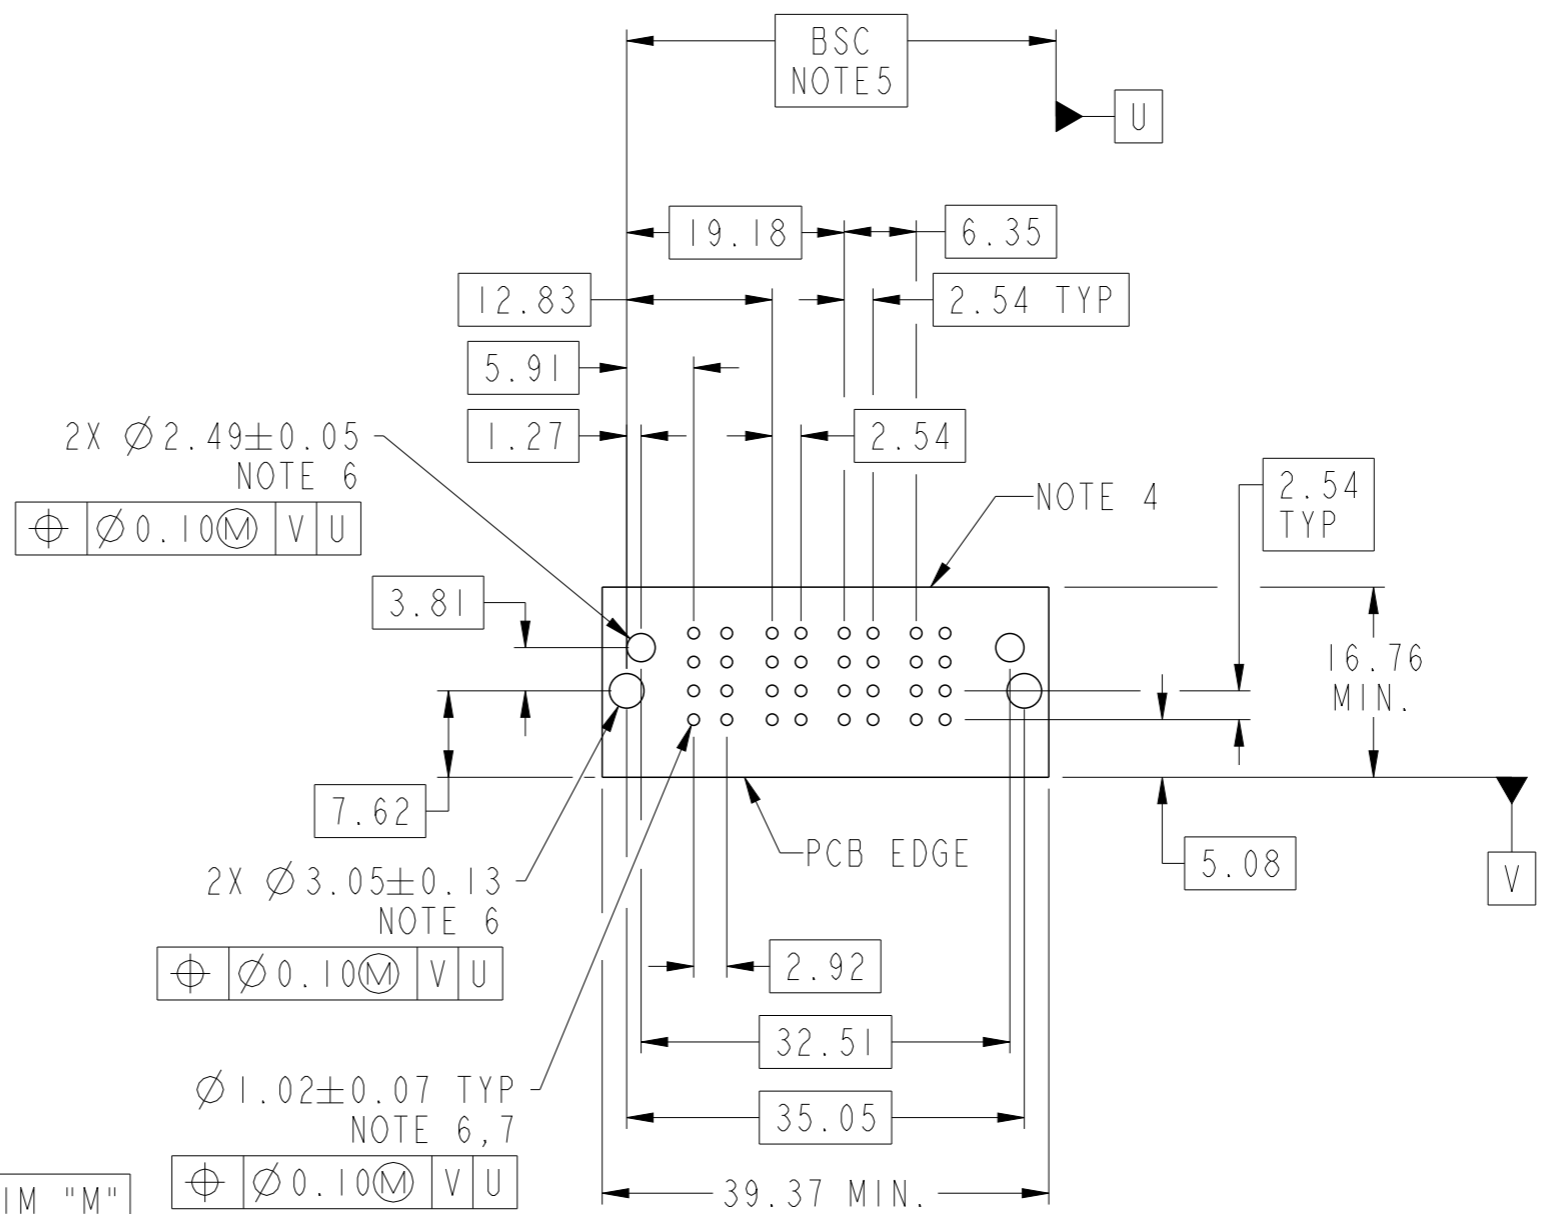

CODE	DESCRIPTION	DIM "M"
G	LMFB SIGNAL CONTACT, ROW C (3.43)	5.59
H	LMFB SIGNAL CONTACT, ROW D (3.43)	5.59
HI	STD HIGH POWER CONTACT (3.43)	N/A
HA	METAL HOLD DOWN	N/A
LK	STD LOW POWER CONTACT (3.43)	N/A
R	STD SIGNAL CONTACT, ROW A (3.43)	6.86
RL	FMLB SIGNAL CONTACT, ROW A (3.43)	7.82
S	STD SIGNAL CONTACT, ROW B (3.43)	6.86
T	STD SIGNAL CONTACT, ROW C (3.43)	6.86
UL	FMLB SIGNAL CONTACT, ROW D (3.43)	7.82

dr	Peng-Bing Fu	2012/02/28	projection	MM	size	A3	scale	3:2
eng	Peng-Bing Fu	2012/11/14			ecn no ELX-DG-013143-1			
chr	Shao-Qi Kuang	2012/11/15			product family PwrBlade+		rel level Released	
appr	Pei-Ming Zheng	2012/11/15			2LP + 8S + 2HP RA STB HEADER		dwg no 10106124-2202001	rev B
www.fci.com			cat. no.		Product - Customer Drw			sheet 2 of 3

Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7)  $1.15 \pm 0.025$ MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A  $1.02 \pm 0.07$ MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.  
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.  
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- $\triangle B$  9) A  $\triangle B$  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION



Copyright FCI.

dr	Peng-Bing Fu	2012/02/28	projection 	MM 	size	A3	scale	3:2
eng	Peng-Bing Fu	2012/11/14			ecn no	ELX-DG-013143-1		
chr	Shao-Qi Kuang	2012/11/15			product family	PwrBlade+	rel level	Released
appr	Pei-Ming Zheng	2012/11/15			title	2LP + 8S + 2HP		rev
					RA STB HEADER	dwg no	10106124-2202001	
www.fci.com			cat. no.	Product - Customer Drw			sheet 3 of 3	