


LOC	DIST	REV	REVISION RECORD	DATE	DWN	APVD
GP	00	A	REVISED PER ECO-07-022535	16-Nov-07	JDP	CWR

- 1 MATERIAL: COPPER-NICKEL ALLOY
- 2 FINISH: .000050 MIN GOLD OVER .00050 MIN NICKEL IN MATING AREA
- 3 FINISH: .000100 MIN BRIGHT TIN-LEAD OVER .000050 MIN NICKEL IN MATING AREA

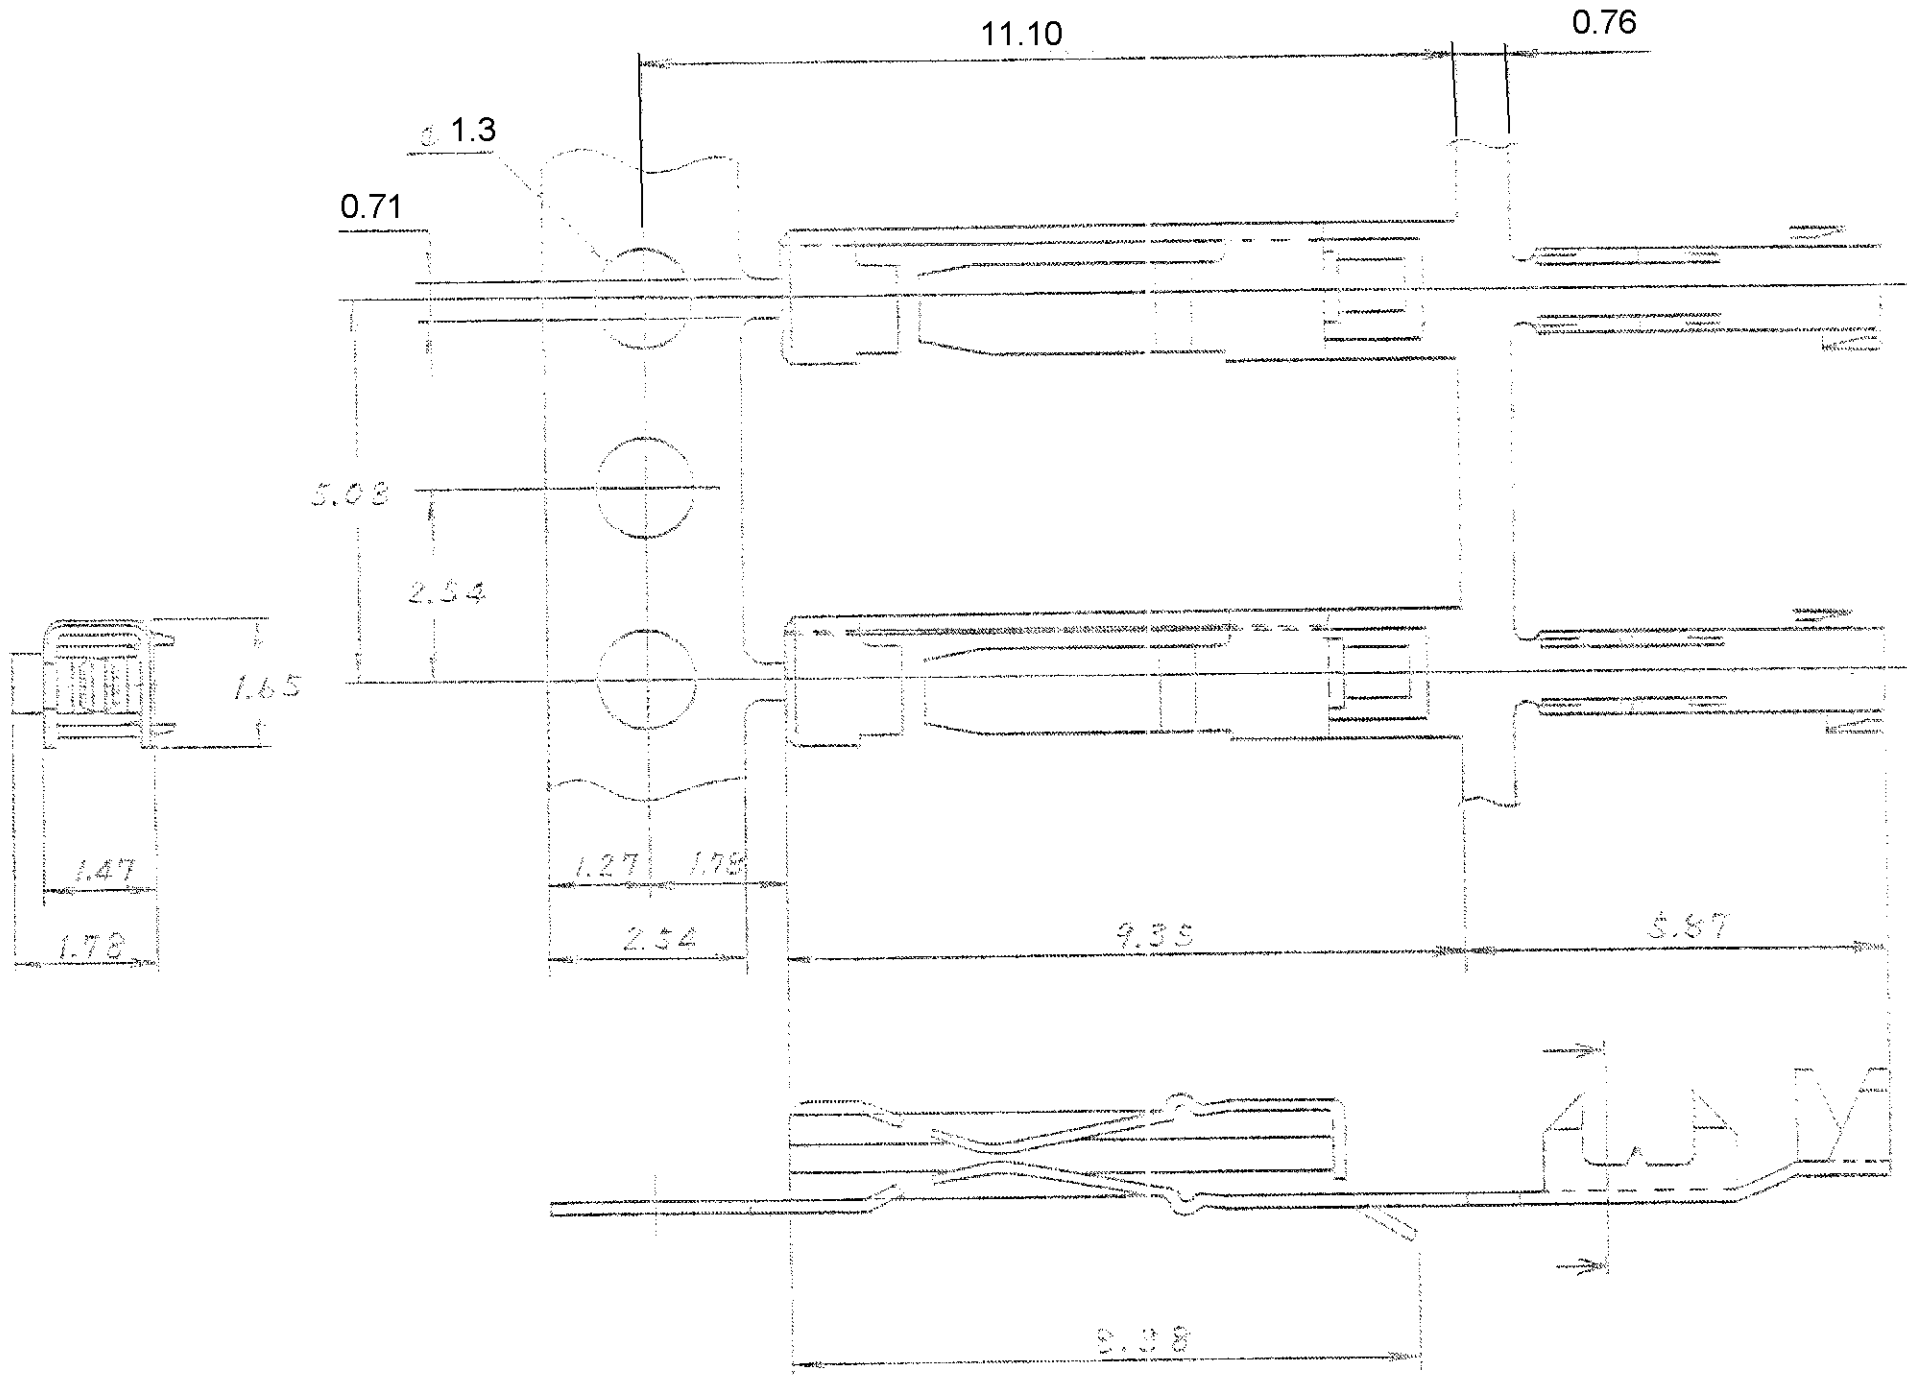

PHYSICAL PROPERTIES	
CONTACT RETENTION FORCE:	44 N
INSERTION FORCE:	1.4 N PER CONTACT
EXTRACTION FORCE:	1 N PER CONTACT
ELECTRICAL PROPERTIES	
CURRENT RATING:	3 AMPS PER PIN
ENVIRONMENTAL PROPERTIES	
TEMPERATURE RATING:	-40°C TO +105°C

3	FP-2T	1437249-8
2	FP-2G	1437249-7
FINISH	T&B CATALOG P/N (REF)	T.E. P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN (K.TAMURA) 2NOV00	AMP Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	NAME フレックス バック システム ソケット コンタクト FLEX PACK SYSTEM SOCKET CONTACT	
	0 PLC ± -	APVD	PRODUCT SPEC	SIZE A3
	1 PLC ± -		APPLICATION SPEC	CAGE CODE 00779
	2 PLC ± -		DRAWING NO C-1437249-7	
	3 PLC ± -		RESTRICTED TO	
4 PLC ± -	SCALE 1:1			
ANGLES ± -	FINISH	WEIGHT	SHEET 1 OF 1	REV A
MATERIAL 2		CUSTOMER DRAWING		