PRODUCT DATASHEET C17410_SPORT-2X2-FT6

SPORT-2X2-FT6

Narrow forward throw beam with optimized cut-off for high masts

SPECIFICATION:

Dimensions 50.0 x 50.0 mm Height 11 mm Fastening screw yes 🕕 **ROHS** compliant



MATERIALS:

Component **Type** Material Colour **Finish** SPORT-2X2-FT6 Multi-lens **PMMA** clear


ORDERING INFORMATION:

Component Qty in box MOQ MPQ Box weight (kg) 8.8

C17410_SPORT-2X2-FT6 640 128 128 » Box size: 480 x 280 x 300 mm




PRODUCT DATASHEET C17410_SPORT-2X2-FT6

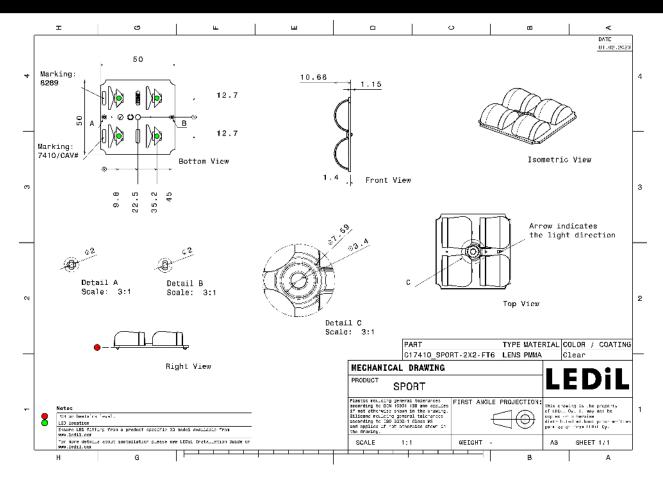


See also our general installation guide: www.ledil.com/installation_guide




OPTICAL RESULTS (MEASURED):

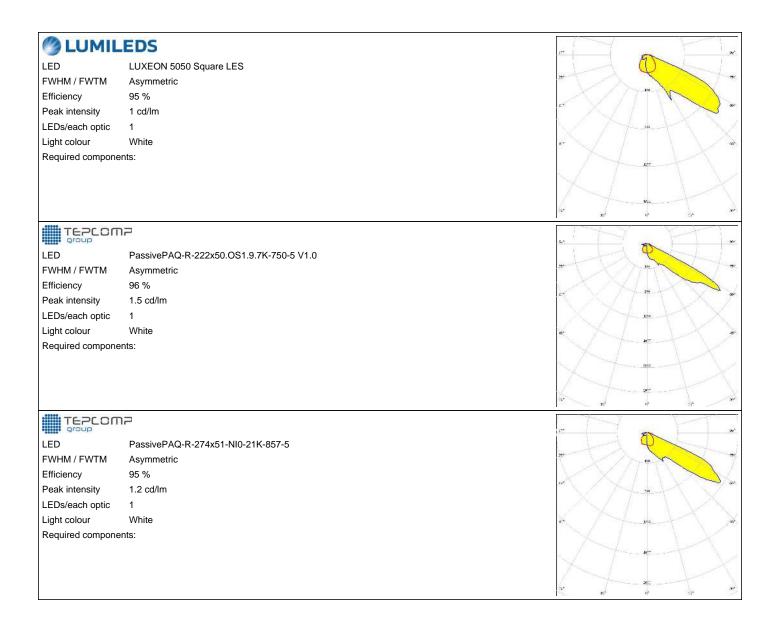




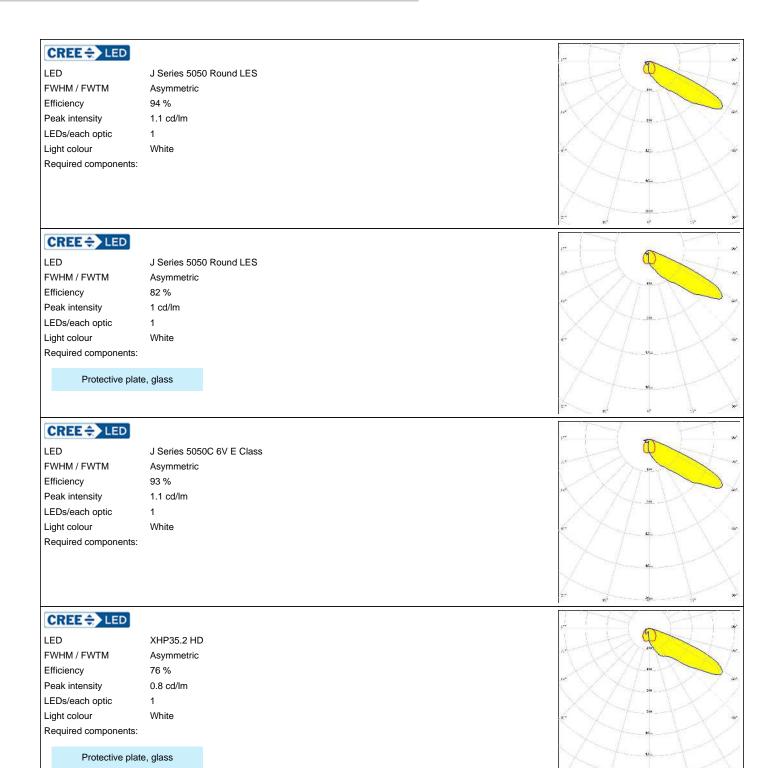




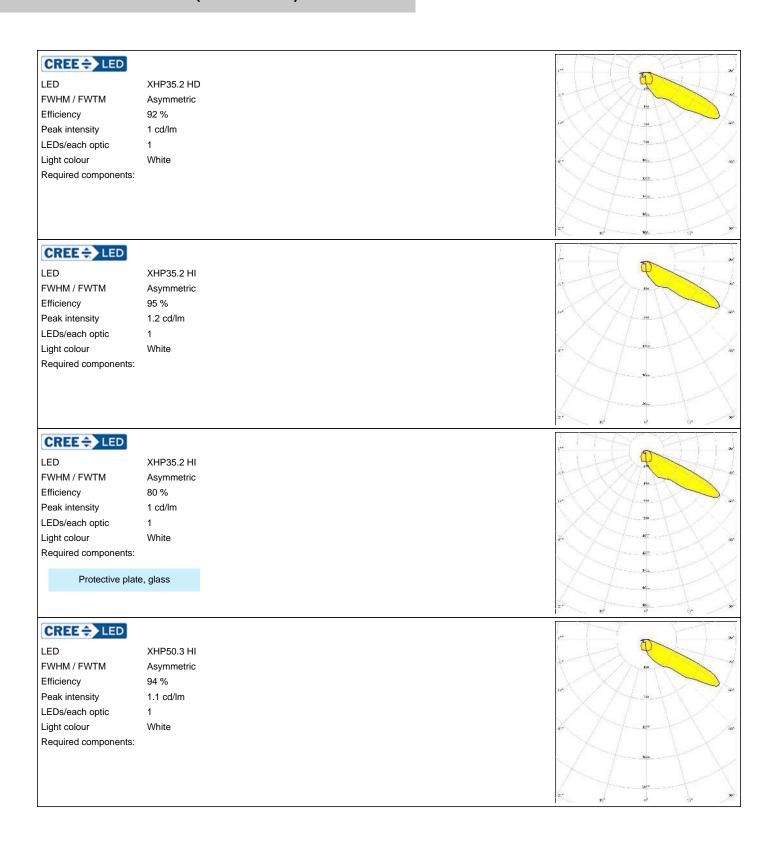




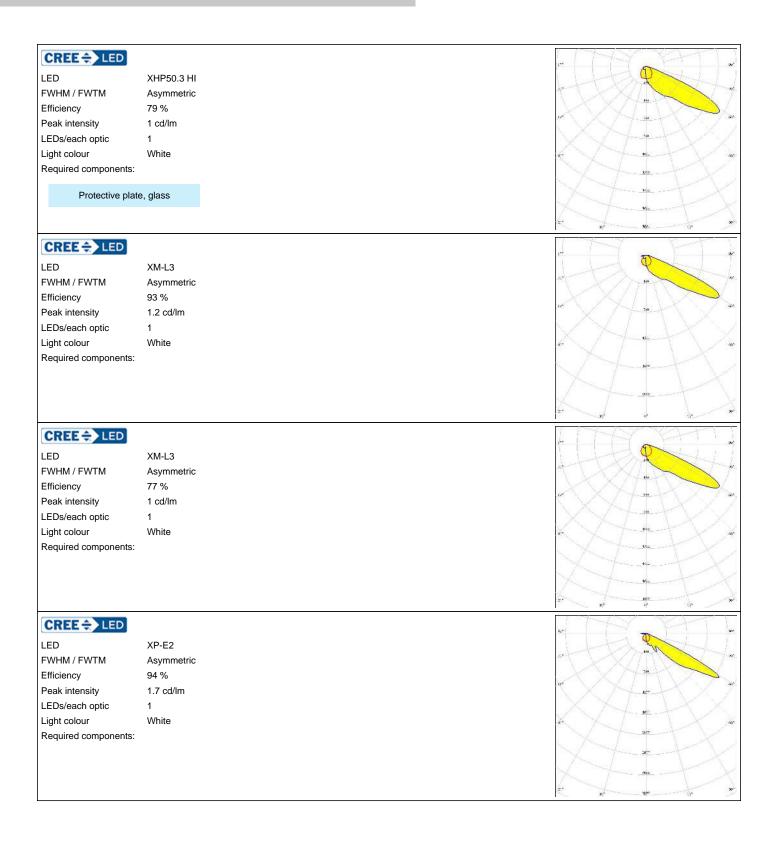




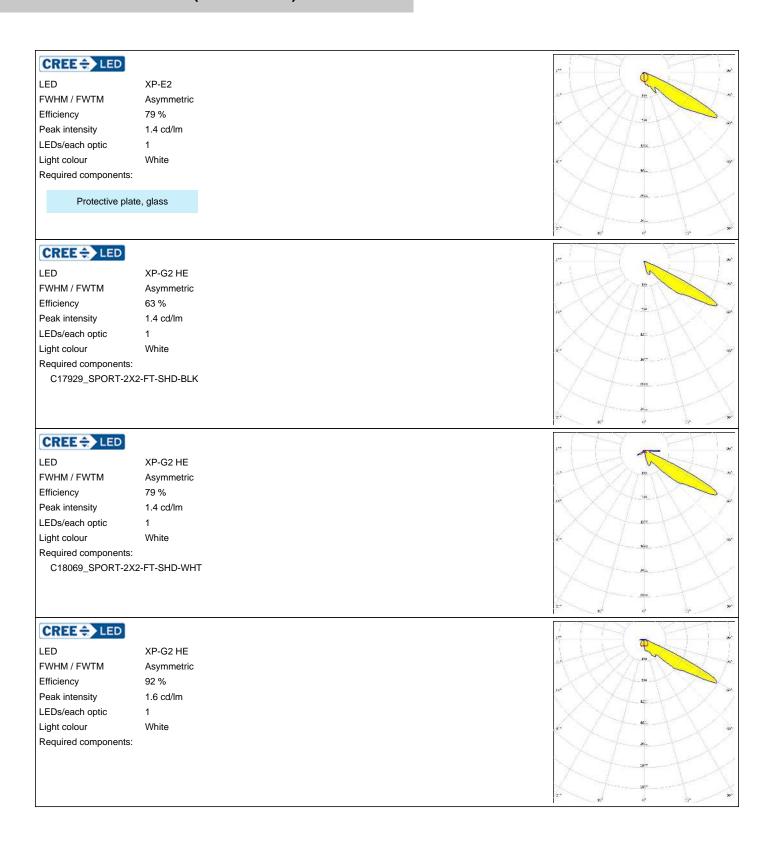




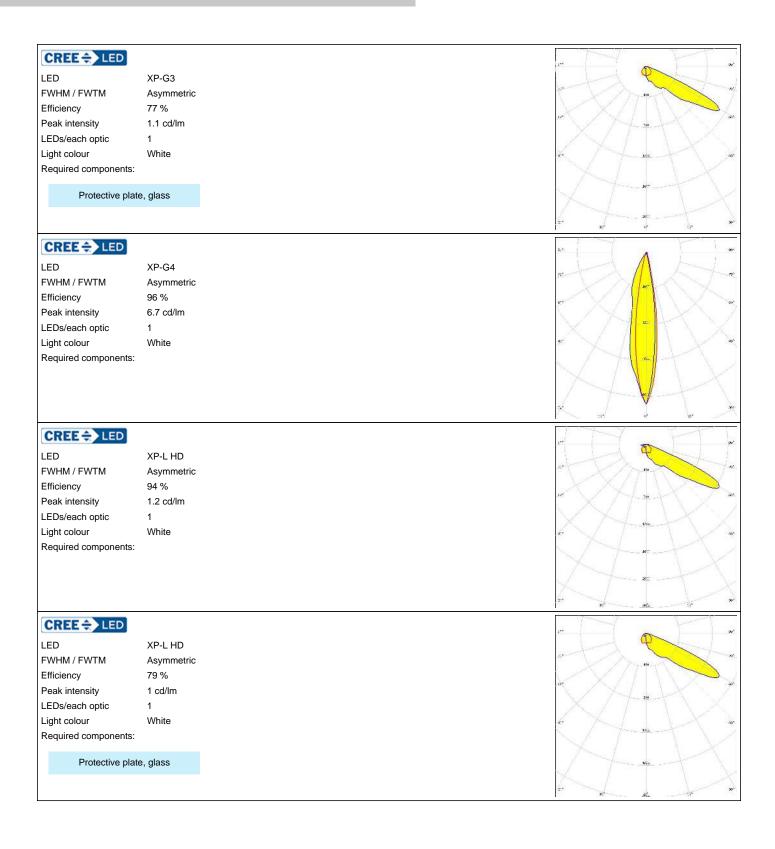




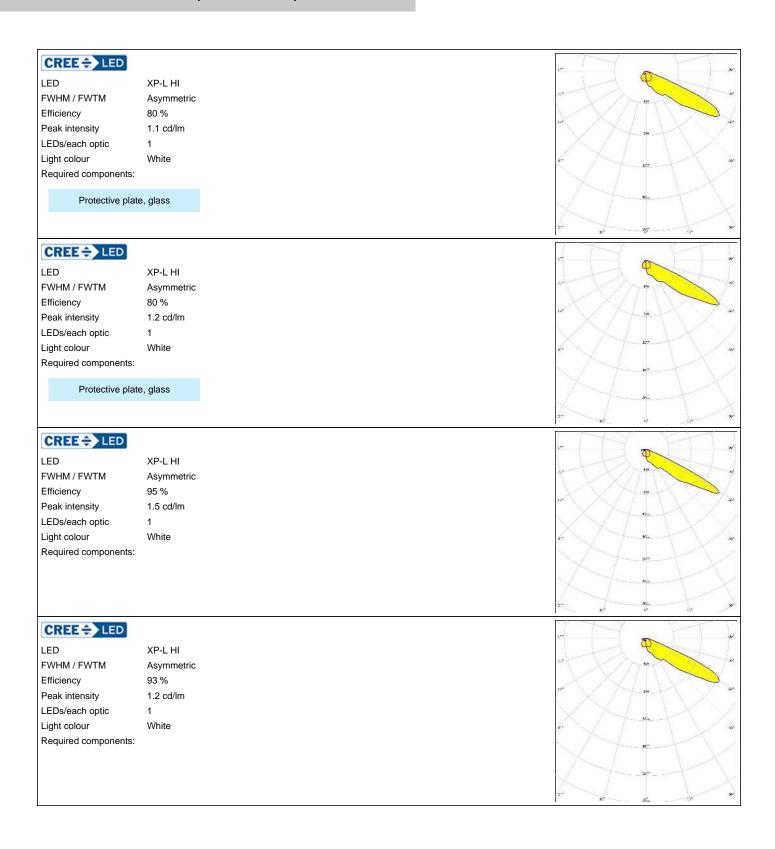




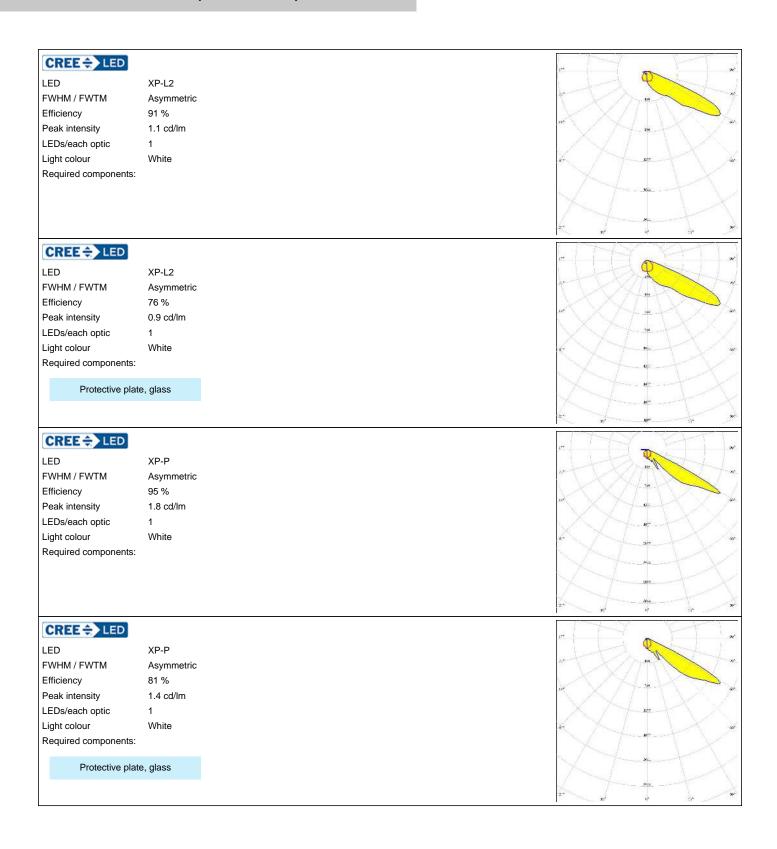




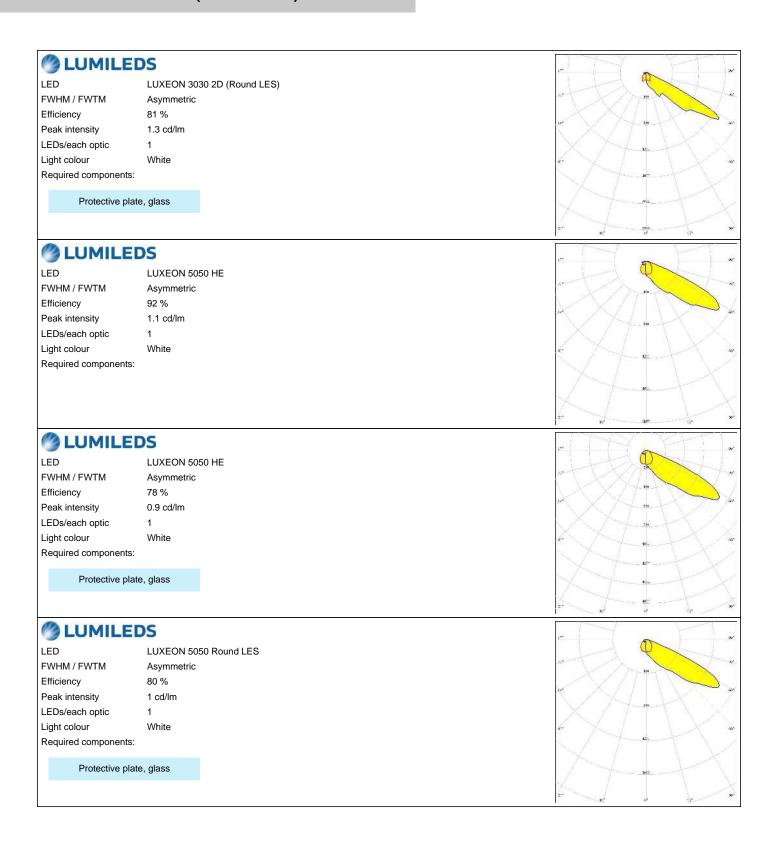



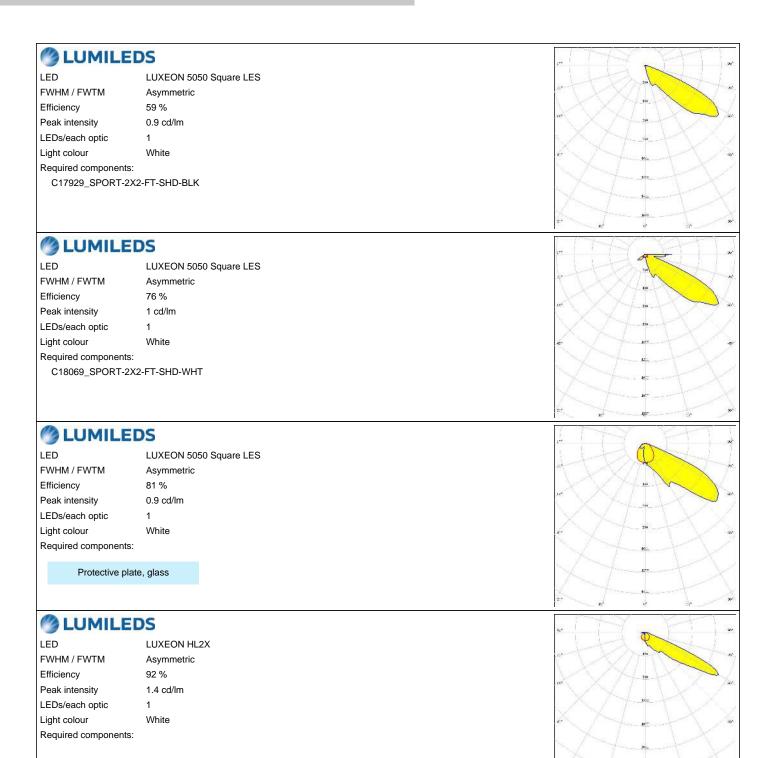



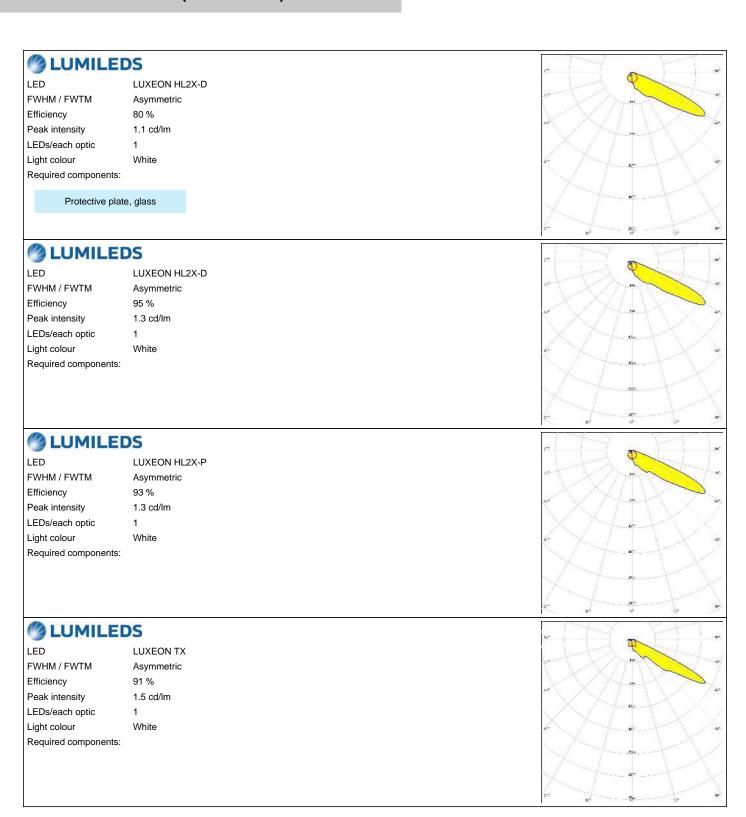






LED LUXEON XR-HL2X (L2H2-xxxxxxMLU010)

FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White

Required components:



LUMILEDS

LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)

FWHM / FWTM Asymmetric

Efficiency 80 %


Peak intensity 1.1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass




ELUMINUS

LED SFT-70X-WCS

FWHM / FWTM 106.0 + 20.0° / 156.0 + 67.0°

Efficiency 95 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:




ELUMINUS


LED SFT-70X-WCS

FWHM / FWTM 106.0 + 18.0° / 180.0 + 66.0°

Efficiency 95 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:






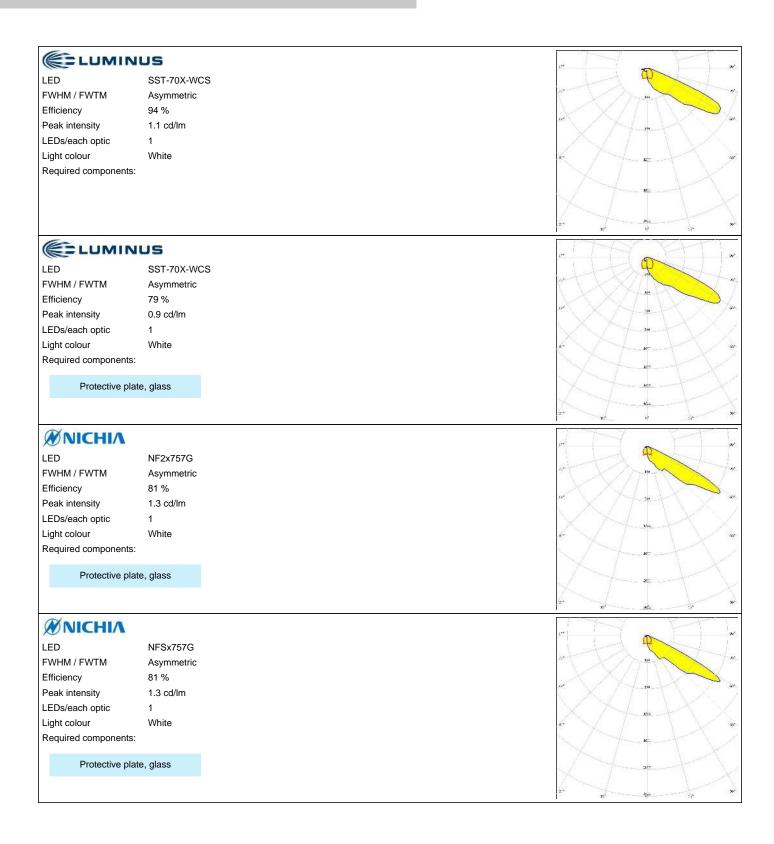


15/29




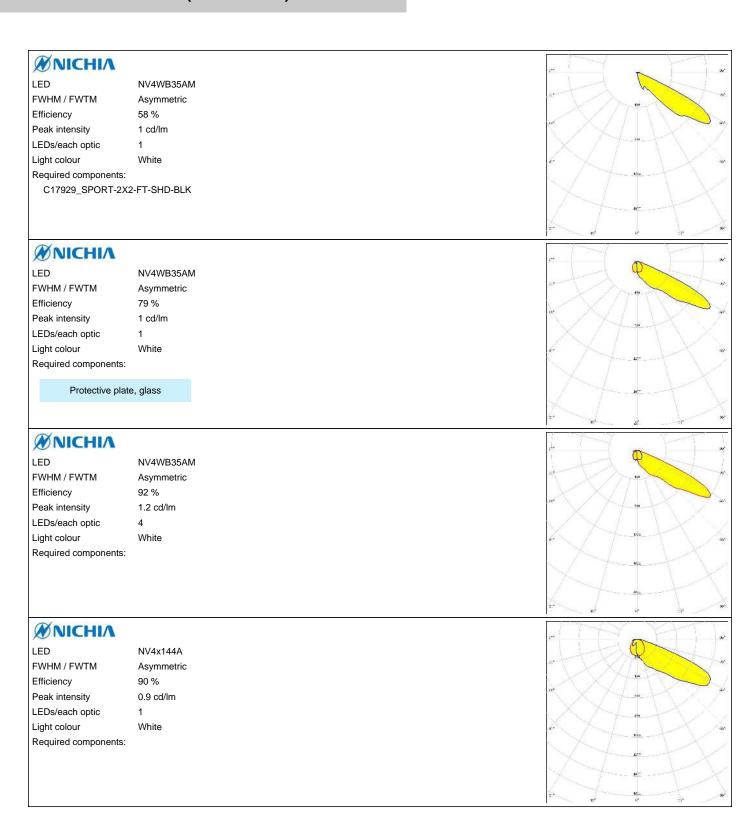




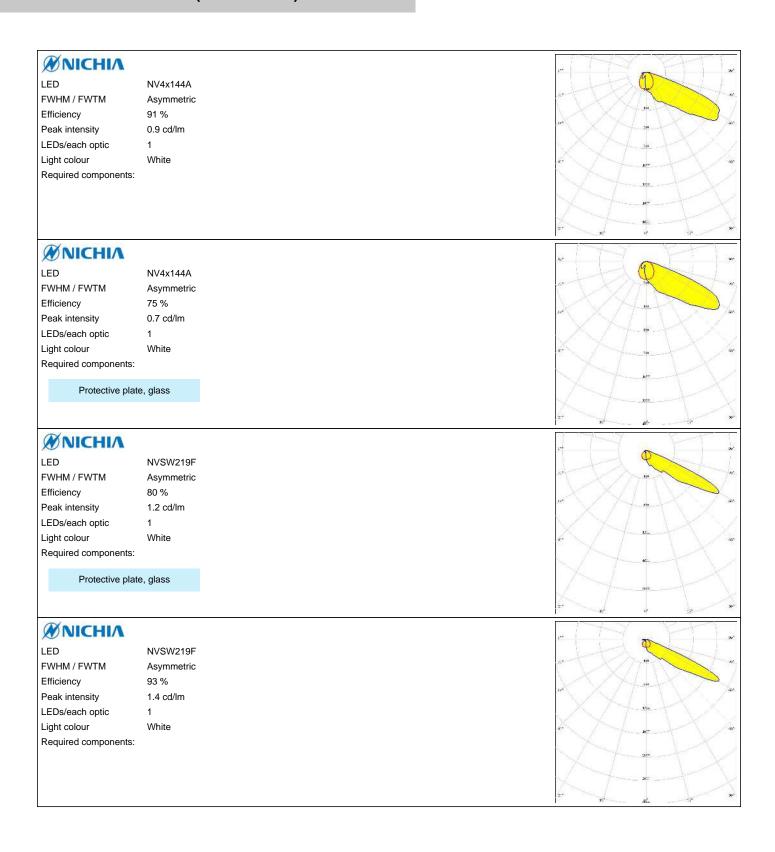



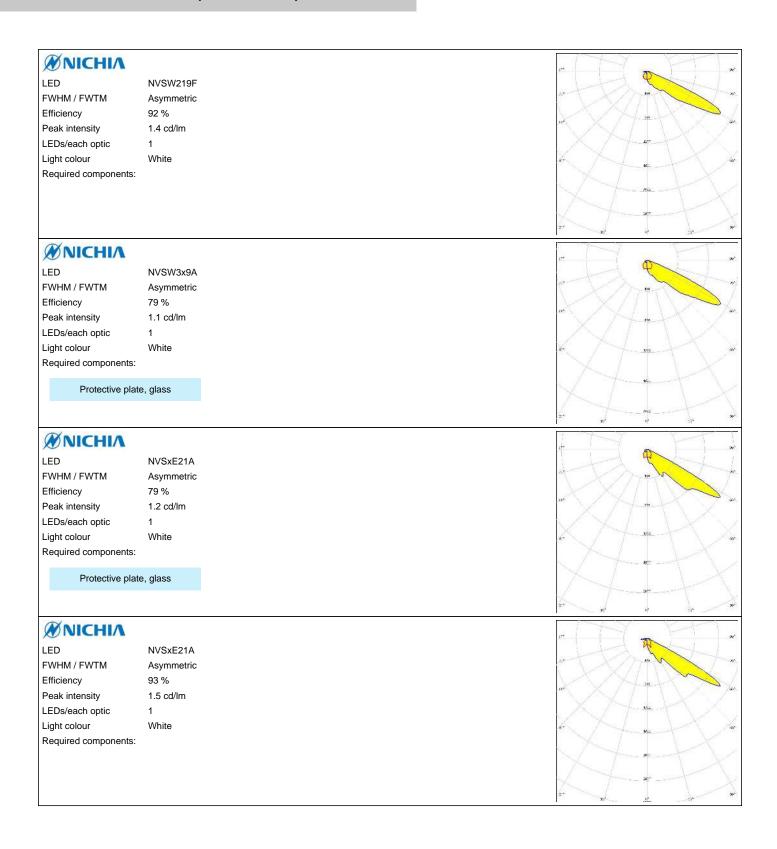



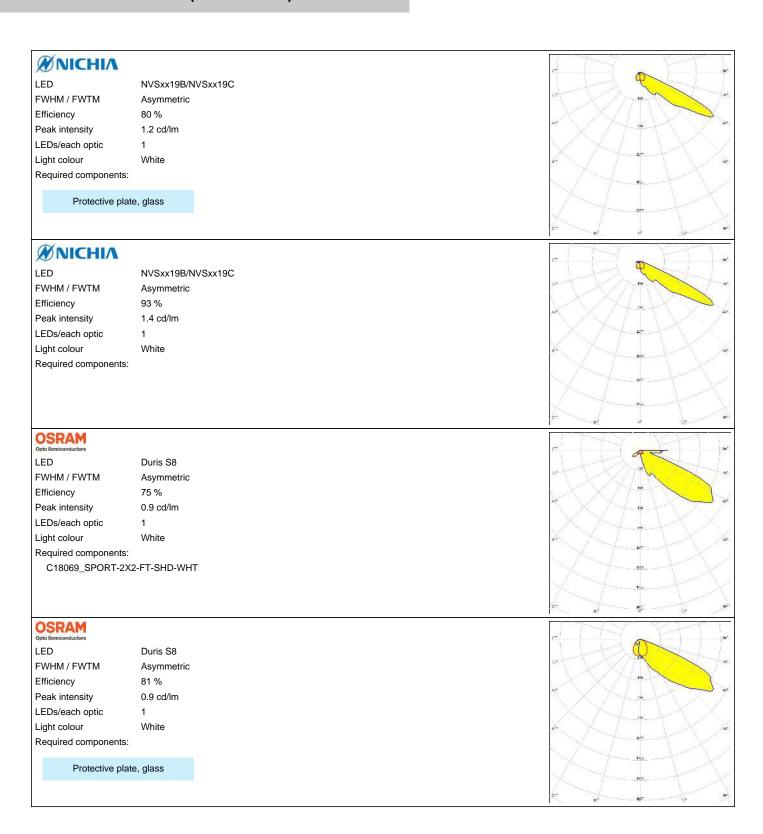




OSRAM Opto Semiconductors LED Duris S8 FWHM / FWTM Asymmetric Efficiency 58 % Peak intensity 0.8 cd/lm LEDs/each optic Light colour White Required components: C17929_SPORT-2X2-FT-SHD-BLK OSRAM Opto Semiconductor LED Duris S8 FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 1 cd/lm LEDs/each optic 1 White Light colour Required components: OSRAM Opto Semiconductors LED OSCONIQ P 3737 (2W version) $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 81 % Peak intensity 1.3 cd/lm LEDs/each optic 1 Light colour White Required components: Protective plate, glass OSRAM Opto Semiconductors LED OSCONIQ P 3737 (3W version) FWHM / FWTM Asymmetric Efficiency 80 % Peak intensity 1.1 cd/lm LEDs/each optic 1 White Light colour Required components: Protective plate, glass



OSRAM Opto Semiconductors

LED OSCONIQ P 3737 Flat

FWHM / FWTM Asymmetric Efficiency 95 % Peak intensity 1.4 cd/lm LEDs/each optic Light colour White Required components:




OSRAM

LED OSCONIQ P 3737 Flat

FWHM / FWTM Asymmetric Efficiency 84 % Peak intensity 1.2 cd/lm LEDs/each optic 1 White Light colour Required components:

Protective plate, glass




OSRAM Opto Semiconductors

LED OSCONIQ S 5050 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 80 % Peak intensity 0.9 cd/lm LEDs/each optic 1

Light colour White Required components:


Protective plate, glass



OSRAM Opto Semiconductors

LED OSCONIQ S 5050 FWHM / FWTM Asymmetric 94 % Efficiency Peak intensity 1 cd/lm LEDs/each optic White Light colour

Required components:





OSRAM Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric Efficiency 91 % Peak intensity 1.5 cd/lm LEDs/each optic Light colour White




OSRAM

Required components:

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric Efficiency 85 % Peak intensity 1.3 cd/lm LEDs/each optic 1 White Light colour Required components:

Protective plate, glass




OSRAM Opto Semiconductors

OSLON Square Flat LED

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 84 % Peak intensity 1.4 cd/lm LEDs/each optic 1 Light colour White

Protective plate, glass




OSRAM Opto Semiconductors

Required components:

LED OSLON Square Flat

FWHM / FWTM Asymmetric 94 % Efficiency Peak intensity 1.6 cd/lm LEDs/each optic White Light colour Required components:






OSRAM Opto Semiconductors

LED OSTAR Projection Compact (KW.CSLNM1.TG)

FWHM / FWTM Asymmetric Efficiency 95 % Peak intensity 1.6 cd/lm LEDs/each optic Light colour White

Required components:




SAMSUNG

LED LH231B FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 1.4 cd/lm

LEDs/each optic 1 White Light colour

Required components:




SAMSUNG

LED LH351B FWHM / FWTM Asymmetric Efficiency 81 % Peak intensity 1.3 cd/lm

LEDs/each optic 1 Light colour White Required components:

Protective plate, glass




SAMSUNG

FWHM / FWTM Asymmetric Efficiency 82 % Peak intensity 1.2 cd/lm LEDs/each optic

1 White Light colour Required components:

Protective plate, glass





SAMSUNG

LH351C 93 %

FWHM / FWTM

Asymmetric

Efficiency Peak intensity


1.4 cd/lm

LEDs/each optic

Light colour

White

Required components:



SAMSUNG

LED

LH351D

FWHM / FWTM

Asymmetric

Efficiency

80 %

Peak intensity

1 cd/lm

LEDs/each optic


1

Light colour

White

Required components:

Protective plate, glass



SAMSUNG

LED

LH351D

FWHM / FWTM

Asymmetric

Efficiency

92 %

Peak intensity

1.2 cd/lm


LEDs/each optic

1

Light colour

White

Required components:



SAMSUNG

LH502C

FWHM / FWTM

Asymmetric

Efficiency Peak intensity 79 % 0.9 cd/lm


LEDs/each optic

Light colour

White

Required components:


Protective plate, glass






SAMSUNG LH502C FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 1 cd/lm LEDs/each optic Light colour White Required components: SAMSUNG LED LH508A Plus FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 1 cd/lm LEDs/each optic 1 White Light colour Required components: SAMSUNG LED LH508A Plus FWHM / FWTM Asymmetric Efficiency 82 % Peak intensity 0.9 cd/lm LEDs/each optic 1 Light colour White Required components: Protective plate, glass CHOIL SECUL SEMICONDUCTOR LED MJT 5050 FWHM / FWTM Asymmetric Efficiency 79 % Peak intensity 0.9 cd/lm LEDs/each optic White Light colour Required components: Protective plate, glass



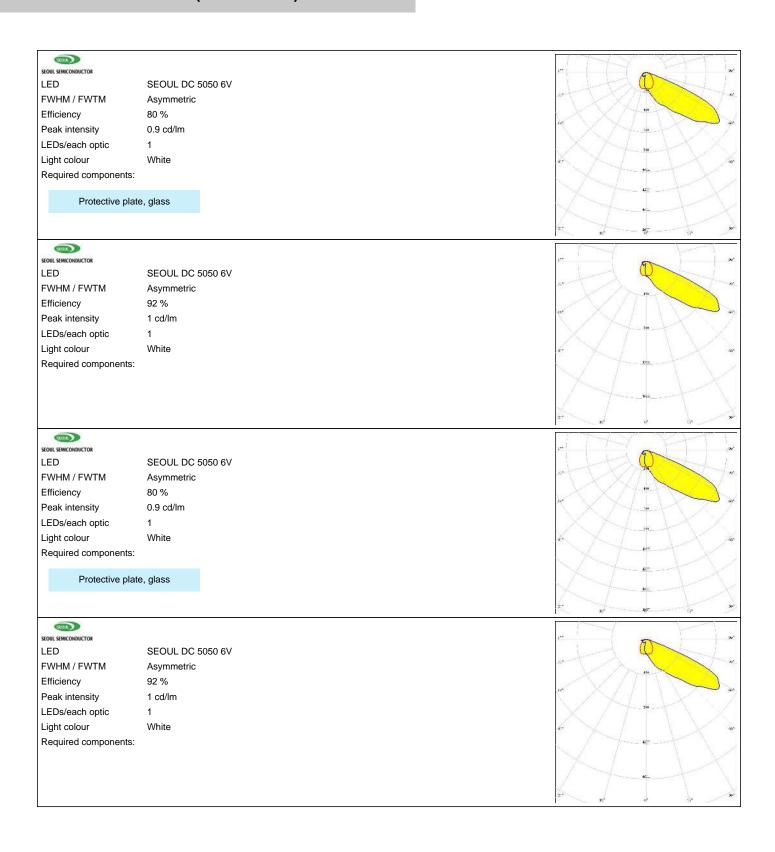



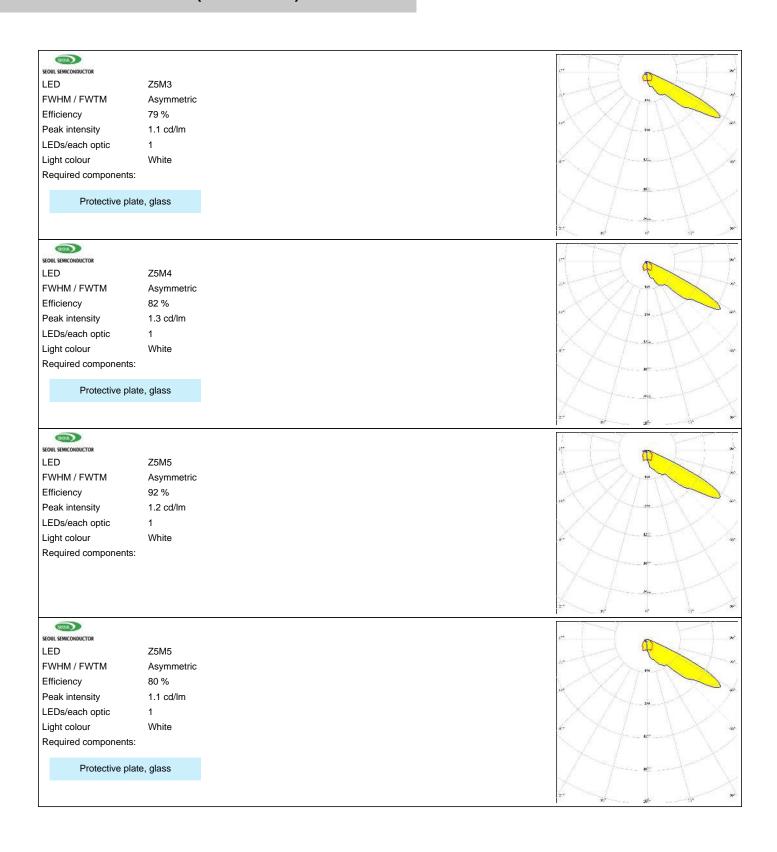







PRODUCT DATASHEET C17410_SPORT-2X2-FT6

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

29/29

www.ledil.com/ where_to_buy