


Dual IGBT HVIGBT Module 150 Amperes/4500 Volts

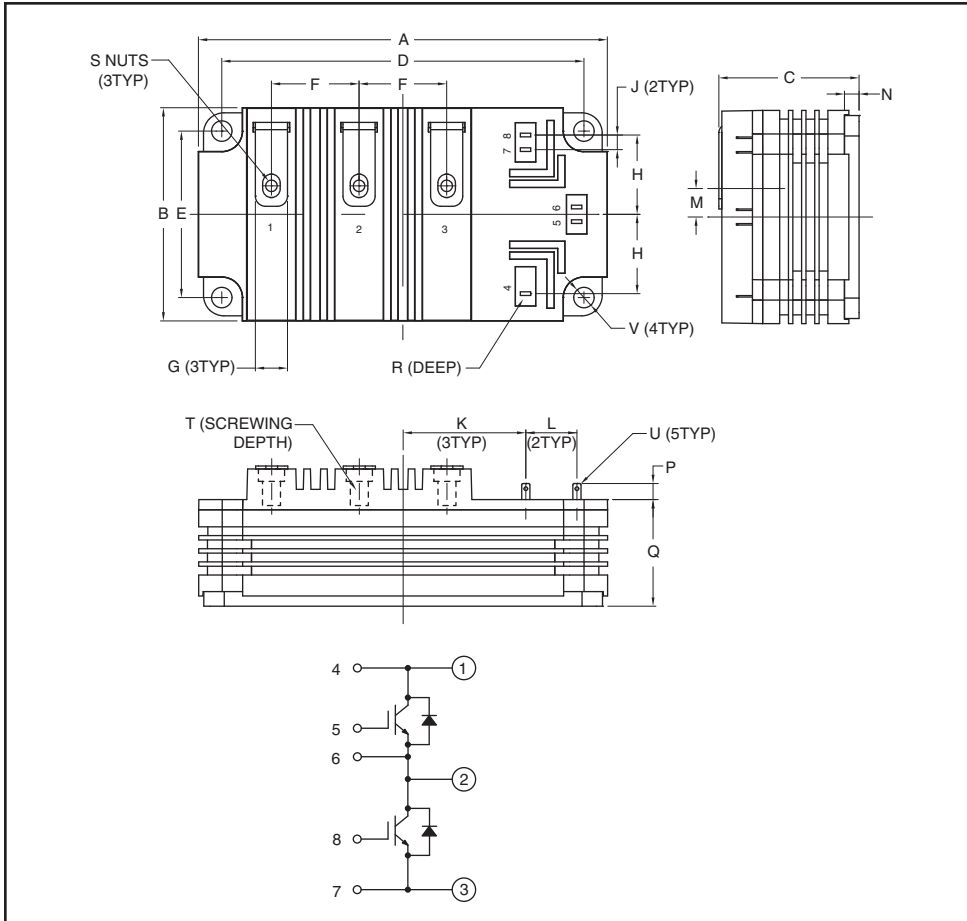

Description:

Powerex HVIGBTs feature highly insulating housings that offer enhanced protection by means of greater creepage and strike clearance distance for many demanding applications like medium voltage drives and auxiliary traction applications.

Features:

- 40 to 150°C Extended Temperature Range
- 100% Dynamic Tested
- 100% Partial Discharge Tested
- Advanced Mitsubishi H-Series Chip Technology
- Aluminum Nitride (AlN) Ceramic Substrate for Low Thermal Impedance
- Complementary Line-up in Expanding Current Ranges to Mitsubishi HVIGBT Power Modules
- Copper Baseplate
- Creepage and Clearance Meet IEC 60077-1
- Rugged SWSOA and RRSOA

Applications:

- High Voltage Power Supplies
- Medium Voltage Drives
- Motor Drives
- Traction

Outline Drawing and Circuit Diagram

| Dimensions | Inches | Millimeters |
|------------|-----------|-------------|
| A | 5.51 | 140.0 |
| B | 2.87 | 73.0 |
| C | 1.89 | 48.0 |
| D | 4.88±0.01 | 124.0±0.25 |
| E | 2.24±0.01 | 57.0±0.25 |
| F | 1.18 | 30.0 |
| G | 0.43 | 11.0 |
| H | 1.07 | 27.15 |
| J | 0.20 | 5.0 |
| K | 1.65 | 42.0 |

| Dimensions | Inches | Millimeters |
|------------|-------------|-------------|
| L | 0.69±0.01 | 17.5±0.25 |
| M | 0.38 | 9.75 |
| N | 0.20 | 5.0 |
| P | 0.22 | 5.5 |
| Q | 1.44 | 36.5 |
| R | 0.16 | 4.0 |
| S | M6 Metric | M6 |
| T | 0.63 Min. | 16.0 Min. |
| U | 0.11 x 0.02 | 2.8 x 0.5 |
| V | 0.28 Dia. | 7.0 Dia. |

QID4515001
Dual IGBT HVIGBT Module
 150 Amperes/4500 Volts

Absolute Maximum Ratings, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

| Ratings | Symbol | QID4515001 | Units |
|---|-----------|------------|-------------------------|
| Junction Temperature | T_j | -40 to 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 to 125 | $^\circ\text{C}$ |
| Collector-Emitter Voltage ($V_{GE} = 0\text{V}$) | V_{CES} | 4500 | Volts |
| Gate-Emitter Voltage ($V_{CE} = 0\text{V}$) | V_{GES} | ± 20 | Volts |
| Collector Current, DC ($T_C = 91^\circ\text{C}$) | I_C | 150 | Amperes |
| Peak Collector Current (Pulse) | I_{CM} | 300^{*1} | Amperes |
| Diode Forward Current ^{*2} | I_F | 150 | Amperes |
| Diode Forward Surge Current (Pulse) ^{*2} | I_{FM} | 300^{*1} | Amperes |
| I^2t for Diode ($t = 10\text{ms}$) | I^2t | 10 | kA^2sec |
| Maximum Collector Dissipation ($T_C = 25^\circ\text{C}$, IGBT Part, $T_{j(\text{max})} \leq 150^\circ\text{C}$) | P_C | 1440 | Watts |
| Mounting Torque, M6 Terminal Screws | — | 44 | in-lb |
| Mounting Torque, M6 Mounting Screws | — | 44 | in-lb |
| Module Weight (Typical) | — | 900 | Grams |
| Isolation Voltage (Charged Part to Baseplate, AC 60Hz 1 min.) | V_{iso} | 9.0 | kVolts |
| Partial Discharge | Q_{pd} | 10 | pC |
| $(V_1 = 4800\text{ V}_{RMS}, V_2 = 3500\text{ V}_{RMS}, f = 60\text{Hz (Acc. to IEC 1287)})$ | | | |
| Maximum Short-Circuit Pulse Width, ($V_{CC} \leq 3200\text{V}, V_{GE} = \pm 15\text{V}, R_{G(\text{off})} \geq 60\Omega, T_j = 125^\circ\text{C}$) | t_{psc} | 10 | μs |

Electrical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|---|----------------------|---|------|------|------------|---------------|
| Collector-Cutoff Current | I_{CES} | $V_{CE} = V_{CES}, V_{GE} = 0\text{V}$ | — | — | 2.7 | mA |
| Gate Leakage Current | I_{GES} | $V_{GE} = V_{GES}, V_{CE} = 0\text{V}$ | — | — | 0.5 | μA |
| Gate-Emitter Threshold Voltage | $V_{GE(\text{th})}$ | $I_C = 10\text{mA}, V_{CE} = 10\text{V}$ | 4.5 | 6.0 | 7.5 | Volts |
| Collector-Emitter Saturation Voltage | $V_{CE(\text{sat})}$ | $I_C = 150\text{A}, V_{GE} = 15\text{V}, T_j = 25^\circ\text{C}$ | — | 3.5 | 3.9^{*3} | Volts |
| | | $I_C = 150\text{A}, V_{GE} = 15\text{V}, T_j = 125^\circ\text{C}$ | — | 4.0 | — | Volts |
| Total Gate Charge | Q_G | $V_{CC} = 2250\text{V}, I_C = 150\text{A}, V_{GE} = 15\text{V}$ | — | 1.4 | — | μC |
| Emitter-Collector Voltage ^{*2} | V_{EC} | $I_E = 150\text{A}, V_{GE} = 0\text{V}$ | — | 4.7 | 5.6 | Volts |

*1 Pulse width and repetition rate should be such that device junction temperature (T_j) does not exceed $T_{j(\text{max})}$ rating.

*2 Represents characteristics of the anti-parallel, emitter-to-collector free-wheel diode (FWDI).

*3 Pulse width and repetition rate should be such that device junction temperature rise is negligible.

QID4515001
Dual IGBT HVIGBT Module
 150 Amperes/4500 Volts

Electrical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|---|--------------|--|------|------------------|------|------------|
| Input Capacitance | C_{ies} | | — | 18 | — | nF |
| Output Capacitance | C_{oes} | $V_{GE} = 0V, V_{CE} = 10V$ | — | 1.33 | — | nF |
| Reverse Transfer Capacitance | C_{res} | | — | 0.4 | — | nF |
| Turn-on Delay Time | $t_{d(on)}$ | $V_{CC} = 2250V, I_C = 150A,$ | — | — | 1.5 | μs |
| Rise Time | t_r | $V_{GE} = \pm 15V,$ | — | — | 0.5 | μs |
| Turn-off Delay Time | $t_{d(off)}$ | $R_G = 60\Omega, L_S = 180nH$ | — | — | 3.5 | μs |
| Fall Time | t_f | Inductive Load | — | — | 1.2 | μs |
| Turn-on Switching Energy | E_{on} | $T_j = 125^\circ\text{C}, I_C = 150A, V_{GE} = \pm 15V,$ | — | 600 | — | mJ/P |
| Turn-off Switching Energy | E_{off} | $R_G = 60\Omega, V_{CC} = 2250V,$ $L_S = 180nH, \text{ Inductive Load}$ | — | 450 | — | mJ/P |
| Diode Reverse Recovery Time ^{*2} | t_{rr} | $V_{CC} = 2250V, I_E = 150A,$ | — | — | 1.8 | μs |
| Diode Reverse Recovery Charge ^{*2} | Q_{rr} | $V_{GE} = \pm 15V, R_{G(on)} = 60\Omega,$ | — | 81 ^{*1} | — | μC |
| Diode Reverse Recovery Energy | E_{rec} | $L_S = 180nH, \text{ Inductive Load}$ | — | 55 | — | mJ/P |
| Stray Inductance (C1-E2) | L_{SCE} | | — | 60 | — | nH |
| Lead Resistance Terminal-Chip | R_{CE} | | — | 0.8 | — | m Ω |

Thermal and Mechanical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--|-----------------|---|------|-------|-------|--------------------|
| Thermal Resistance, Junction to Case ^{*4} | $R_{th(j-c)} Q$ | Per IGBT | — | — | 0.087 | $^\circ\text{C/W}$ |
| Thermal Resistance, Junction to Case ^{*4} | $R_{th(j-c)} D$ | Per FWDi | — | — | 0.174 | $^\circ\text{C/W}$ |
| Contact Thermal Resistance, Case to Fin | $R_{th(c-f)}$ | Per Module, Thermal Grease Applied, $\lambda_{grease} = 1W/mK$ | — | 0.018 | — | $^\circ\text{C/W}$ |
| Comparative Tracking Index | CTI | | 600 | — | — | |
| Clearance Distance in Air (Terminal to Base) | $d_{a(t-b)}$ | | 35.0 | — | — | mm |
| Creepage Distance Along Surface (Terminal to Base) | $d_{s(t-b)}$ | | 64 | — | — | mm |
| Clearance Distance in Air (Terminal to Terminal) | $d_{a(t-t)}$ | | 19 | — | — | mm |
| Creepage Distance Along Surface (Terminal to Terminal) | $d_{s(t-t)}$ | | 54 | — | — | mm |


^{*1} Pulse width and repetition rate should be such that device junction temperature rise is negligible.

^{*2} Represents characteristics of the anti-parallel, emitter-to-collector free-wheel diode (FWDi).


^{*4} T_C measurement point is just under the chips.

QID4515001
Dual IGBT HVIGBT Module
 150 Amperes/4500 Volts


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

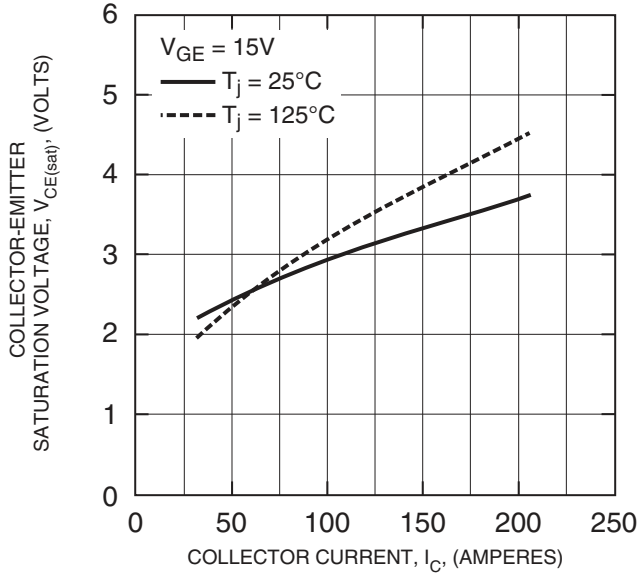


FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)

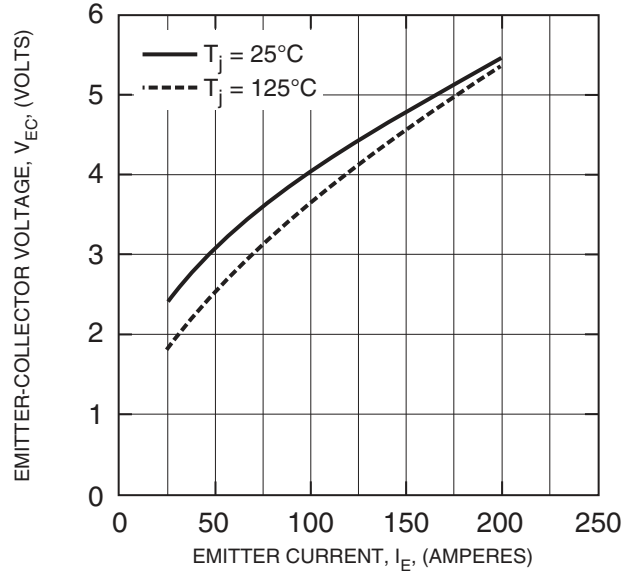

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT)

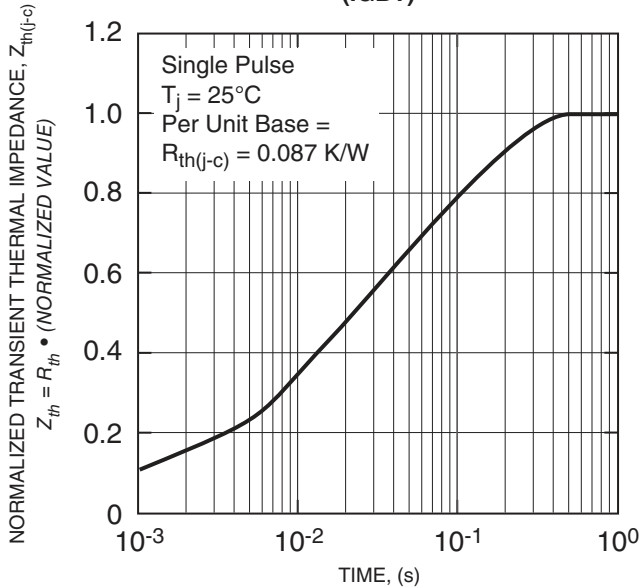


TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (FWDi)

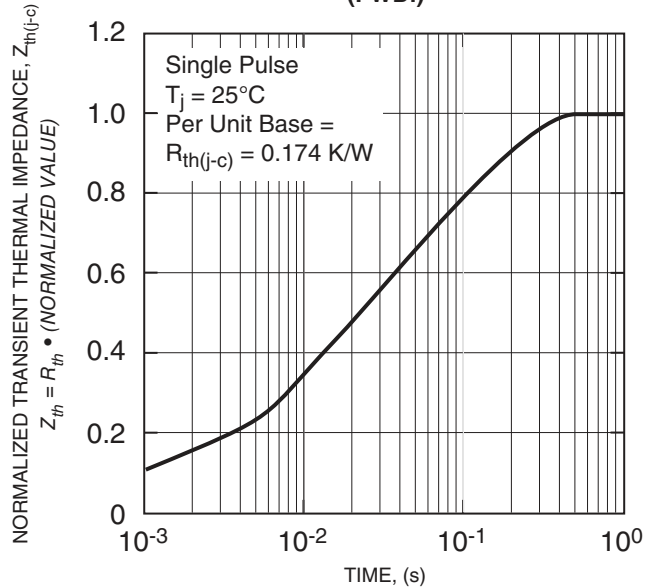


QID4515001
Dual IGBT HVIGBT Module
 150 Amperes/4500 Volts


HALF-BRIDGE TURN-ON SWITCHING ENERGY CHARACTERISTICS (TYPICAL)

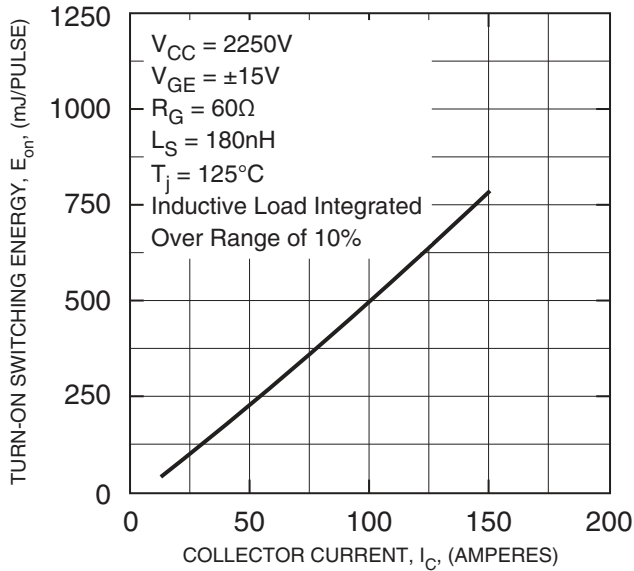


HALF-BRIDGE TURN-OFF SWITCHING ENERGY CHARACTERISTICS (TYPICAL)

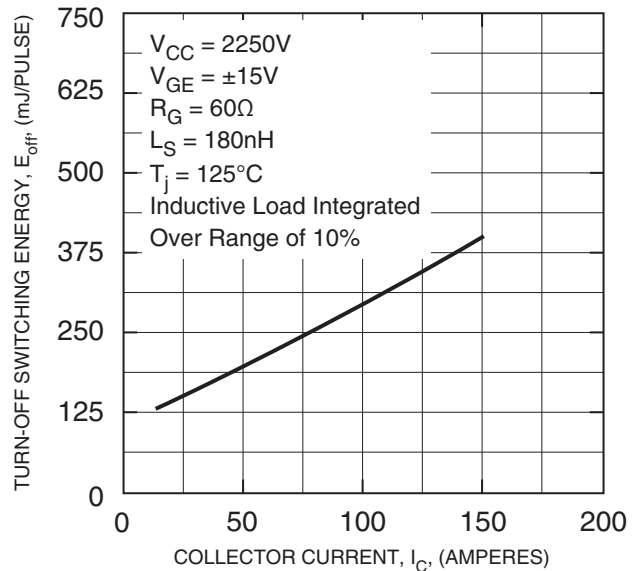

FREE-WHEEL DIODE REVERSE RECOVERY CHARACTERISTICS (TYPICAL)

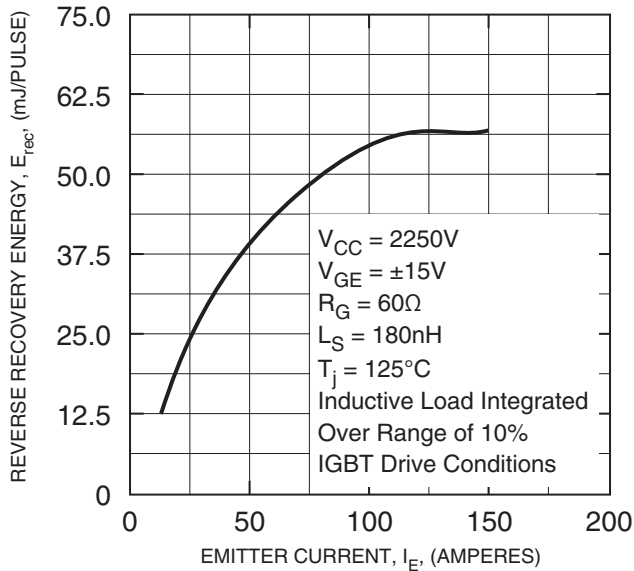

TURN-OFF SWITCHING SAFE OPERATING AREA (RBSOA) (TYPICAL)

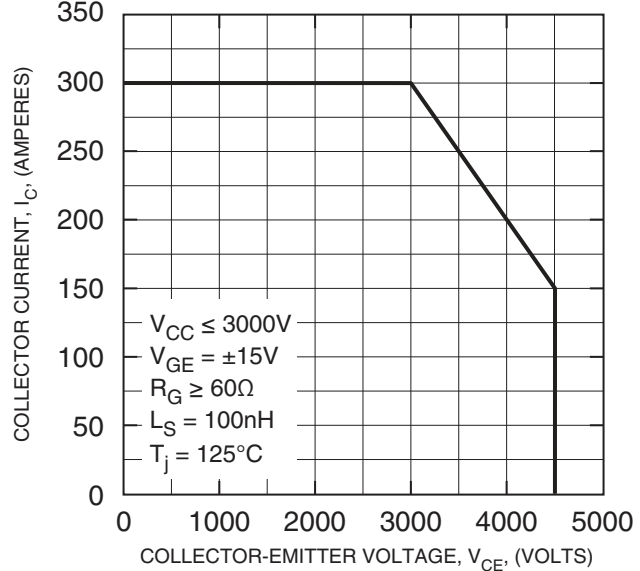

Information presented is based upon manufacturers testing and projected capabilities. This information is subject to change without notice. The manufacturer makes no claim as to the suitability of use, reliability, capability, or future availability of this product.

QID4515001
Dual IGBT HVIGBT Module
150 Amperes/4500 Volts

DIODE REVERSE RECOVERY SAFE OPERATING AREA (TYPICAL)

