


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	RE-F-06478	J.M	M.B	99-7-29					

APPLICATION STANDARD		OPERATING TEMPERATURE RANGE	STORAGE TEMPERATURE RANGE
RATING VOLTAGE	AC 50 V	-55 °C TO 85 °C	-10 °C TO 60 °C
CURRENT	0.3 A	OPERATING HUMIDITY RANGE	RELATIVE HUMIDITY 95% MAX (NO DEW CONDENSATION IS PERMITTED)

### SPECIFICATIONS

ITEM	TEST METHOD	REQUIREMENT	Q/T	A/T
<b>CONSTRUCTION</b>				
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT	ACCORDING TO DRAWING		<input type="radio"/>
MARKING	CONFIRMED VISUALLY			<input type="radio"/>
<b>ELECTRICAL CHARACTERISTICS</b>				
CONTACT RESISTANCE	100 mA (DC OR 1000 Hz)	60 mΩ MAX.		<input type="radio"/>
INSULATION RESISTANCE	100 V DC.	100 MΩ MIN.		<input type="radio"/>
VOLTAGE PROOF	150 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN		<input type="radio"/>
<b>MECHANICAL CHARACTERISTICS</b>				
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	INSERTION FORCE: 84 N MAX WITHDRAWAL FORCE: 3.5 N MIN		<input type="radio"/>
MECHANICAL OPERATION	50 TIMES INSERTION AND EXTRactions	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.		<input type="radio"/>
VIBRATION	FREQUENCY: 10 TO 55 Hz, SINGLE AMPLITUDE: 0.75 mm, ... m/s <sup>2</sup> AT 10 CYCLES FOR 3 DIRECTIONS	1) NO ELECTRICAL DISCONTINUITY OF PART. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.		<input type="radio"/>
SHOCK	490 m/s <sup>2</sup> DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.			<input type="radio"/>

<b>ENVIRONMENTAL CHARACTERISTICS</b>				
DAMP HEAT (STEADY STATE)	EXPOSED AT 40±2 °C, 90~95 %, 96 h	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN. 3) NO DAMAGE, CRACK AND LOOSENESS OF PART.		<input type="radio"/>
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55→-15~35→ 85→15~35°C TIME 30→ 2~ 3→ 30→ 2~ 3 min. UNDER 5 CYCLES.			<input type="radio"/>
DRY HEAT	EXPOSED AT 85 °C, 96 h.	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.		<input type="radio"/>
COLD	EXPOSED AT -55 °C, 96 h.			<input type="radio"/>
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	NO HEAVY CORROSION.		<input type="radio"/>
SULPHUR DIOXIDE	EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD: JIS C 0090)	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO HEAVY CORROSION.		<input type="radio"/>
RESISTANCE TO SOLDERING HEAT	REFLOW: RECOMMENDED TEMPERATURE PROFILE	NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT.		<input type="radio"/>

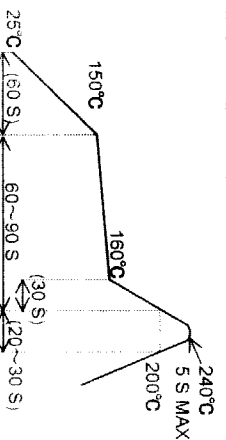

SOLDERABILITY	REMARKS	DESIGNED	CHECKED	APPROVED	RELEASED
	TO BE TESTED UNDER THE ABOVE CONDITIONS SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s.				

REMARKS	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	S. Kitajima 99.05.25	J. Matsukawa 99.05.25	M. Ishida 99.05.26	Y. Yoshimura 99.05.27	

UNLESS OTHERWISE SPECIFIED, REFER TO JIS C 5402.

NOTE Q1: QUALIFICATION TEST AT ASSURANCE TEST O APPLICABLE TEST

TO PCK	USA	HIROSE ELECTRIC CO., LTD.	SPECIFICATION SHEET	PART NO.	FX11LA - 140P - SV
CL		DRAWING NO. ELC4 - 152103 -	CODE NO. CL 573 - 0045 - 0	1	1