


- 1 MATERIAL: NYLON UL94V-2 (NATURAL).
- 2. RECOMMENDED PANEL THICKNESS 2.29 MAX.
- 3 MARKING FOR UL LOGO AND CSA LOGO LOCATED APPROXIMATELY AS SHOWN.

MM	IN	MM	IN	MM	IN
2.36	.093	18.415	.7250	-	-
2.29	.090	17.018	.6700	-	-
0.38	.015	16.891	.6650	31.115	1.2250
0.25	.010	16.129	.6350	25.400	1.0000
0.13	.005	5.029	.1980	21.031	.8280
MM	IN	MM	IN	MM	IN

CONVERSION TABLE

RECOMMENDED PANEL CUTOUT

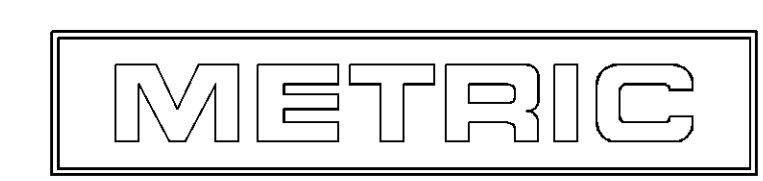

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. HUFFMAN	10-11-96	AMP AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS IN INCHES		CHK R. SWING	10-11-96	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. CASH	10-15-96	NAME RECEPTACLE, 9 CIRCUIT .093 COMMERCIAL PIN & SOCKET
0 PLC ±.010 1 PLC ±.010 2 PLC ±.010 3 PLC ±0.13 4 PLC ±.010		PRODUCT SPEC	APPLICATION SPEC	SIZE CASE CODE DRAWING NO A1 00779 C=770091
MATERIAL FINISH		RESTRICTED TO	WEIGHT	CUSTOMER DRAWING
SCALE 4:1		SHEET 1 OF 1		REV F