

1

2




3

4

5

6

7

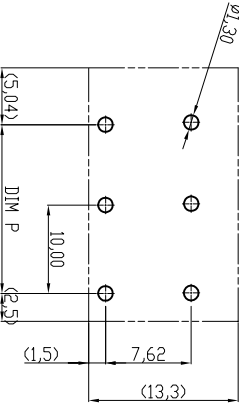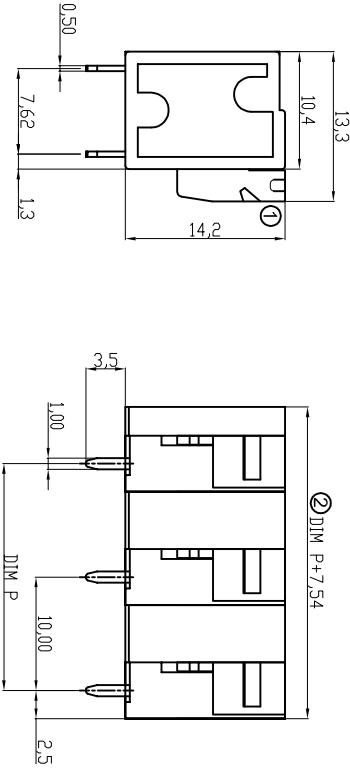

RECOMMENDER PCB LAYOUT

DIMENSION
 P (N-1)X10.0
 N=Number of poles

Poles	②Tolerance
2p-6p	±0.10
7p-12p	±0.20
13p-18p	±0.25
19p-24p	±0.30

Electrical cULus/VDE
 Voltage rating: 300VAC/450VAC
 Current rating: 10A/10A
 Wire range: 0.75-1.5mm²
 Solid wire(AWG): 14-24
 Stranded wire(AWG): 14-24
 Pull force:
 Screw:
 Wire strip length: 9-10mm
 Withstanding Voltage: 1.6kV/2.5kV
 Operating temperature: -40°C to +115°C
 Soldering temperature: 250°C±10°C/5 Sec
 Safety Approval:

Material
 Terminal body(Contact pin): Brass
 Wire guard:Stainless steel
 Surface of Solder tail: Tin plated
 Terminal (housing): Thermoplastic (UL94V-0) , GREEN(RAL6018/T)

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H

RoHS compliant
 Unit: mm

 File No.: E349947

Scale	Free
TOLERANCE	
X.	±0.50
X.X	±0.30
X.XX	±0.10
DIM	TOL
X.°	±1°
Angle	TOL

Id.	Modification	Date	Name
①	Update	16.04.2013	Amy
②	Update to new drawing and add UL	14.03.2016	Amy
③	Drawn	19.04.2010	Alex

Date	Name
19.04.2010	Alex
14.03.2016	Amy

Customer-No.
 ASSMANN WSW-No.
A-TB100-HAXXV

Drawing-No.
ASS 4122 CO

Replace
 rev02
 Sheet



1

2

3

4

5

6

7