


PERFORMANCE CHARACTERISTICS


CURRENT RATING:  
 1.5 A AT 20°C (FULLY LOADED)  
 1 A AT 70°C (FULLY LOADED)  
 RATED VOLTAGE: 500 V AC (CONT /CONT)  
 OPERATING TEMPERATURE : -55°C TO 125°C  
 CONTACT RESISTANCE : 20 mΩ MAX  
 INSERTION FORCE: 0.75N MAX/CONT  
 EXTRACTION FORCE : 0.15N MIN /CONT  
 INSULATION RESISTANCE: 10<sup>4</sup> MΩ MIN

NOTES

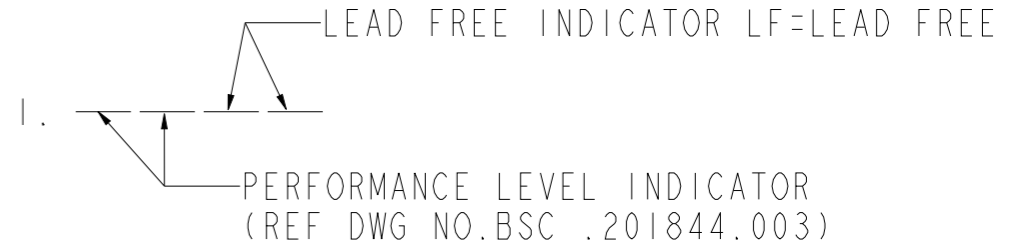

- THIS PRODUCT IS CSA APPROVED.  
THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004

LAY-OUT  
P.C.B. -HOLE

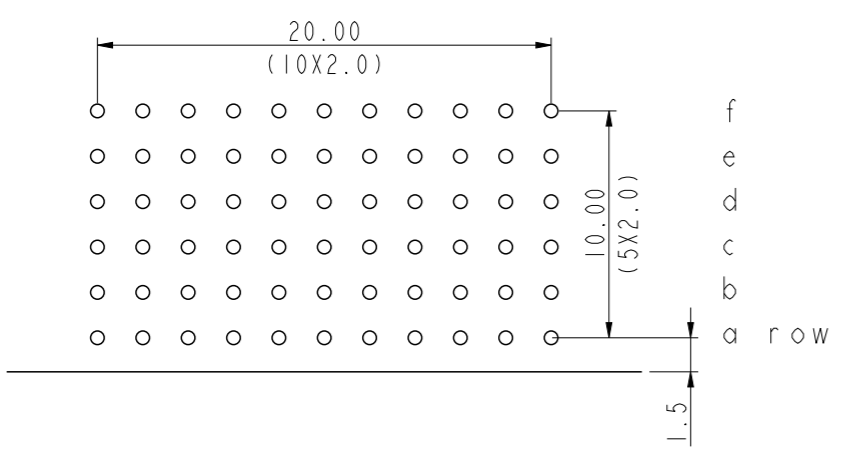

spec ref	-	dr	wcadmin, wcadm	2006/08/31	projection	mm	size	A3	scale	3.000	
tolerance std	ISO 406 ISO 1101	eng	Alex Babu	2020/06/18			ecn no	ELX-I-37327-1			
surface	linear	chr	-	-			rel level	Released			
ISO 1302	angular	appr	Kuriakose, San	2020/06/18	product family		dwg no	BSC201444050		rev	E
		linear	0.X	±0.2	cat. no.	HM2R30PA5108----	Product - Customer Drw	sheet 1 of 1			
		linear	0.XX	±0.1							
		linear	0.XXX	±-							
		angular	0°	±1°							