
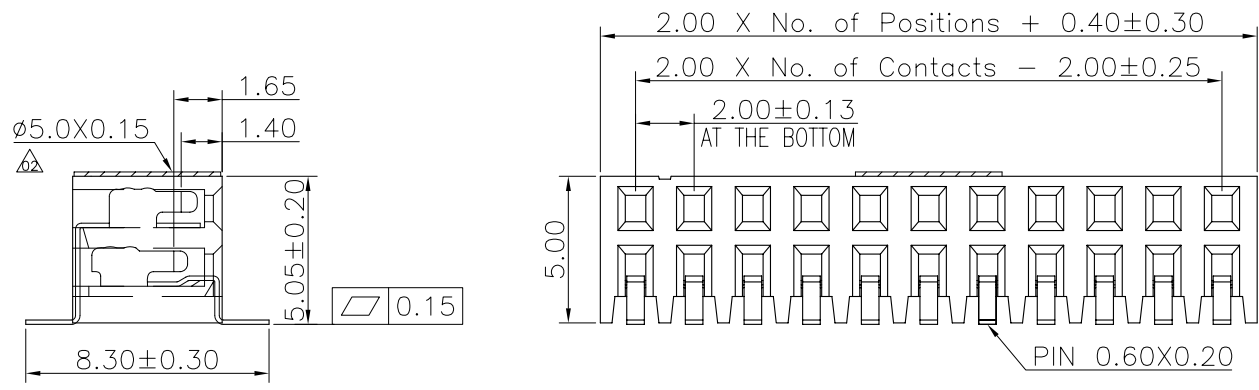
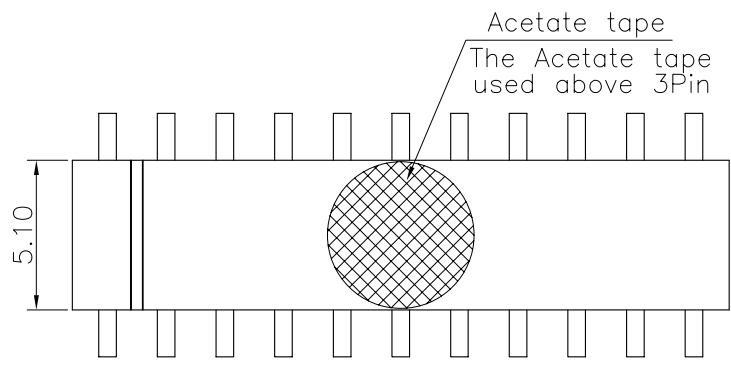


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2009.07.24	車 激
02	△2	變更圖號以及新增高溫膠紙	2011.09.16	黃小燕
03	△3	依業務要求, 增加卷裝包裝碼	2014.04.17	邱明周

Specifications  
 Current Rating: 2Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding Voltage: 500VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free) or the equivalent material  
 All materials must meet Greenconn hazardous substances control standards.

Recommended P.C.Board Layout  
 (Tolerance: ±0.05)

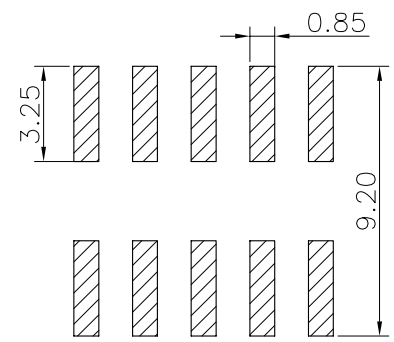

### Ordering Information

C SFC204 - XX XX A 001 R 1 A X

No. of Pins per Row 02~25  
 Standard Plating 02=Gold Flash  
 Selective Plating 01=Tin 05=Gold Flash/Tin  
 Color 1=Black  
 Standard Packing C=Tube  
 Selective Packing A=Box  
 △ D=Tape&Reel  
 G=Acetate tape+Tube  
 H=Acetate tape+Tape&Reel

格稜股份有限公司  
**Greenconn Corporation**

GENERAL TOLERANCE		DESIGNED: 邱明周	DATE: 2014.04.17
X.*±5.0°	X.±0.30	CHECKED: 曹 熙	DATE: 2014.04.17
.X*±3.0°	.X±0.25	CO SIGNED: 劉北平	DATE: 2014.04.17
.XX*±2.0°	.XX±0.15	APPROVED: 李 輝	DATE: 2014.04.17
.XXX*±1.0°	.XXX±0.10		

DWG. NO.	△ CSFC204-CA1RA
PART NO.	CSFC204-XXXX A001R1AX

TITLE:  
 2.00 FEMALE HEADER  
 DUAL ROWS SMT TYPE  
 CONNECTOR

REV. 03	UNIT. mm	SCALE. 4:1	PAGE. 1/1	
---------	----------	------------	-----------	--