


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XHLCOLOR
 HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 CONTACT BLADE: NICKEL SILVER
 SPRING: STAINLESS STEEL
2. P/N: 9214COLOR
 HOUSING: MOLDED ACETAL. AVAILABLE IN BLACK OR RED.
 FRAME: NICKEL PLATED BRASS
 CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-600/COLOR
 18AWG TINNED COPPER
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN ALL TEN COLORS
4. PERFORMANCE
 MAXIMUM CURRENT: 4.0 AMPS
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
 HANDS FREE: 5000 W.V.D.C.
 MAXIMUM TEMPERATURE: 200°F (93°C)

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

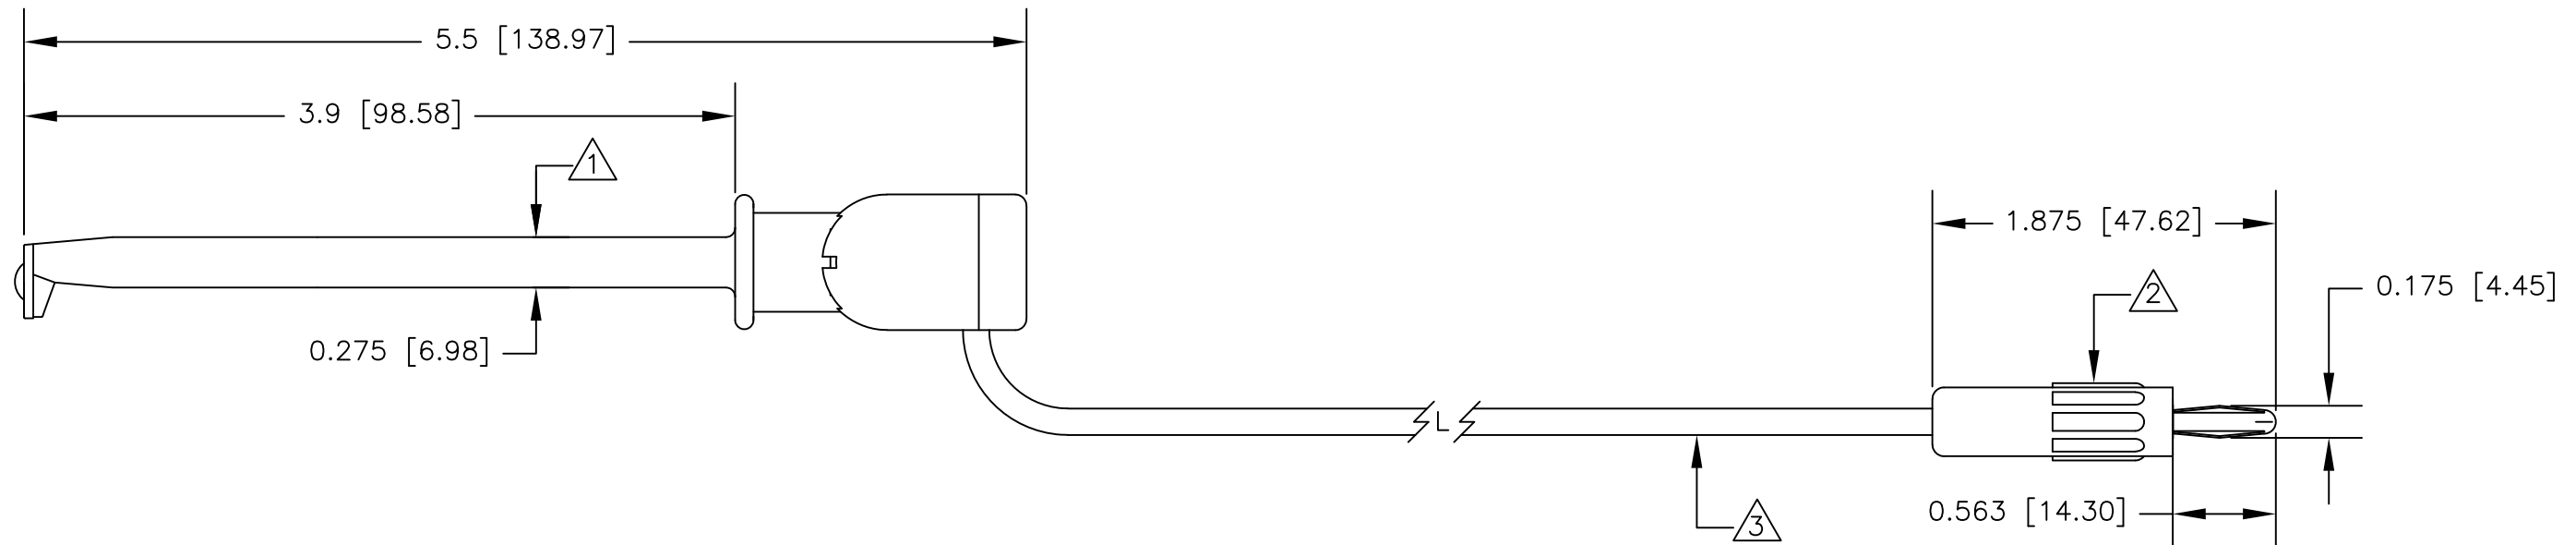

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L	3/15	DESCRIPTION XHL MACROHOOK TO 9214 STD BAN PLUG
		FINISH SEE NOTE.	APPROVED BY		
NEXT ASSY	USED ON				SIZE CODE IDENT NO. DRAWING NO. REV.
					B 08505 BXHL
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1