CONTACT PLATING : gold 0.40 µ over nickel 1 µ .

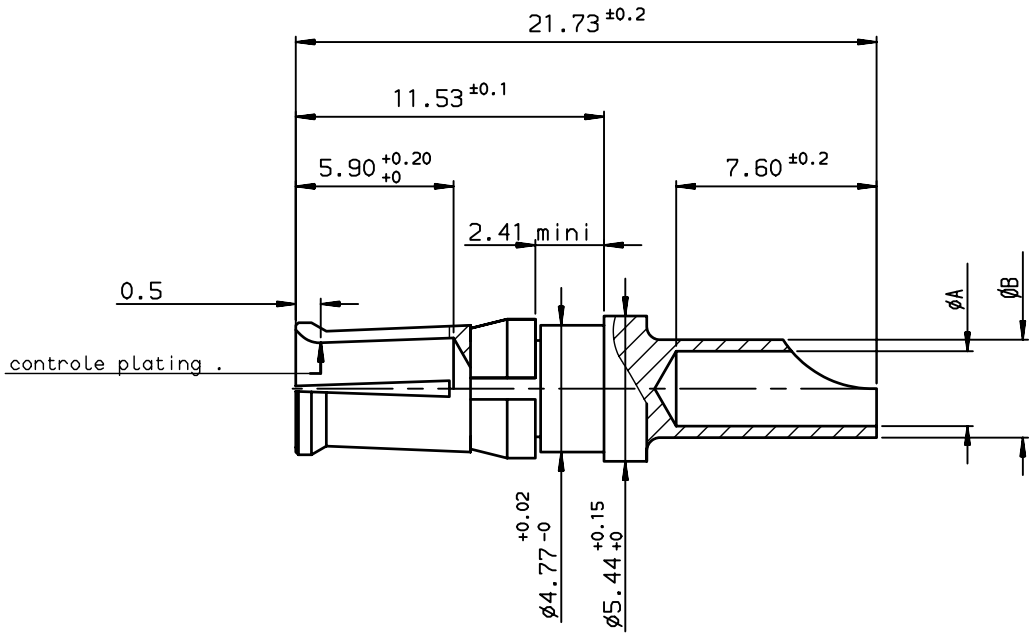

PART NUMBER	Designation	øA +0.10 0	øB ±0.10	WIRE ø ame mm	WIRE Section mm²
8630-3099NLF	Power contact (AWG 8)	4.40	5.00	3.90	8.98
8630-3057NLF	Power contact (AWG 12)	2.80	3.65	2.40	3.18
8630-3061NLF	Power contact (AWG 14)	2.10	3.00	1.70	1.91
8630-3065NLF	Power contact (AWG 16)	1.70	2.60	1.50	1.34

NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intented to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

rev	ecn no	dr	date
A	LS06-0022	MPE	2006/06/11
B	LS06-0095	LGO	2006/06/23
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

European Views

www.fciconnect.com

surface ISO 1302 | tolerance std ISO 406 ISO 1101

TOLERANCES UNLESS OTHERWISE SPECIFIED

projection | mm

Dr	M.PESSON	2006/06/11
Eng	M.PESSON	2006/06/11
Chr	LEGARRE	2006/06/11
Appr	LEGARRE	2006/06/11

ANGULAR 0.XX° ±2° | LINEAR 0.X ±0.1 | 0.XX ±0.1 | 0.XXX ±0.1

size A3 | Scale 5

ECN LS06-0095

Product family D-SUB | Spec ref -

title: POWER CONTACT (taille 8)
removable contact .

catalog no -

dwg no C01-8639-2159 | Rev. B

CUSTOMER | sheet 1 of 1

REV F - 2006-04-17

PDM: Rev:B STATUS: Released Printed: Oct 01, 2010

Copyright FCI.