
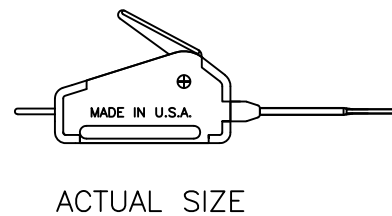
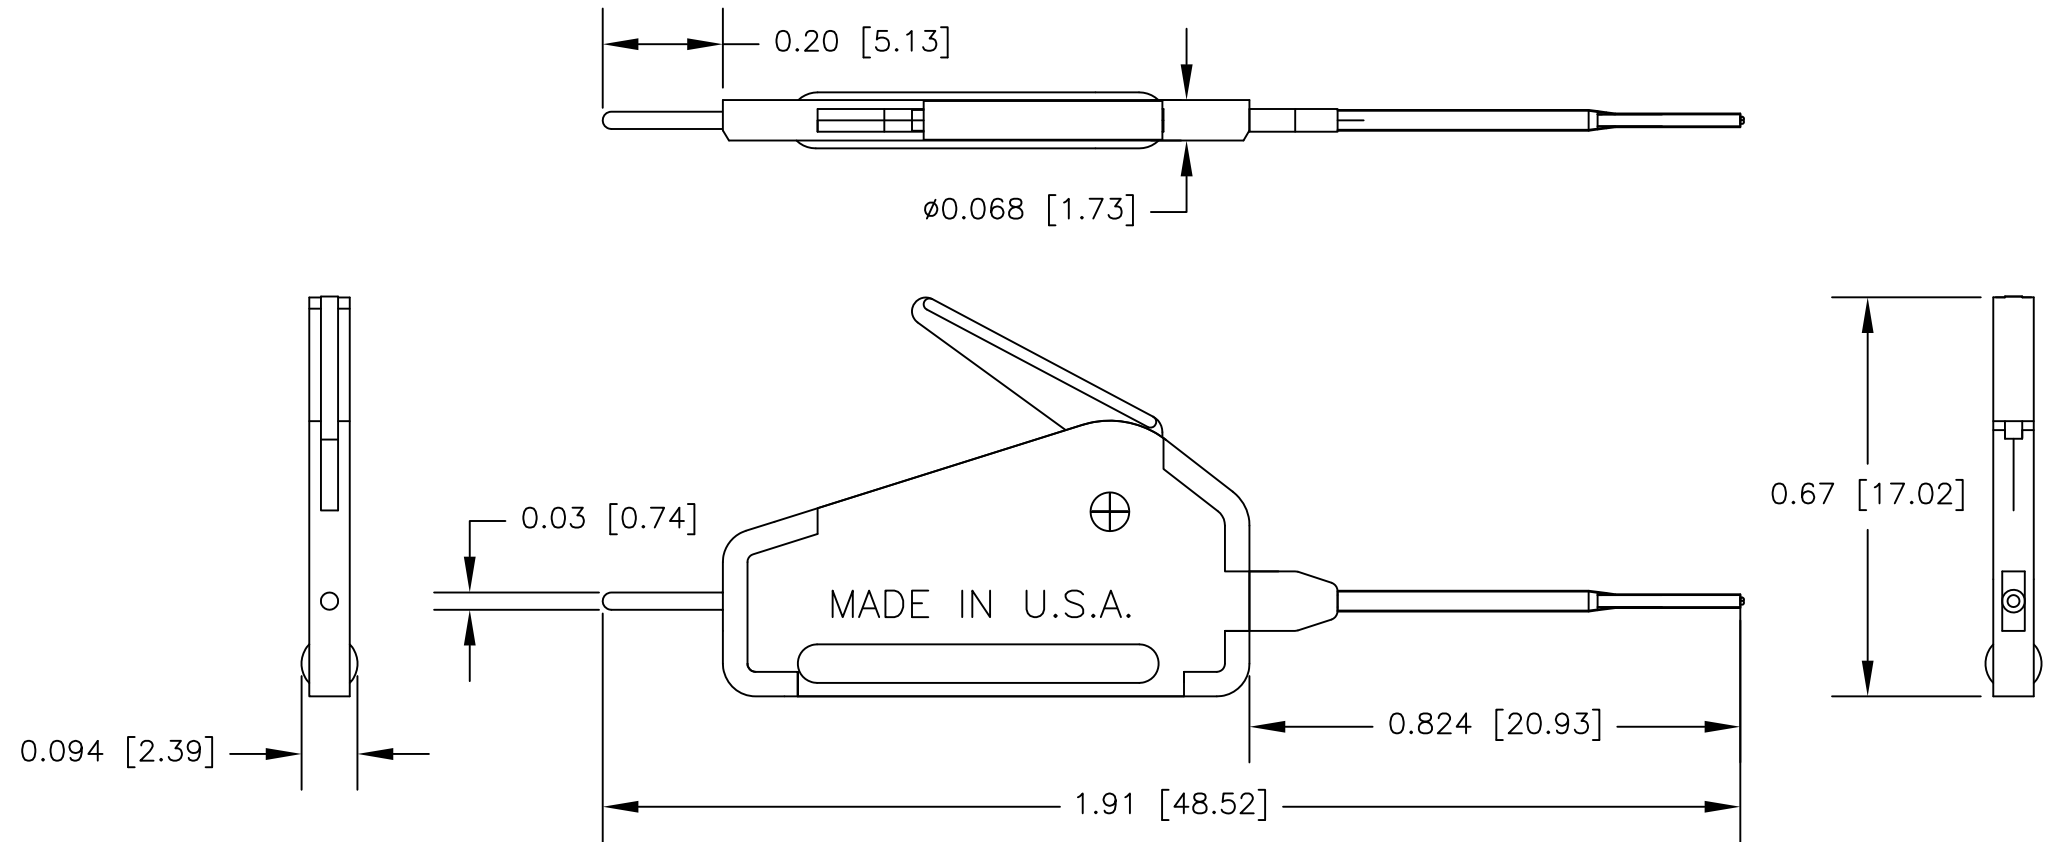


NOTES: UNLESS OTHERWISE SPECIFIED

- CONSTRUCTION:  
 HOUSING: MOLDED NYLON, AVAILABLE IN TEN COLORS  
 SPRING & TUBE: PASSIVATED SS  
 CONTACT: MUSIC WIRE  
 PIN: GOLD PLATED COPPER ALLOY  
 HS: CLEAR POLYESTER
- PERFORMANCE:  
 MAXIMUM CURRENT: 500 mA  
 MAXIMUM VOLTAGE: < 33 VAC < 70VDC  
 MAXIMUM TEMPERATURE: 200°F (93°C)
- FEATURES:  
 THIN CLIP BODY WIDTH ALLOWS MANY PQFP CLIPS TO BE MOUNTED SIDE BY SIDE AND SIMULTANEOUSLY TESTED. USED WITH PQFP PACKAGES TO 0.5MM LEAD PITCH.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

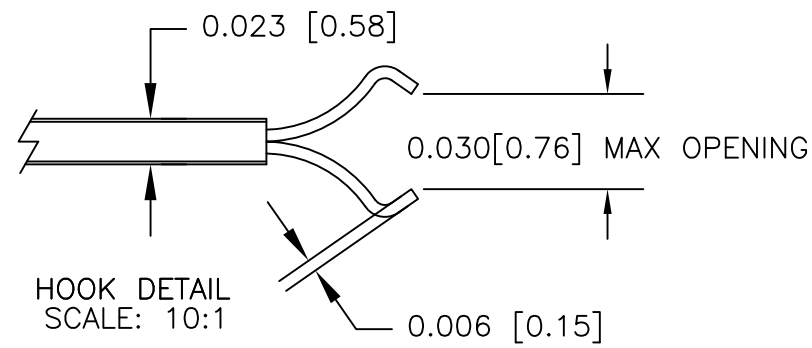

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
			APPROVALS	DATE				
		MATERIAL SEE NOTE.	DRAWN	R.L.	6/15			
			APPROVED BY					
		FINISH SEE NOTE.			DESCRIPTION MICRO DOUBLE HOOK			
NEXT ASSY	USED ON				SIZE	CODE IDENT NO.	DRAWING NO.	REV.
APPLICATION		DO NOT SCALE DRAWING			<b>B</b>	<b>08505</b>	<b>X2015</b>	
					SCALE	3:1	SHEET 1 OF 1	