



Part Number:		DRAWN	10/12/2015	
TD441	.009-1	CJ	10/12/2013	
1744]		CHECKED	5/13/2016	
		P.D		
Description:	ansducer	APPROVED	5/13/2016	
Plezo II		J.S		

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.

Side View



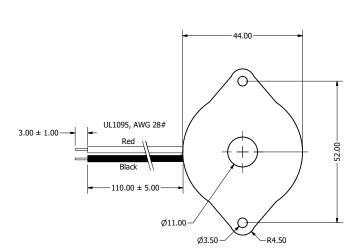

Top View

Items	Specifications	Conditions						
Sound Pressure Level	85	dB (@ 10cm)						
Resonant Frequency	1,000	Hz		REVISION HISTORY				
Rated Voltage	9	V	REV	DESCRIPTION	DATE	APPROVED		
Voltage Range	1 ~ 30	V		Released from Engineering	10/21/2013	J.S.		
Capacitance	68,000	pF (@120Hz)	1	Updated to new template	10/12/2015	J.S.		
Max. Rated Current	3	mA	2	Corrected dimensions	10/24/2015	J.S.		
Storage Temperature	-30 ~ +70	°C		NOTES				
Operating Temperature	-20 ~ +60	°C		All dimensions are in mm unless otherwise noted				
Connection Method	Lead Wires			2) All tolerances are ± 0.5 mm unless otherwise noted				
Mount Type	Flange Mount			3) All parts meet RoHS				
Housing Material	ABS			4) Subject to change or redrawn without notice				
Weight	10	0						