



2.4S7SIC_242004D6UP Series

2.4W - Dual Output - Wide Input - Isolated & Unregulated
SiC dedicated DC-DC converter

DC-DC Converter

2.4 Watt

- ⊕ Efficiency up to 80%
- ⊕ Temperature range: -40°C~+105°C
- ⊕ Dual Output Voltage
- ⊕ Isolation voltage: 3.5kVAC/6kVDC
- ⊕ Short circuit protection (SCP)
- ⊕ RoHS Compliance
- ⊕ Ultra low isolation capacitance
- ⊕ IGBT dedicated regulated DC-DC converter

The 2.4S7SIC_242004D6UP is a DC-DC module power supply designed for IGBT drivers requiring two set of isolation power supply. The mode of mutual connection after two independent outputs is adopted internally for better energy provision of SiC turn-on and turn-off. Output short circuit protection and self-recovery capabilities are also provided. General application includes:

- Universal inverter
- AC servo drive system
- Electric welding machine
- Uninterruptible power supply (UPS)



| Common specifications | |
|--------------------------------|------------------------------------------------------------|
| Short circuit protection: | Continuous, automatic recovery |
| Temperature rise at full load: | 30°C TYP (Ta=25°C) Derating at ≥85°C (see graph) |
| Cooling: | Free air convection |
| Operation temperature range: | -40°C – +105°C |
| Storage temperature range: | -50°C – +105°C |
| Lead temperature | 300°C MAX, 1.5mm from case for 10 sec |
| Storage humidity range: | < 95% |
| Case material: | Black flame-retardant and heat-resistant plastic [UL94-V0] |
| MTBF: | >3,500,000 hours |
| Weight: | 4.3g |
| Dimensions: | 19.50*9.80*12.50mm |

| EMC specifications | | |
|--------------------|-----|----------------------------------------------------------|
| EMI | CE | CISPR22/EN55022 CLASS B (see EMC recommended circuit) |
| EMI | RE | CISPR22/EN55022 CLASS B (see EMC recommended circuit) |
| EMS | ESD | IEC/EN61000-4-2 Contact ±6KV perf. Criteria B |

| Input specifications | | | | | | |
|----------------------|----------------|------|-----|-----|-------|--|
| Item | Test condition | Min | Typ | Max | Units | |
| Input surge voltage | | -0.7 | | 18 | VDC | |
| Hot plug | Unavailable | | | | | |
| Input filter | Capacitor | | | | | |

Example:
2.4S7SIC_242004D6UP
2.4 = Watt; S7 = SIP7; SIC = SiC Series; 24 = 24Vin; 20 = +20Vout;
04 = -4Vout; D = Dual Output; 6 = 6kVDC; U = Unregulated;
P = Short Circuit Protection (SCP)

| Output specifications | | | | | | |
|-------------------------------|------------------------------------------------------|------|------|-------|-------|--|
| Item | Test condition | Min | Typ | Max | Units | |
| Output voltage | +Vo: Vin= 12VDC, Pin6 & Pin7 +Io=+100mA | 19.6 | 20 | 20.4 | VDC | |
| | -Vo: Vin= 12VDC, Pin5 & Pin6 -Io=-100mA | -3.7 | -3.9 | -4.1 | VDC | |
| Output voltage accuracy | See tolerance envelope graph | | | | | |
| Line regulation | Input voltage change: ±10% | | ±1.1 | ±1.3 | % | |
| Load regulation | 10% to 100% load • 20VDC output • -4VDC output | | | 8 | % | |
| | | | | 13 | % | |
| Ripple & Noise* | 20MHz Bandwidth • Ripple • Noise | | 60 | | mVp-p | |
| | | | 75 | | mVp-p | |
| Temperature drift coefficient | 100% load | | | ±0.03 | %/°C | |
| Switching frequency | Full load, nominal input | | 100 | | KHz | |

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at DC-DC application notes.

| Isolation specifications | | | | | | |
|--------------------------|---------------------------------------------------------------------|------|-----|-----|-------|--|
| Item | Test condition | Min | Typ | Max | Units | |
| Isolation voltage | Input-Output, tested for 1 minute and leakage current less than 1mA | 3500 | | | VAC | |
| | | 6000 | | | | |
| Isolation resistance | Input-Output, test at 500VDC | 1000 | | | MΩ | |
| Isolation capacitance | Input/Output, 100KHz/0.1V | | 3.5 | | pF | |

| Part Number | Input Voltage (Range) [V] | Input current, no load [mA, typ] | Output Voltage [VDC, +Vo/-Vo] | Output current [mA, +Vo/-Vo] | Max. capacitive load [μF] | Efficiency [%, typ] |
|---------------------|---------------------------|----------------------------------|-------------------------------|------------------------------|---------------------------|---------------------|
| 2.4S7SIC_242004D6UP | 24 (21.6-26.4) | 20 | +20/-4 | +100/-100 | 220 | 75/80 |

2.4S7SIC_242004D6UP Series

2.4W - Dual Output - Wide Input - Isolated & Unregulated
SIC dedicated DC-DC converter

Temperature Derating Curve

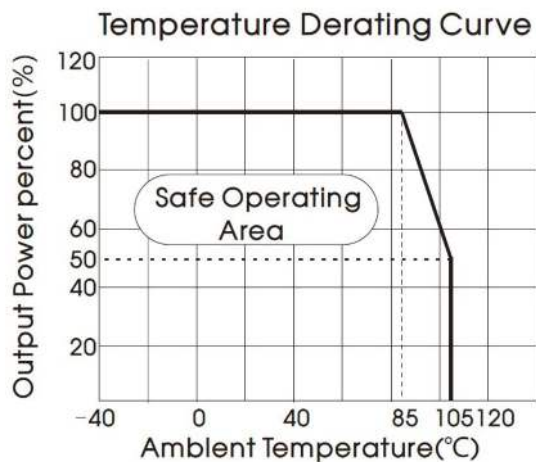


Fig. 3

Efficiency

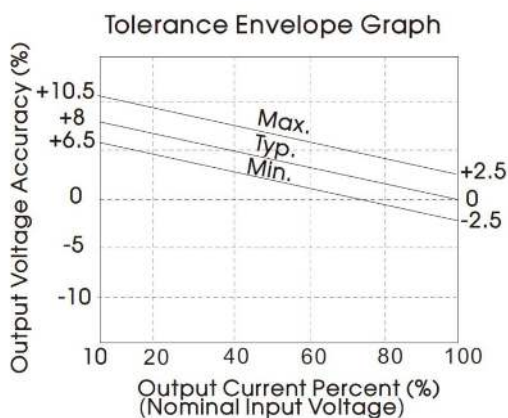


Fig. 1 Positive Output Voltage Tolerance Envelope Graph

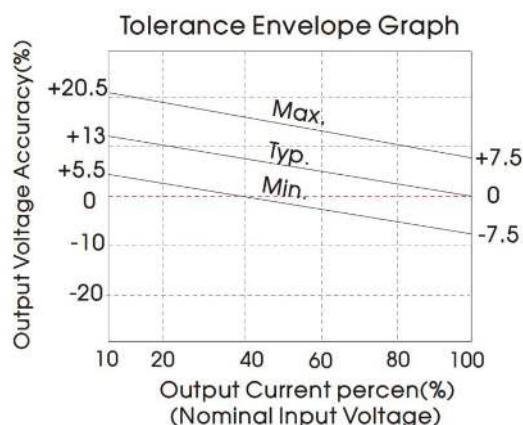


Fig. 2 Negative Output Voltage Tolerance Envelope Graph

Overload protection

In normal operating conditions, the circuit of these products have no overload protection. Protect with a breaker is a simple way to make overload protection.

Test configurations




Note: C1,C2,C3: 100uF/35V (Low impedance)

2.4S7SIC_242004D6UP Series

2.4W - Dual Output - Wide Input - Isolated & Unregulated
SIC dedicated DC-DC converter

EMC solution-recommended circuit

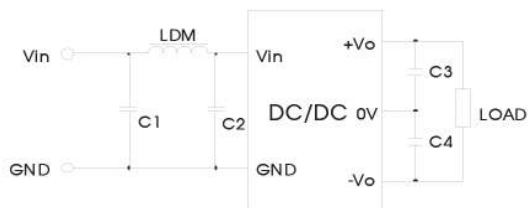



| | | |
|-----|-------|-----------------------------------------------------------|
| EMI | C1/C2 | 4.7 μ F /50V |
| | C3/C4 | 100 μ F /35V (Low internal resistance capacitance) |
| | LDM | 6.8 μ H |

The product does not support output in parallel with power per liter or hot-swappable use.


It is not allowed to connect modules output in parallel to enlarge the power.

Mechanical dimensions

THIRD ANGLE PROJECTION

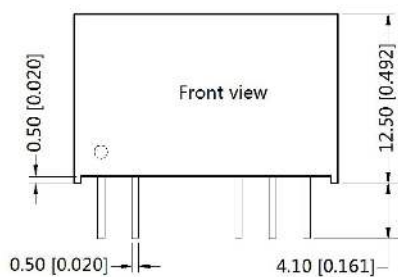

Note: Grid 2.54*2.54mm

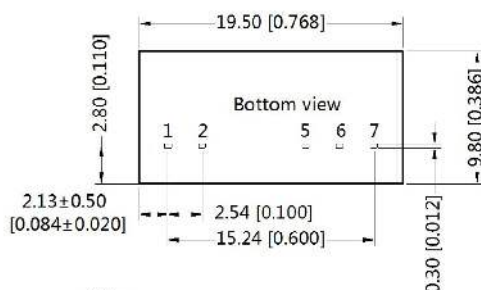

| Pin-Out | |
|---------|----------|
| Pin | Function |
| 1 | Vin |
| 2 | GND |
| 5 | -Vo |
| 6 | 0V |
| 7 | +Vo |

Note:
Unit :mm[inch]
Pin section tolerances:±0.10[±0.004]
General tolerances:±0.25[±0.010]

Note:

- The lead connecting the power supply module and IGBT driver should be as short as possible during use;
- The output filtering capacitor should be as close as possible to the power supply module and SIC driver;
- The peak of the MOSFET SIC driver gate drive current is high, so low internal resistance electrolytic capacitor is recommended to be used for the power supply module output filter capacitor;
- The average output power of the driver must be lower than that of the power supply module;
- Consider fixing with glue near the module if being used in vibration occasion;
- The max. capacitive load should be tested within the input voltage range and under full load conditions;
- Unless otherwise noted, all specifications are measured at $T_a = 25^\circ\text{C}$, humidity <75%, nominal input voltage and rated output load.
- In this datasheet, all test methods are based on our corporate standards.
- All characteristics are for listed models, and non-standard models may perform differently. Please contact our technical support for more detail.
- Please contact our technical support for any specific requirement.
- Specifications of this product are subject to changes without prior notice.