



Part Number	Cable OD Range					
MC3CG-S4	17.0~19.0 mm					
MC3CG-S5	19.0~21.0 mm					
MC3CG-S6	21.0~23.0 mm					
MC3CG-S7	23.0~25.5 mm					

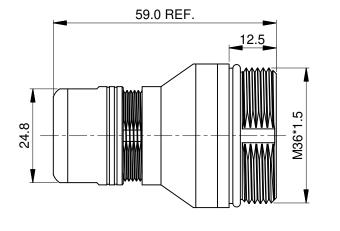




M40C,CORD GRIP

MC3CG-Sx

REV: **B2** SH:

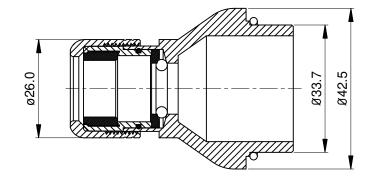

Part Number	Cable OD Range				
MC3CG-S1	10.0~12.0 mm				
MC3CG-S2	12.0~14.0 mm				
MC3CG-S3	14.0~17.0 mm				

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

EMI SHIELDING RING: STAINLESS STELL

SEAL: EPDM

HOUSING BODY: ZINC DIE CAST, NICKEL PLATED

2. SPECIFICATIONS:

2.1 DEGREE OF PROTECTION: IP67 ( MATED CONDITION )

2.2 RoHS COMPLIANT

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

	SEE PAR	INUMBER	Т				유	
CHART								
QUANTITY	PART	ÍÜMBER		DESCRIPTION			-	
MATERIALS LIST								
	All dimensions are in metric(mm).		RES	DATE	Amphonol		1	
2) Tolerances are a 1 PL DEC ±0.30	s follows:    Fractions ±1/64   CHECK	Drack Drack	Ju	un.27,2015	Amphenol			
2 PL DEC ±0.15 3 PL DEC ±0.08		CHECKED:			Sine Systems - www.amphenol-sine.com	_	1	
3) Note reference		ENGINEER:			44724 Morley Drive			
		ADDDOVAL.			Clinton Township, MI 48036	Į.	1	

MATERIAL SPECIFICATIONS

OCCESS OFFICIATIONS	THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES.	M40C,CORD GRIP						
ROCESS SPECIFICATIONS:	SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAI	B	C-	MC3CG	-Sx			B2
		SCALE: N	ONE		SHEET	1	OF	1