


- NOTES:**
- MATERIALS:**
    - HOOD, GLAND, COMPR.-RING: ABS UL94 V-0 METALLIZED
    - FRONTSEALING: SILICONE VMQ BLUE
    - CABLE SEALING: NBR BLACK
    - JACK-SCREW: STAINLESS STEEL
    - O-RING: NBR BLACK
    - CABLE STRAIN RELIEF: STEEL, NI-PLATED
    - SCREWS: STEEL, NI-PLATED
    - SHIELDING BRACKET: CU-ALLOY, NI-PLATED
  - TEMPERATURE RANGE: -30°C TO +80°C
  - RECOMMENDED TORQUE FOR SCREW:
    - 35Ncm (3.1 in.LB)
    - MAX. TORQUE: 68Ncm (6 in.LB)
  - SINGLE PACKED

\* COMPLETELY TIGHTENED

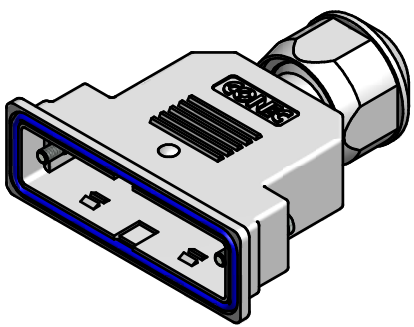

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance			dim. in mm	scale: 1,5:1 (1:1)		
	±0,3 unless otherw. specified				material: SEE NOTES		
	1 x b	Ä 5093	12.03.14	Heinrich	drawn	07.02.2014	title:
	a	Origin			appd.	07.02.2014	WATER RESISTANT D-SUB HOOD SHIELDED 25 POS.
	rev.	description	date	name	norm		SHORT SCREW 4-40UNC STAINLESS STEEL
				d-old	15K1A1155	dwg no:	
						15K1A1444	
						part no:	15-004830
						DIN-A3	
						sh: 1	