1766663-2 - ACTIVE

ICCON

TE Internal #: 1766663-2 Power Contacts, Contact, 250 VAC, 250 VDC, Silver, Printed Circuit Board, Power, Pin, -40 – 105 °C [-40 – 221 °F], Copper Alloy, Bright, ICCON

View on TE.com >

Connectors > Power Connectors > Power Contacts



Power Contact Type: Contact Operating Voltage: 250 VDC Contact Mating Area Plating Material: Silver Connector & Contact Terminates To: Printed Circuit Board

Features

Product Type Features

Power Contact Type

Connector & Contact Terminates To

Electrical Characteristics

Operating Voltage



Contact

Printed Circuit Board

250 VDC

Contact Features

Contact Fabrication	Solid
PCB Contact Termination Area Plating Material Thickness	5.08 – 7.62 μm[200 – 300 μin]
PCB Contact Termination Area Plating Material	Silver
Contact Mating Area Plating Material	Silver
Contact Current Rating (Max)	35 A
Contact Type	Pin
Contact Retention Within Housing	Without
Mating Pin Diameter	3.17 mm[.125 in]
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material Thickness	5.08 μm[200 μin]
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	50 μm[1.27 μin]

1766663-2

Power Contacts, Contact, 250 VAC, 250 VDC, Silver, Printed Circuit Board, Power, Pin, -40 – 105 °C [-40 – 221 °F], Copper Alloy, Bright, ICCON



Termination Features

Termination Method to Printed Circuit Board	Through Hole - Screw
Usage Conditions	
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Rating	Recognized
Agency/Standard	UL
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	200
Packaging Method	Box & Tray, Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.7% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part


1766663-2

Power Contacts, Contact, 250 VAC, 250 VDC, Silver, Printed Circuit Board, Power, Pin, -40 – 105 °C [-40 – 221 °F], Copper Alloy, Bright, ICCON



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Also in the Series | ICCON

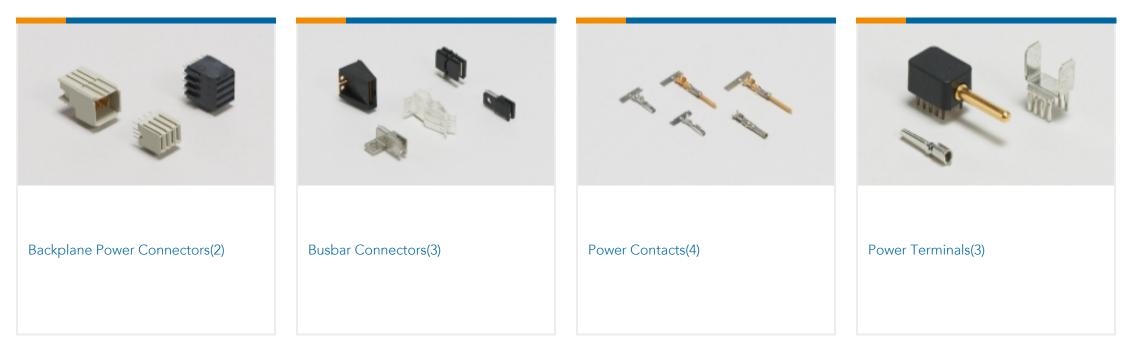



Rectangular Power Connectors(15)

Customers Also Bought

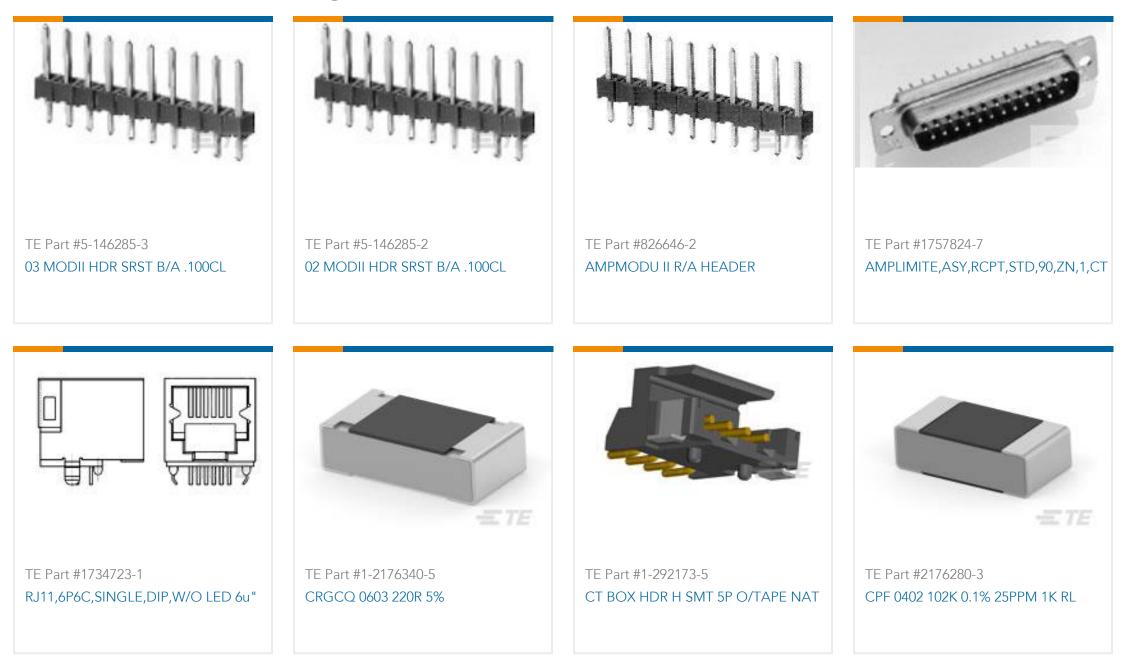

Documents

1766663-2

Power Contacts, Contact, 250 VAC, 250 VDC, Silver, Printed Circuit Board, Power, Pin, -40 – 105 °C [-40 – 221 °F], Copper Alloy, Bright, ICCON



Product Drawings ICCON PIN, 18MM, M3.5 EXT THREAD

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1766663-2_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1766663-2_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1766663-2_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages POWER_CONNECTORS_CATALOG_SEC01_BOARD_TO_BOARD

English

2_PIECE_POWER_CONNECTORS_qrg_4-1773458-1

English

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English