
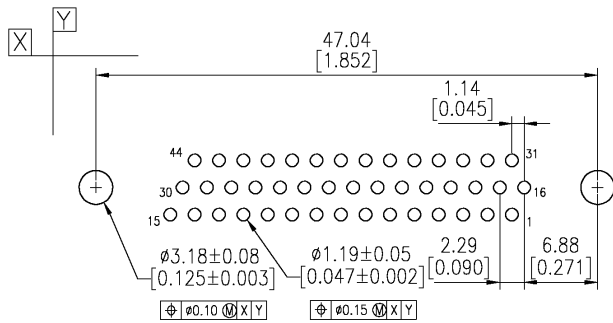


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
GP	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		J		REVISED PER OS13-0210-02	11JULY02	JB	CC

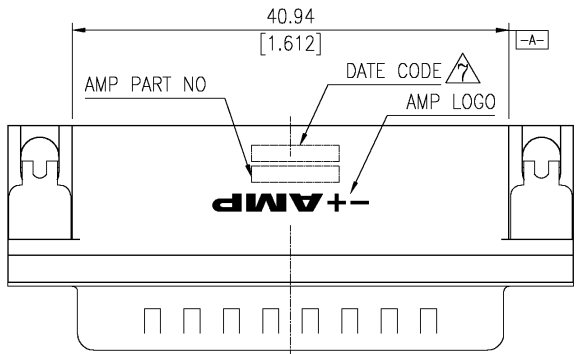




MATERIAL:

- Housing: PBT , 30 % G.F polyester, Black. (UL 94V-0 Rated)
 - Contact: Brass.
 - Contact Plated: Gold Plated over 50u" Nickel underplated.
 - Solder Tail: Sn/Pb Plated 120u" over 50u" Nickel underplated.
 - Shell: Steel, Nickel Plated.
 - Boardlock: Brass, Tin or Sn/Pb Plated 100u"
- △ Four digit date code in this format.

Year 01 45 Manufacturing Week

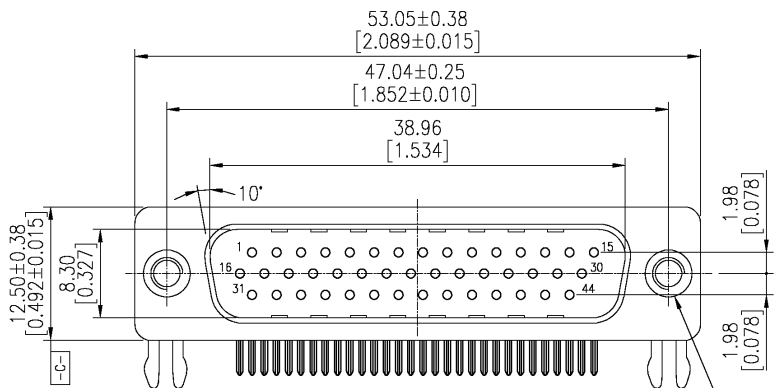

SEE TABLE FOR MOUNTING FLANGE CONFIGURATION

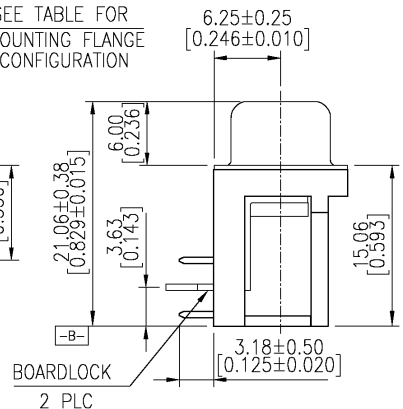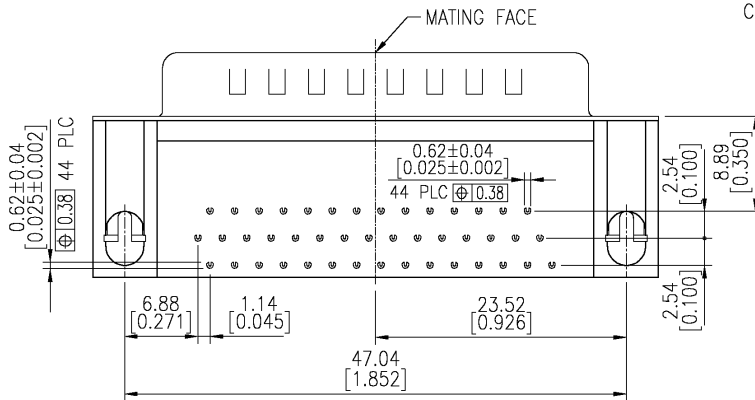

Tray	Detail B	Gold flash	749771-3
Tray	Detail B	15 μ"	749771-2
Tray	Detail B	30 μ"	749771-1
Packaging	Mounting Flange	Contact Finish	AMP Part NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: J. BURWELL	11JULY02	Tyco Electronics	Tyco Electronics Corporation			
CHK: C. CASH	11JULY02		AMPLIMITE HD-22 44 POS PLUG, RIGHT ANGLE			
DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC:	SIZE: A2	CAGE CODE: 00779	DRAWING NO: 749771	RESTRICTED TO:
0 PLC ± -	1 PLC ± 0.30	APPLICATION SPEC:	WEIGHT:	SCALE: 3:1	SHEET: 1 OF 1	REV: J
2 PLC ± 0.20	3 PLC ± 0.10	MATERIAL:	CUSTOMER DRAWING			