

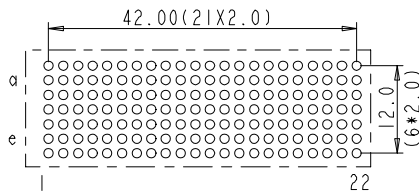



Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

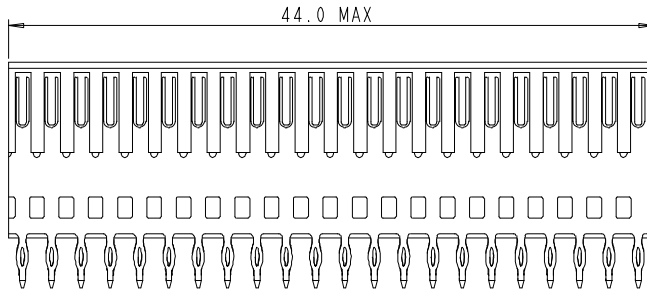

All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

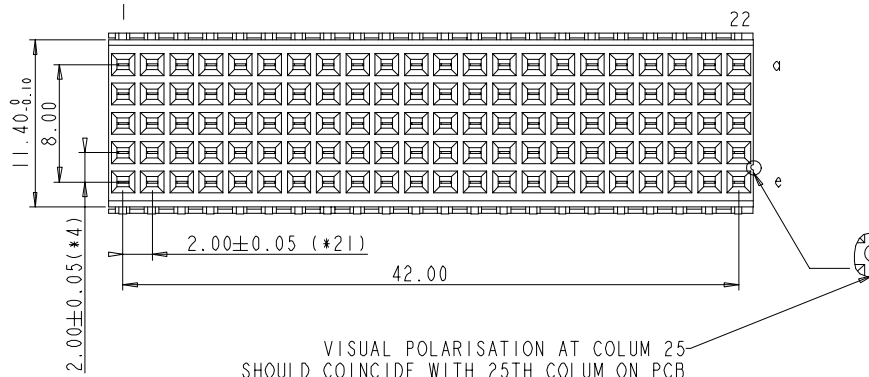

LAY-OUT
P.C.B. -HOLE
(FRONT SIDE)



PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES

- 1. " " LEAD FREE INDICATOR : LF=LEAD FREE
" " PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
- 2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-09-01
B	104-0109	ALEX E	27-11-04
C	DG05-0278	Mason	02-08-05
D	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-
-	-	-	-

Material			Spec ref		
Mat code			✓	tolerance	projection
Heat treat				1 DEC ±0.2 1 DEC 2 DEC ±0.1 2 DEC ANGLE ±1° HOEKEN	
Plating/Finish			size A4		Scale 2.000
Dr	M.Fret	03-08-99	Product family MILLIPICS		ECN
Eng				Model Name	
Chr				Model Revision	
Appr				REL Level	
			title MILLIPACS 2 / TYPE B / SHIELDED		dwg no BSC201907020
Pro/E file			catalog no	HM2S70PE5101----	CUSTOMER DRAWING
					Rev. D
					sheet 1 of 1