

S20KAC-P06MCC0-300S





General information

| Part number | S20KAC-P06MCC0-300S | |
|-------------------|---------------------|---------------------------|
| Termination | solder | |
| Size | 0 | |
| Locking principle | push | Come of the family of the |
| Coding | a_key | |
| Cable Diameter | cable mini 30 | |
| Cable outlet | bend relief | |

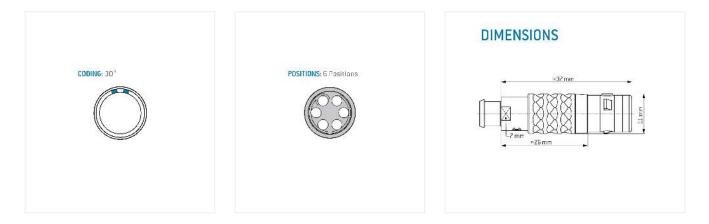

Contact insert description

| Number of contacts | 6 |
|----------------------|--------|
| Contact type | pins |
| Contact diameter | 05mm |
| Insulator material | peek |
| Wire cross section | 28_awg |
| Termination | solder |
| Termination diameter | 04mm |

reverse_gender_on_request

Technical information

| Max. creepage and air clearance distance | 07_mm | 07_mm |
|--|----------|---------------|
| Nominal current single contact | 04_a | iec_60512_5_2 |
| Nominal current insert | 3 A | vde_0298_4 |
| Test voltage | 09_kv_ac | sae_13441 |

safety_text

Mechanical and environmental data

| Degree of protection* | ip68 | |
|-----------------------|----------|--|
| Operating temperature | 40_120_c | |
| Mating cycles | 5000 | |
| mated | | |

Material and surface treatments

| Housing | m_chrome |
|---------|----------------------------|
| Contact | cu [_] alloy_gold |

safety_text_2 ul_text illustrative_text