


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00090	Connector, dc plug, 6.5x3.0x24 mm, molding style	1	
2	30-00395	Wire, 2C TS, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC	1	
3	24-00259	Overmold, 90°, 6.5 mm, dc plug	1	black

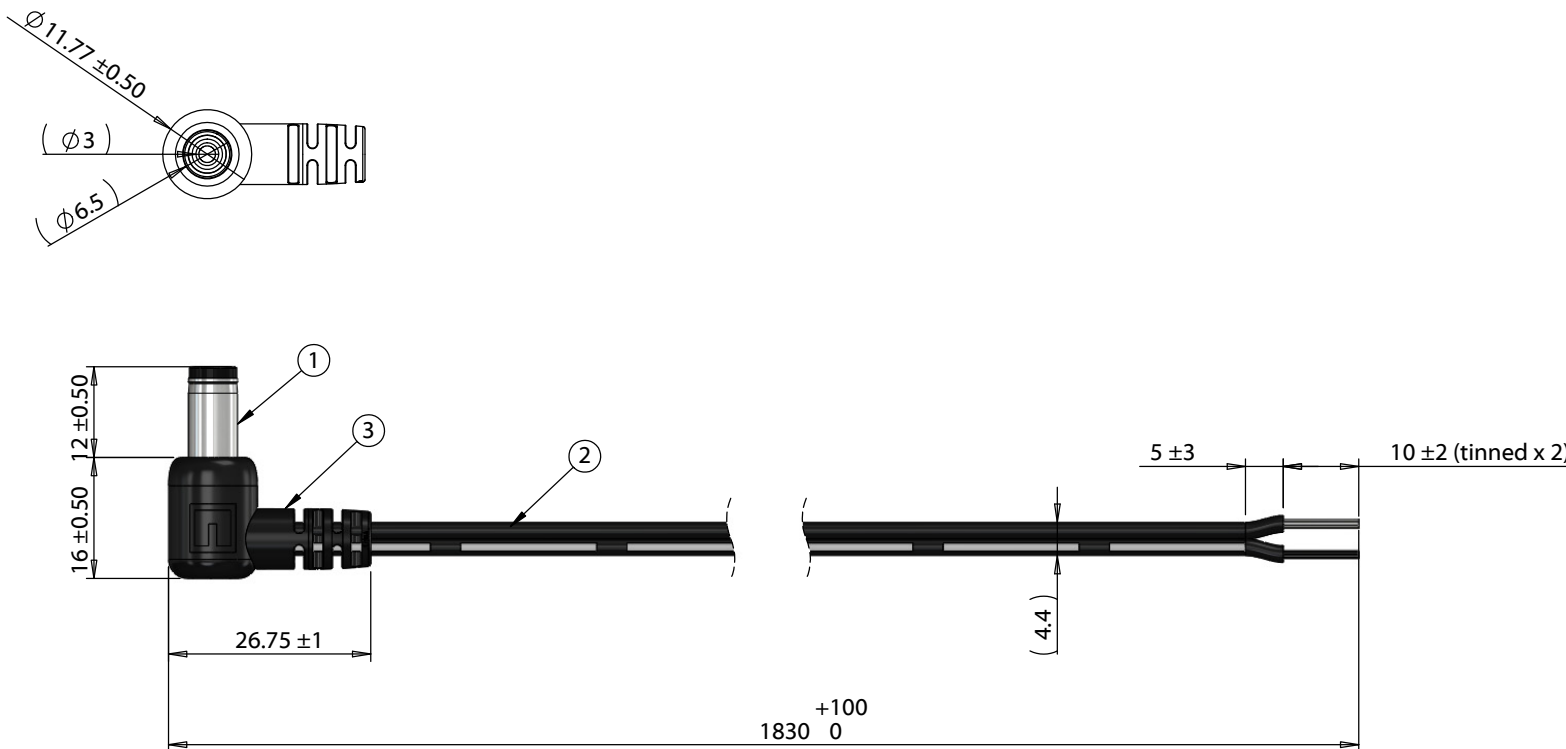

**Notes:**  
Functionally equivalent components may be substituted

Wiring Diagram	
50-00090	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared: RS <small>Digitally signed by RS Date: 2019.05.15 11:54:33 -07'00'</small>	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	11/20/2017	Initial release	Verified: JP <small>Digitally signed by JP Date: 2019.05.15 12:00:22 -07'00'</small>	RoHS compliant	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
				Description: Cable, 1830 mm, 6.5x3.0x12 mm 90° 50-00090 dc plug to 10 mm tinned, 18 AWG, UL2468, 30-00395 wire	
				Size:	Part number:
				A	10-02505
				Scale: 1:1	Sheet 1 of 1

5

4

3

2

1