THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	T	EC 0G3C 0734 04	17DEC04	BSV	JLG
	T1	REVISED PER ECO-09-020932	25AUG09	KK	AEG

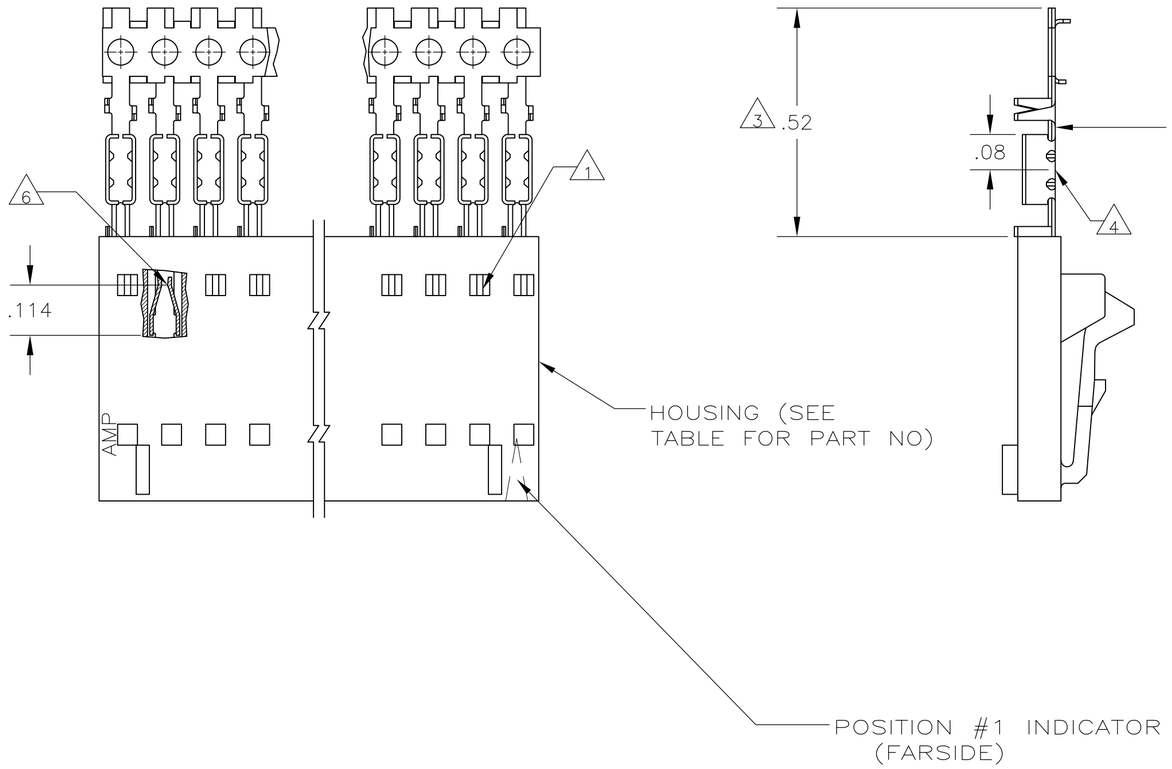

2 CONTACT IDENTIFICATION LETTER "A" (LOCATED IN THIS AREA)

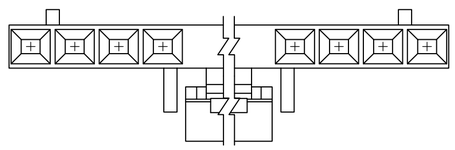

9 OBSOLETE	8	2-104257-4	25	7-103640-4
	8	2-104257-3	24	7-103640-3
	8	2-104257-2	23	7-103640-2
	8	2-104257-1	22	7-103640-1
9 OBSOLETE	8	2-104257-0	21	7-103640-0
	8	1-104257-9	20	6-103640-9
	8	1-104257-8	19	6-103640-8
	8	1-104257-7	18	6-103640-7
	8	1-104257-6	17	6-103640-6
	8	1-104257-5	16	6-103640-5
	8	1-104257-4	15	6-103640-4
9 OBSOLETE	8	1-104257-3	14	6-103640-3
	8	1-104257-2	13	6-103640-2
	7	2-104257-4	25	2-103640-4
	7	2-104257-3	24	2-103640-3
	7	2-104257-2	23	2-103640-2
9 SUPERSEDED	7	2-104257-1	22	2-103640-1
	7	2-104257-0	21	2-103640-0
9 OBSOLETE	7	1-104257-9	20	1-103640-9
	7	1-104257-8	19	1-103640-8
	7	1-104257-7	18	1-103640-7
	7	1-104257-6	17	1-103640-6
	7	1-104257-5	16	1-103640-5
9 SUPERSEDED	7	1-104257-4	15	1-103640-4
9 OBSOLETE	7	1-104257-3	14	1-103640-3
	7	1-104257-2	13	1-103640-2
SUPERSEDED BY 1-103960-1		1-104257-1	12	1-103640-1
SUPERSEDED BY 1-103960-0		1-104257-0	11	1-103640-0
SUPERSEDED BY 103960-9		104257-9	10	103640-9
SUPERSEDED BY 103960-8		104257-8	9	103640-8
SUPERSEDED BY 103960-7		104257-7	8	103640-7
SUPERSEDED BY 103960-6		104257-6	7	103640-6
SUPERSEDED BY 103960-5		104257-5	6	103640-5
SUPERSEDED BY 103960-4		104257-4	5	103640-4
SUPERSEDED BY 103960-3		104257-3	4	103640-3
SUPERSEDED BY 103960-2		104257-2	3	103640-2
SUPERSEDED BY 103960-1		104257-1	2	103640-1
	PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER

1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS

2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS

3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE

4 POINT OF MEASUREMENT FOR PLATING THICKNESS

5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103960

6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)

7 CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL

8 CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL

9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± .02
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL : HOUSING-FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK
CONTACTS- PHOS BRONZE

FINISH: SEE TABLE

DWN	L A MAYER	11-4-86
CHK	P de Jong	11-12-86
APVD	P de Jong	11-12-86
PRODUCT SPEC	108-25034	
APPLICATION SPEC	114-25026	
WEIGHT	-	

Tyco Electronics
Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME: RCPT ASSY, AMPMODU MTE, SINGLE , LATCHED & POLARIZED, FOR #26-#30 AWG WIRE SIZE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-103640	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV T1

103640