
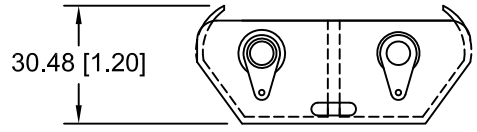
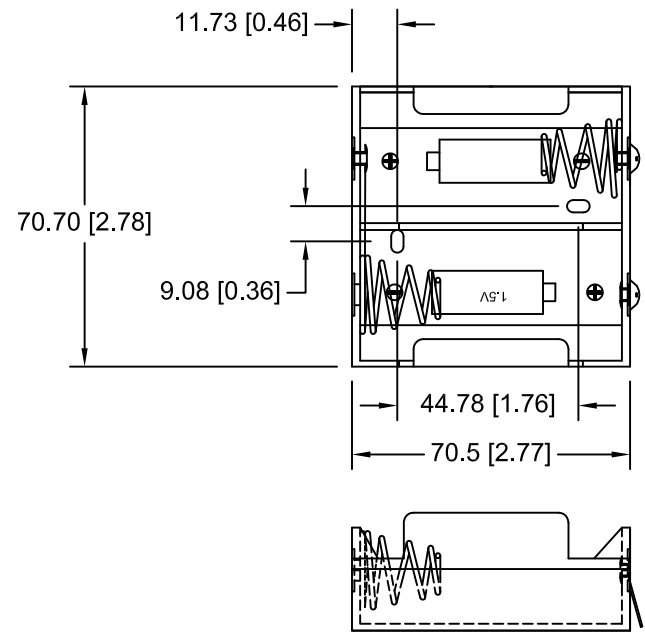



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
9/05/14	D	REDRAWN IN AUTOCAD UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
4/07/17	E	ADDED MOUNTING HOLE DETAIL	T.B.	B.S.	

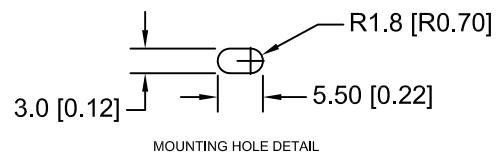

NOTES:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 RIVETS: BRASS, NICKEL PLATED.
 SPRING: SPRING STEEL, NICKEL PLATED.
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER
 EIA-540J000
 ROHS 2 COMPLIANT.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
		decimal	Scale
±.5 (.020)		Drawn By	B.S.
		Approved By	T.B.
Fractional	Title		
± .8 (.030)	TWO "D" CELL HOLDER WITH SOLDER LUGS		
Angular	Date	Drawing Number	
± 3°	04/07/17	BH2DL	