
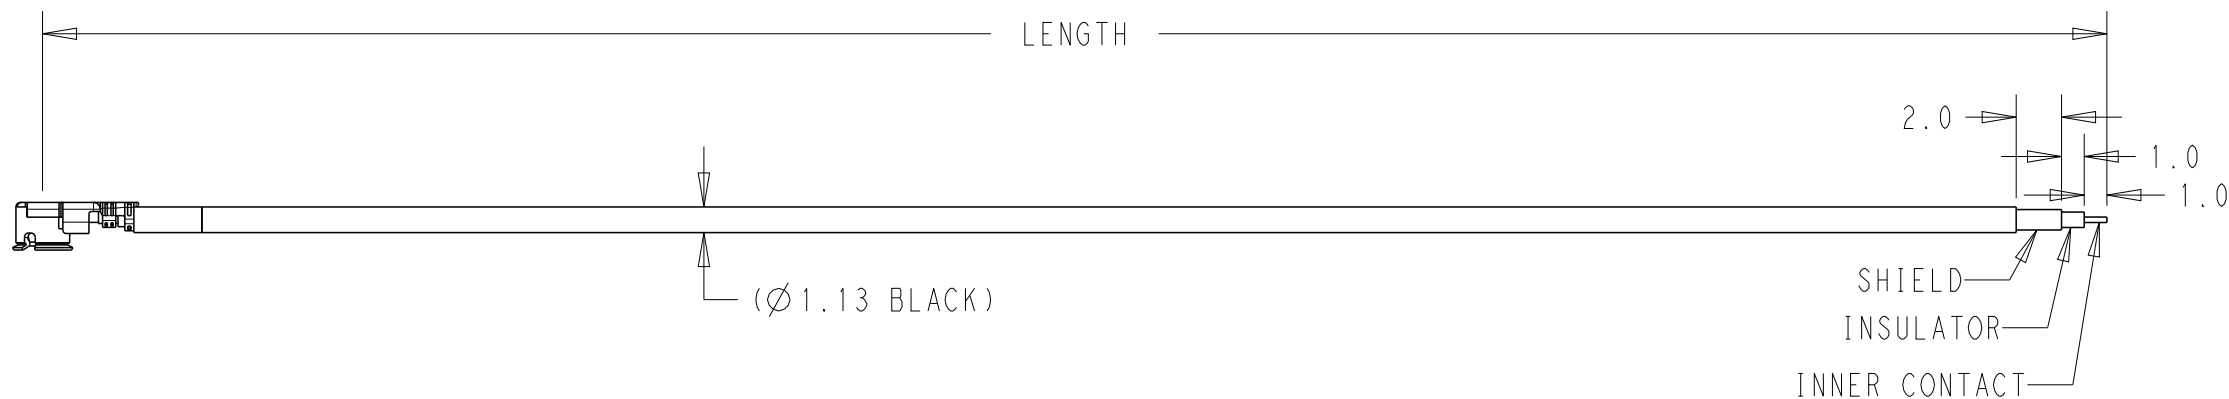


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	GTP ECN-22-147784	11APR2022	JZ	WKH

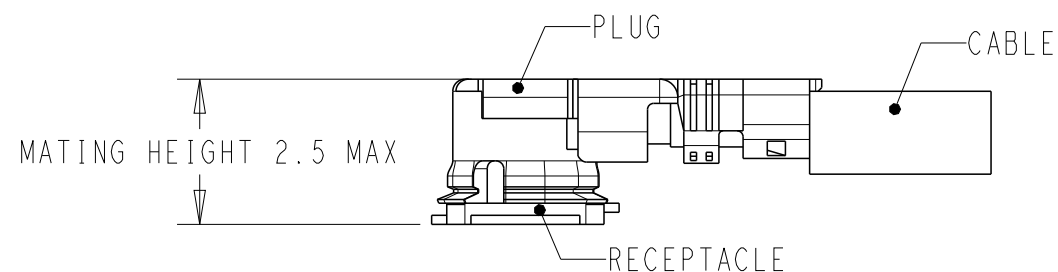

- NOTES:
- PARTS AND PROCESSES RoHS COMPLIANT PER TE CONNECTIVITY STANDARD TEC-138-702.
 - PRODUCT RATING:
 CHARACTERISTIC IMPEDANCE: 50 OHMS Normal
 FREQUENCY RANGE: DC TO 9GHz
 - CABLE ASSEMBLY TO BE 100% OPEN & SHORT TESTED
 - UMCC GEN1 CAN MATE WITH I-PEX MHF1 SERIES AND HIROSE U.FL SERIES

1-2148999-0	500±5
2148999-9	450±5
2148999-8	400±5
2148999-7	350±5
2148999-6	300±5
2148999-5	250±5
2148999-4	200±3
2148999-3	150±3
2148999-2	100±3
2148999-1	50±3
P/N	LENGTH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JZ	01DEC2021		
		CHK WKH	01APR2022		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.1 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		NAME RF CA, UMCC GEN1- PIGTAIL STRIPPED WITH 1.13MM CABLE	
		PRODUCT SPEC 108-2231		APPLICATION SPEC -	
MATERIAL -		FINISH -		WEIGHT -	
CUSTOMER DRAWING				SIZE A3	CAGE CODE 00779
SCALE 8:1				DRAWING NO C-2148999	RESTRICTED TO -
SHEET 1 OF 1				REV A	