

TX6A™ 10Gig UTP Copper Cable: Standard Compliant Plus

specifications

Category 6A/Class E_A cable shall be constructed of 23 AWG copper conductors with FEP Plenum (CMP) insulation. The copper conductors shall be twisted in pairs. All four pairs shall be surrounded by a metallic barrier and a flame retardant jacket. The barrier tape shall minimize the cable diameter and suppress the effects of alien crosstalk. The small cable diameter shall maximize cable density such that existing pathways can be utilized when upgrading from Category 6 cabling.



**TX6A™ 10Gig UTP
Copper Cabling System**

**TX6A™ 10Gig UTP Copper Cable:
Standard Compliant Plus**

Plenum (CMP): PUP6XHD04*-G

*To designate color, add suffix BU (Blue), WH (White), IG (International Gray), or YL (Yellow). For additional cable colors, contact customer service.

technical information

| | |
|---|---|
| Category 6A/Class E_A channel and component performance: | Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E _A standards swept up to 650 MHz for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the Panduit® TX6A™ 10 Gig UTP Copper Cabling System Certified component performance up to 100 meters and exceeds the ANSI/TIA-568.2-D Category 6A and IEC 61156-5 Category 6A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems |
| Standards compliance: | UL Listed CMP-LP (0.7A) |
| Cable diameter: | Plenum (CMP): 0.230 in. (5.8mm) nominal |
| Conductors/insulators: | 23 AWG solid copper insulated with FEP (CMP) |
| Flame rating: | Plenum (CMP): NFPA 262 |
| PoE/PoH compliant: | Meets IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt for PoE applications UL PoH certified per UL4299 |
| Installation tension: | 25 lbf (110 N) maximum |
| Temperature rating: | 32°F to 140°F (0°C to 60°C) during installation -4°F to 221°F (-20°C to 105°C) during operation |
| Cable jacket: | Plenum (CMP): Flame retardant PVC |
| Cable weight: | 30.0 lbs./1000 ft. (13.6 kg/305m) |
| Packaging: | 1000 ft. (305m) on a reel 34.0 lbs./1000 ft. (15.4 kg/305m) Package tested to ISTA procedure 1A |

key features and benefits

| | |
|---|--|
| Headroom warranty | Provides worst-case margins above the industry standard for both electrical and alien crosstalk performance |
| High density cable design | Improves fill capacity, cable management, reduces required bend radius and allows efficient use of pathways and spaces |
| Extended temperature range | Allows operation in 105°C (221°F) ambient environment providing error-free performance in high-density cabinets and large cable bundles running PoE+ or PoE++ applications |
| Highest port density | All testing and headroom based on 48-port/1RU panels |
| Descending length cable markings | Easy identification of remaining cable to reduce installation time and cable scrap |

applications

The TX6A™ 10 Gig UTP Copper Cable is a component of the TX6A™ 10 Gig Copper Cabling System. Interoperable and backward compatible, this end-to-end system provides design flexibility to protect network investments well into the future.

Key applications include:


- 10GBASE-T Ethernet
- Data center I/O consolidation
- Data center server virtualization
- Consolidation of network interconnects
- Back-bone aggregation
- Parallel processing and high speed computing

TX6A™ 10Gig UTP Copper Cable: Standard Compliant Plus

additional specifications

| Mechanical Test | |
|---------------------------------------|-------------------------------------|
| Ultimate Breaking Strength | > 90 lbf (400 N) |
| Minimum Bend Radius | 4 x cable diameter |
| Electrical Test | |
| DC Resistance | <9.38 Ohm per 328 ft. (100m) |
| DC Resistance Unbalance | <5% |
| Mutual Capacitance | <5.6 nF per 328 ft. (100m) at 1 kHz |
| Capacitance Unbalance | <330 pF per 328 ft. (100m) at 1 kHz |
| Characteristic Impedance | 100 Ohm +/-15% up to 100 MHz |
| Nominal Velocity of Propagation (NVP) | Plenum (CMP): 70% |
| Operating Voltage, Maximum | 80 V |

cable construction

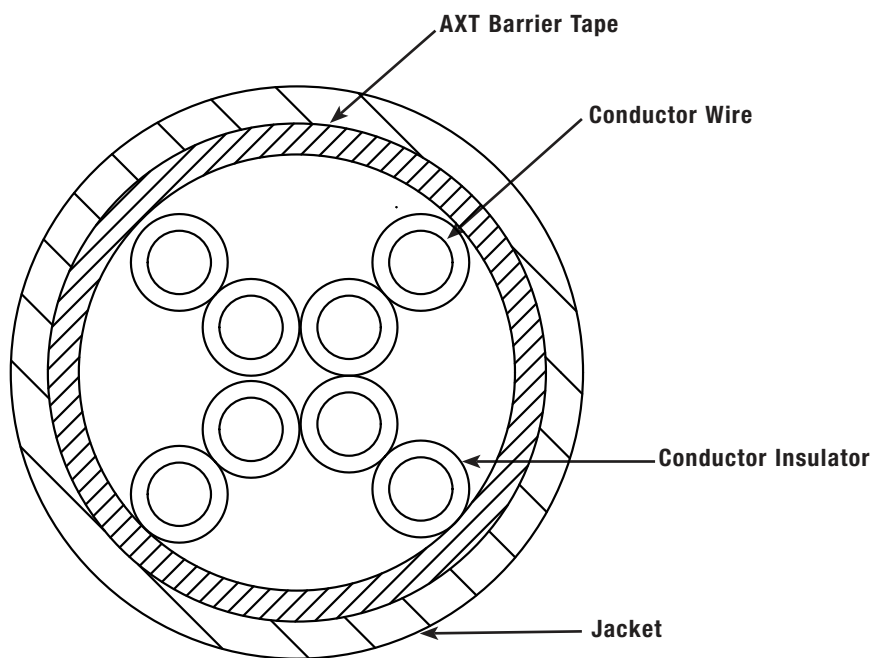

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

© 2021 Panduit Corp.
ALL RIGHTS RESERVED.
COSP503--WW-ENG
5/2021